




PRO SPORT LT600 SPECIFICATIONS (NZ)

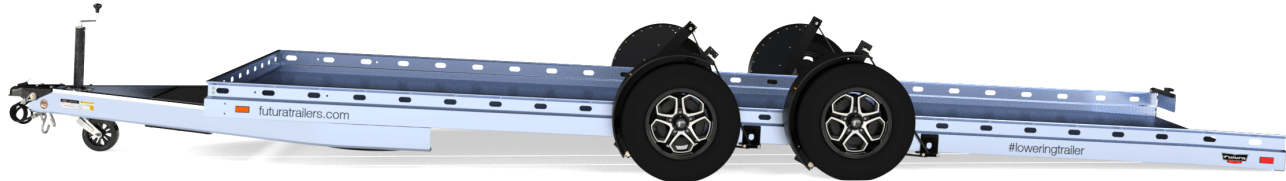

THE TRAILER YOUR CAR WOULD CHOOSE

DECK LENGTH 6000 mm	DECK WIDTH 2050 mm
OVERALL LENGTH 7500 mm	OVERALL WIDTH 2550 mm
FENDER HEIGHT Fender on 235 mm Fender off 180 mm (approx)	GROUND CLEARANCE 385 mm
G.V.W.R. 2500 kg	G.A.W.R. (each axle) 1700 kg
TARE WEIGHT 650 kg	LOAD CAPACITY 1850 kg
DECK ANGLE Only 3 degree	FLARED TAIL WIDTH 2195 mm

ENGINEERED TO BE EFFORTLESS

REMOVABLE FENDERS Extruded aluminium, powder coated	LICENCE PLATE BRACKET Aluminium, fold up
TIE POINTS Continuous airline track and slotted chassis rail	RECOVERY WINCH 12V electric with wireless remote
JACK Centre mount jockey wheel, auto stow wheel	COUPLING 1 7/8 Snap-on steel coupler

WHEELS 13" Shiftr alloy	TYRES 165R 13C 8 PLY Light Truck
AXLE (patented) 1700 kg galvanised steel torsion	SUSPENSION Independent torsion arm (PU)
HUBS 1700 kg	BRAKES Electric
WINCH 12V electric winch with wireless remote control	RIGGING Double braided 12mm UHMWPE synthetic rope
BATTERY 12V 30AH Gel deep cycle	LIGHTING Micro LED fender mounted clearance Recessed LED stop, tail, indicators Combined LED/reflector marker lights
CHARGING Onboard DC-DC to trailer plug aux pin and solar panel	ELECTRIC CONNECTOR 7-Way RV, flat pin trailer plug
BUILT TO LAST A LIFETIME	
FINISH - ALUMINIUM PARTS Silver anodising and black powder coating	FINISH - STEEL PARTS Hot dip galvanised
CHASSIS & TONGUE Extruded aluminium 6005-T6 Extruded 6005-T6 C section	DECK Extruded aluminium 6005-T6 interlocking panels