




## SUPER SPORT LT500 SPECIFICATIONS (NZ)

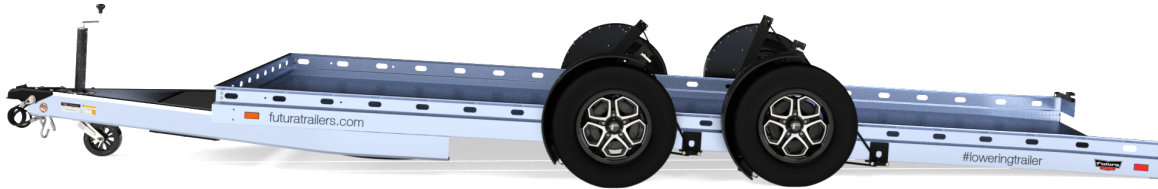

### THE TRAILER YOUR CAR WOULD CHOOSE

<b>DECK LENGTH</b> 5000 mm	<b>DECK WIDTH</b> 2050 mm
<b>OVERALL LENGTH</b> 6500 mm	<b>OVERALL WIDTH</b> 2550 mm
<b>FENDER HEIGHT</b> Fender on 235 mm Fender off 180 mm (approx)	<b>GROUND CLEARANCE</b> 385 mm
<b>G.V.W.R.</b> 2500 kg	<b>G.A.W.R. (each axle)</b> 1700 kg
<b>TARE WEIGHT</b> 600 kg	<b>LOAD CAPACITY</b> 1900 kg
<b>DECK ANGLE</b> Only 3 degree	<b>FLARED TAIL WIDTH</b> 2195 mm

### ENGINEERED TO BE EFFORTLESS

<b>REMOVABLE FENDERS</b> Extruded aluminium, powder coated	<b>LICENCE PLATE BRACKET</b> Aluminium, fold up
<b>TIE POINTS</b> Continuous airline track and slotted chassis rail	<b>RECOVERY WINCH</b> 12V electric with wireless remote
<b>JACK</b> Centre mount jockey wheel, auto stow wheel	<b>COUPLING</b> 1 7/8 Snap-on steel coupler

<b>WHEELS</b> 13" Shiftr alloy	<b>TYRES</b> 165R 13C 8 PLY Light Truck
<b>AXLE</b> (patented) 1700 kg galvanised steel torsion	<b>SUSPENSION</b> Independent torsion arm (PU)
<b>HUBS</b> 1700 kg	<b>BRAKES</b> Electric
<b>WINCH</b> 12V electric winch with wireless remote control	<b>RIGGING</b> Double braided 12mm UHMWPE synthetic rope
<b>BATTERY</b> 12V 30AH Gel deep cycle	<b>LIGHTING</b> Micro LED fender mounted clearance Recessed LED stop, tail, indicators Combined LED/reflector marker lights
<b>CHARGING</b> Onboard DC-DC connected to trailer plug aux pin and solar panel	<b>ELECTRIC CONNECTOR</b> 7-Way RV, flat pin trailer plug
<b>BUILT TO LAST A LIFETIME</b>	
<b>FINISH - ALUMINIUM PARTS</b> Silver anodising and black powder coating	<b>FINISH - STEEL PARTS</b> Hot dip galvanised
<b>CHASSIS &amp; TONGUE</b> Extruded aluminium 6005-T6 Extruded 6005-T6 C section	<b>DECK</b> Extruded aluminium 6005-T6 interlocking panels