

# Bullerjan.®

Bullerjan cook

Bullerjan **B<sup>2</sup>flex** Box

Das Original.



### The Bullerjan cook -

A compact storage stove with cooking option.

The new Bullerjan cook is bursting with function - in addition to being able to prepare food on a large hotplate, it also stores heat. Thanks to the 6 cm thick fireclay lining (70 kg), the cook stores a large part of the heat produced during combustion and then releases it into the room where it is installed for a period of 4-5 hours after the fire in the stove has already gone out.

The solid, cast-iron body of the cook is almost "indestructible" - a guarantee of 15 years underlines the quality and durability of this stove. It goes without saying that the cook burns efficiently and in an environmentally friendly manner and is therefore suitable for unrestricted approval.

**Product features and equipment**


- Nominal heat output 7 kW, 80% efficiency
- Combustion chamber lined with 6 cm thick fireclay
- Hotplate with a diameter of 27 cm
- Stove body made of cast iron, black
- 15 years warranty with product registration
- Unrestricted approval

**Technical data**

|                                      |                       |
|--------------------------------------|-----------------------|
| Heat output                          | 7,0 kW                |
| Efficiency                           | 80 %                  |
| Dust                                 | 31 mg/m <sup>3</sup>  |
| CO content (13 % O <sub>2</sub> )    | 750 mg/m <sup>3</sup> |
| Nox (13 % O <sub>2</sub> )           | 118 mg/m <sup>3</sup> |
| Exhaust gas mass flow rate           | 8,0 g/s               |
| Average flue gas temperature Average | 226 °C                |
| delivery pressure                    | 12 pa                 |
| Fuels                                | Scheitholz, 33 cm     |
| Energy efficiency                    | 118                   |
| Energy class                         | A+                    |
| Connection                           | 13 cm Diameter        |
| Height                               | 77,8 cm               |
| Width                                | 48,6 cm               |
| Depth                                | 59,0 cm               |
| Weight                               | 150 kg                |
| Distance to combustible materials    |                       |
| Side                                 | 40 cm                 |
| Rear                                 | 40 cm                 |
| Front                                | 80 cm*                |



A+

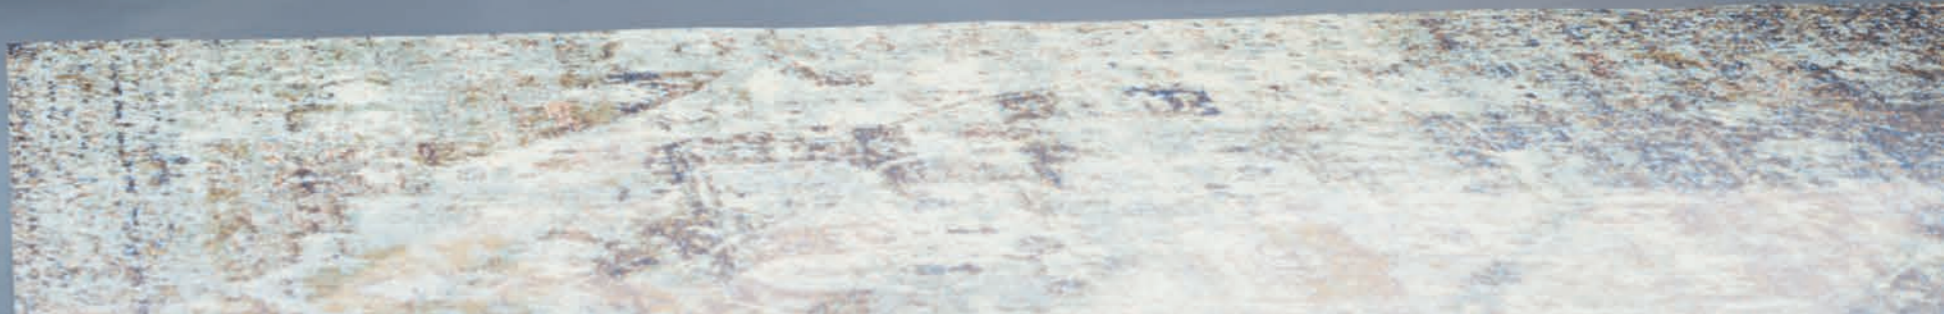



**Special offer!  
Bullerjan  
B² flex BOX**

**The Bullerjan B² flex BOX -  
Timeless, compact and above-average efficiency.**

**Our special offer model B² flex BOX impresses with its timeless functional design, its outstanding space heating performance and extremely efficient and thus resource-saving combustion.**

**The B² flex BOX is optionally available with side panels made of steel or handmade ceramic. Due to its small size, the B² flex BOX finds enough space even in small rooms.**

**Product features and equipment**

- Nominal heat output 5 kW, efficiency 88 %.
- Self-closing and locking door with large viewing window
- Effective pane flushing
- Extremely robust combustion chamber made of 4 mm thick steel - lined with high-quality vermiculite
- Flue pipe connection possible to the rear or top
- Unrestricted approval
- Optionally room air independent - tested according to DIBt without surcharge
- 5-year warranty with product registration

**Technical data**

|                                      |                 |
|--------------------------------------|-----------------|
| Heat output                          | 5 kW            |
| Efficiency                           | 88 %            |
| Dust                                 | 36,9 mg/m³      |
| CO content (13 % O2)                 | 1172,9 mg/m³    |
| Nox (13 % O2)                        | 79,3 mg/m³      |
| Exhaust gas mass flow rate           | 4,11 g/s        |
| Average flue gas temperature         | 223 °C          |
| Average delivery pressure            | 12 pa           |
| Fuels                                | wood logs 25 cm |
| Energy efficiency                    | 118             |
| Energy class                         | A+              |
| Flue gas connection                  |                 |
| Height centre of flue gas connection | 15 cm           |
| Supply air connection                | 113,5 cm        |
| Height centre supply air connection  | 10 cm           |
| Height                               | 51,5 cm         |
| Width                                | 125,5 cm        |
| Depth                                | 41,8 cm         |
| Weight with cladding Steel           | 35,7 cm         |
| Weight with cladding Ceramic         | 130 kg          |
|                                      | 163,6 kg        |

**Distance to combustible materials**

|       |       |
|-------|-------|
| Side  | 40 cm |
| Rear  | 20 cm |
| Front | 80 cm |



**A+**

# Bullerjan®

**Bullerjan GmbH**  
**Neuwarmbüchener Straße 2**  
**D-30916 Isernhagen-Kirchhorst**  
**Tel +49 (0)5136/9775-0**  
**Fax +49 (0)5136/9775-10**  
**[www.bullerjan.com](http://www.bullerjan.com)**  
**[info@bullerjan.com](mailto:info@bullerjan.com)**

**[www.bullerjan.com](http://www.bullerjan.com)**