


0001/S9H3R6HBM

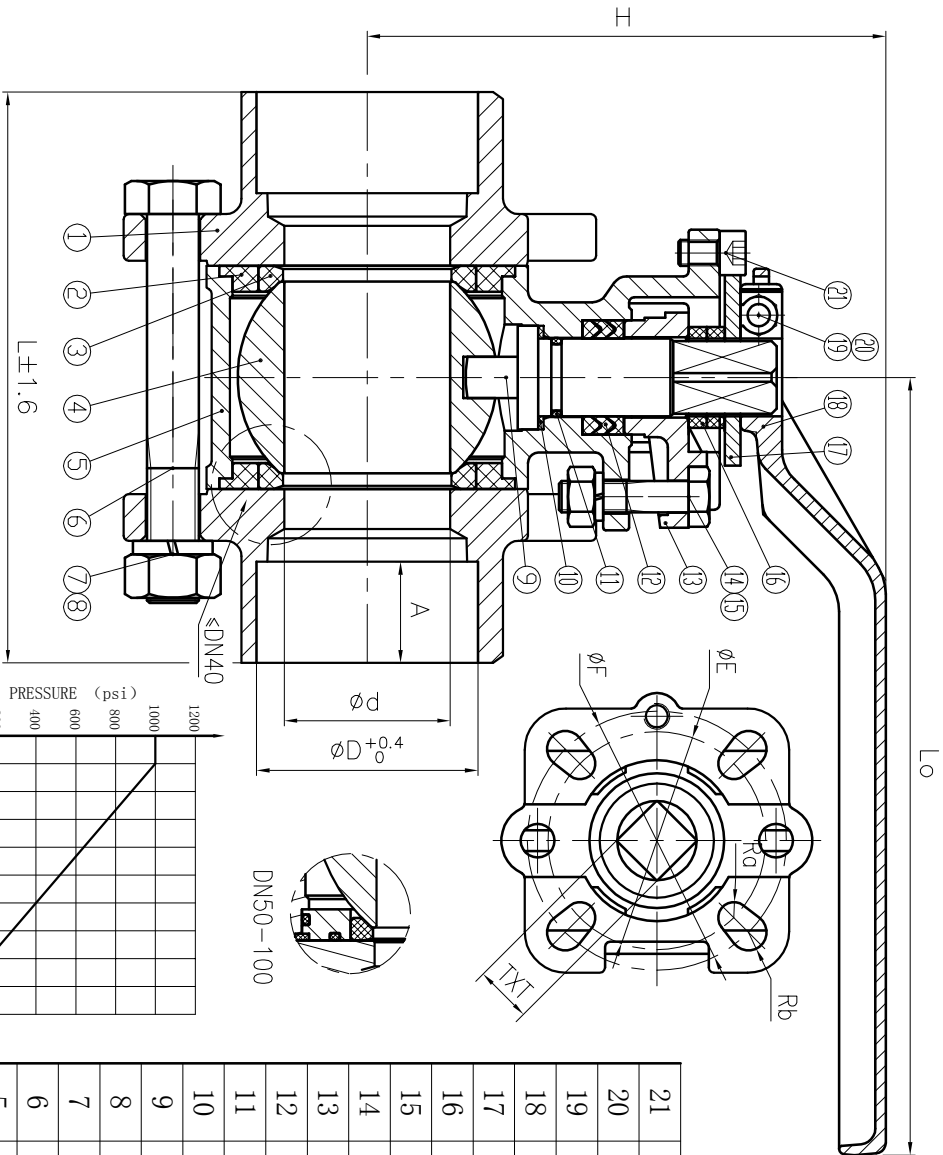

NOTE:

1. Design and Manufacture for valve according to ASME B16.34.
2. Inspection and Test for valve according to API 598.

NPS	L	d	D	A	W	H	E	F	a	b	T	Weight (lb)
1/2"	2.953	0.591	0.858	0.394	5.118	3.209	1.417	1.654	0.118	0.118	0.354	-
3/4"	3.150	0.768	1.071	0.512	5.118	3.307	1.417	1.654	0.118	0.118	0.354	-
1"	3.543	0.984	1.335	0.512	5.906	3.563	1.654	1.969	0.118	0.138	0.433	-
1 1/4"	4.331	1.260	1.681	0.512	5.906	3.937	1.654	1.969	0.118	0.138	0.433	-
1 1/2"	4.724	1.496	1.921	0.512	7.874	4.646	1.969	2.756	0.138	0.177	0.551	-
2"	5.512	1.929	2.409	0.630	7.874	4.921	1.969	2.756	0.138	0.177	0.551	-
2 1/2"	6.299	2.520	2.909	0.630	9.449	5.433	2.756	2.756	0.177	0.177	0.551	-
3"	7.087	3.031	3.535	0.630	10.630	6.496	2.756	4.016	0.177	0.217	0.669	-
4"	8.465	3.898	4.535	0.748	12.598	8.150	2.756	4.016	0.177	0.217	0.866	-

Nominal pressure	1000Psi		Test medium	Water temperature	Normal temperature
	Shell test	Seal test			
Test pressure	10.4	7.6	Water	temperature	temperature
Gas seal test	0.6		Air		
Applicable medium	Water, Oil, Gas				
Applicable temperature	-20~450°F				

NO.	DESCRIPTION	Q'TY	MATERIAL
21	BOLT	1	A193 B8
20	NUT	1	A194 8
19	BOLT	1	A193 B8
18	HANDLE	1	STEEL
17	STOPPER	1	SS304
16	WASHER	1	PVC
15	NUT	2	A194 8
14	BOLT	2	A193 B8
13	GLAND	1	A351 CF8
12	PACKING	-	RP7FE (New)
11	O-RING	1	VITON
10	STEM WASHER	1	RP7FE (New)
9	STEM	1	A276 316
8	NUT	-	A194 8
7	SPRING WASHER	-	304
6	HEXAGON HEAD BOLT	-	A193 B8
5	BODY	1	A351 CF8M
4	BALL	1	SS316
3	SEAT	2	RP7FE (New)
2	GASKET	2	RP7FE (New)
1	BONNET	2	A351 CF8M

MARK	BEFORE MODIFIED	AFTER MODIFIED	DATE	SCALE
DR.A.		APP.		
CHK.		DATE		

<b>ANIX®</b>		ANIX VALVE USA	
3PC Ball Valve 1000PSI, SW		RP7FE (Special), ISO HIGH MOUNT PAD	
BYH63R6S/1000			