



since 1984®

AIR fair

EMISSION MONITORING SYSTEMS

DM 9600

Precision, digital manometer

P | ΔP | T | ΔT



High precision pressure and temperature measurement



DM 9600

Professional, versatile, easy to handle

The DM 9600 measures gas flow pressure...

With differential temperature inputs and an Auxiliary option, all thermometer and gas detector needs can be met as well.

The DM 9600 has these unique features

- Electronic, long-term stable pressure sensors and automatic zero point measurement
- Measuring ranges from ± 75 ... $\pm 7,000$ hPa
- Fiber glass reinforced enclosure with integrated magnets
- Infrared interface for printer
- Li-ion battery for up to 20 hours of operation
- Display of the measurement results optionally in mbar, Pa, hPa, bar, inH2O and many others
- Graphic display of the measurement process
- Simultaneous temperature measurement possible (type K temperature sensor)

Optional features

- AUX socket to connect external transducers, e.g. Gas Detector
- Dual Bluetooth module for wireless data exchange with MRU apps
- Measurement program for usability test and accessories
- HC probe (gas detector)
- Various temperature sensors
- IR desktop printer
- Transport case
- PC software MRU4Win




The device details

The special features at a glance




Robust design with large color display

Fiber glass reinforced housing, hose connections and 2.8" TFT display ensure durability and ease of use

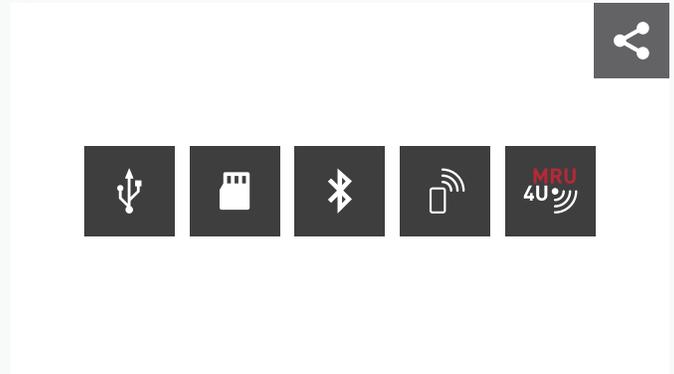


Interfaces for documenting measurement results

USB, Micro SD, Bluetooth, IR (thermal printer), App compatible

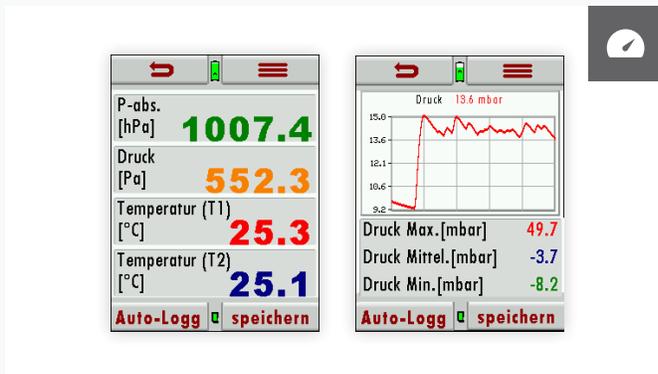


Pressure measurement

Exemplary measurement windows

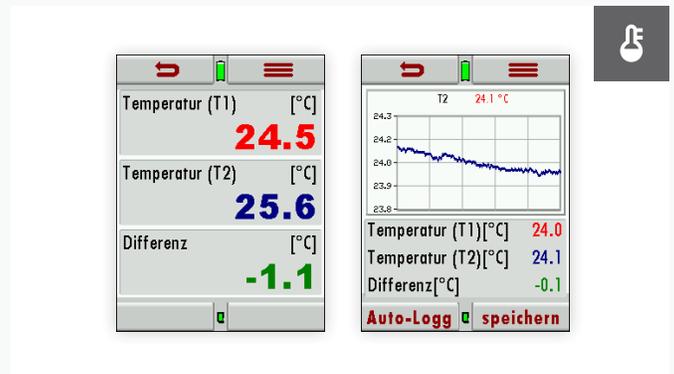


Temperature measurement

Detailed data and tracking

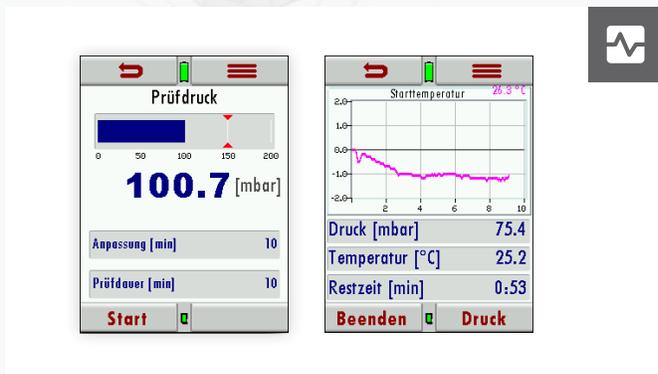

Leak test

Graphic interface and display

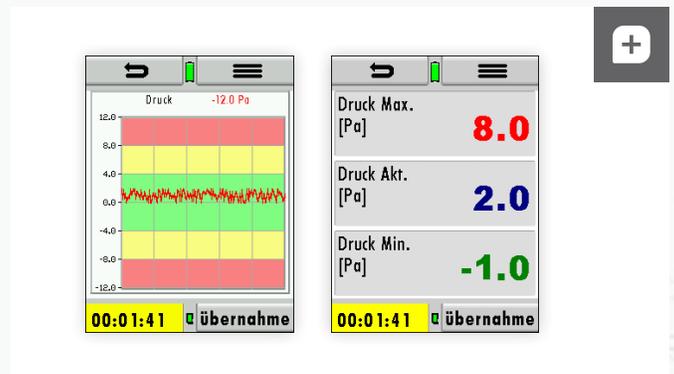

Numerous optional measurements possible

Leak detection, exhaust gas back pressure, room climate, CO + CO2 environment, 4- / 8-Pascal test, flow rate / flow velocity, usability test (TRGI), numerous pressure ranges

DM 9600

TECHNICAL SPECIFICATIONS

| Measuring ranges | Resolution | Accuracy | Stability 32 ... 122 °F (0 ... 50 °C) | |
|------------------|------------|----------|--|-----------|
| +/- 75 hPa | (30 "H2O) | 0.1 Pa | +/- 2 Pa abs. or 0.5 % v. mr | +/- 0.4 % |
| +/- 150 hPa | (60 "H2O) | 0.01 Pa | +/- 0.03 hPa abs. or 0.5 % v. mr | +/- 0.4 % |
| +/- 350 hPa | (140 "H2O) | 0.01 Pa | +/- 0.3 hPa abs. or 0.5 % v. mr | +/- 0.5 % |
| +/- 1,000 hPa | (14 psi) | 0.1 Pa | +/- 1.0 hPa abs. or 1 % v. mr | +/- 0.5 % |
| +/- 7,000 hPa | (100 psi) | 0.1 Pa | +/- 1.0 hPa abs. or 1 % v. mr | +/- 0.5 % |

| General technical data | |
|------------------------|--|
| Display | 2.8" touch-screen |
| Measuring units | Pa, hPa, mbar, bar, psi, mmHg, inHg, inH2O, °C, °F |
| Zeroing | Automatically |
| Interfaces | Mini-USB, Micro-SD, Dual Bluetooth (Optional) |
| Power supply | Lithium-Ion battery |
| Dimensions (W x H x D) | 3.23" x 6.65" x 1.42" (82 x 169 x 36 mm) |
| Weight | Approx. 14 ounces (400 g) |

Data subject to change without notice.

Distributed by:



625 Peachtree Street
Cocoa, FL 32922
Phone: 1-321-223-7500



info@diamondsci.com
www.DiamondSci.com

