


PRODUCT SPECIFICATION

DESCRIPTION

Stranded Plain Annealed Copper Wire, 2 Cores,
FRPVC Insulation, Rip Cord, FRPVC Sheath.
CM/ CL3 compliant.

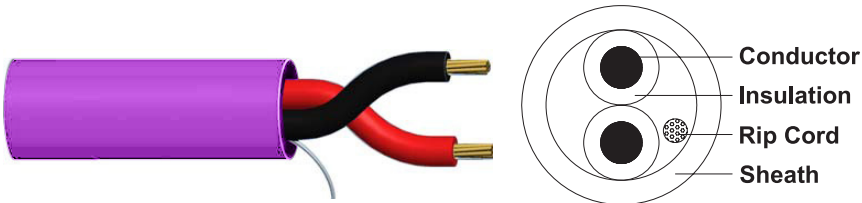

CONSTRUCTION

Conductor	
Material :	Plain Annealed Copper Wire
Size :	16AWG
Construction :	Stranded (65/0.16mm)
Insulation	
Material :	FRPVC
Nominal O.D :	2.3mm
Color :	Black, White, Red, Green
Filler	
Material :	Rip Cord
Sheath	
Material :	FRPVC
Nominal O.D :	5.8mm
Color :	Violet
PHYSICAL PROPERTIES	
Min. Bend Radius	58mm
Operating Temperature	-15oC to 90oC
ELECTRICAL PROPERTIES	
Max. Conductor DC Resistance @20°C	14.8Ω/km
Voltage test : Core to Core	1000Va.c/1min

APPLICABLE STANDARD

CM/ CL3
EU RoHS Complies