

INSTRUCTION MANUAL

MEGAPROCESS

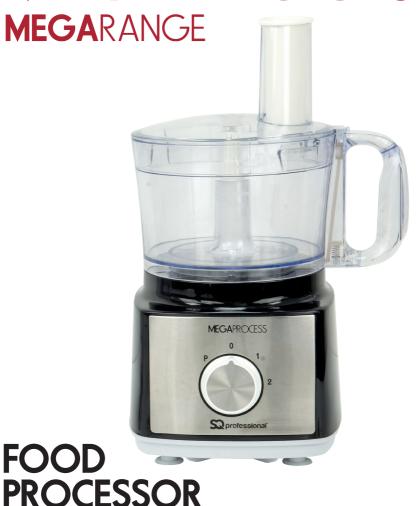


TABLE OF CONTENTS

FEATURES P	PAGE (
SPECIFICATIONS P	PAGE (
IMPORTANT SAFEGUARDS	AGE 4
BEFORE FIRST USE	AGE 5
OPERATING INSTRUCTIONS	PAGE 5
FOOD PROCESSING	PAGE 5
ASSEMBLY OF THE MIXING BOWL	AGE 5
CHOPPING, KNEADING, WHISKING, EMULSIFYINGP	AGE (
SLICING, GRATING, SHREDDING, CUTTING	AGE (
JUICING P	PAGE 7
ASSEMBLY OF THE CITRUS JUICER	PAGE 7
DISASSEMBLY OF THE MIXING BOWL	PAGE 7

BLENDING	PAGE 8
ASSEMBLY OF THE BLENDING JUG	PAGE 8
DISASSEMBLY OF THE BLENDING JUG	PAGE 8
CDINIDINIC	2105 0
GRINDING	PAGE 9
ASSEMBLY OF THE GRINDING MILL	PAGE 9
DISASSEMBLY OF THE GRINDING MILL	PAGE 9
SPEED SETTINGS	PAGE 10
CLEANING	PAGE 10
TROUBLESHOOTING	PAGE 10
WIRING	PAGE 11
ENVIRONMENTAL PROTECTION	PAGE 11
SERVICE	PAGE 11
GUARANTEE	PAGE 11

IMPORTANT!

Due to sharp parts and potential hazards, this appliance is not suitable for the use of children under 16 years old.

Children under the age of 16 must be supervised by an adult at all times if using or cleaning the appliance.

Even when off please keep the appliance and mains cable out of the reach of children. This is not a toy!

The appliance can be used by persons with reduced physical, sensory or mental capabilities if they have been given supervision and instruction and understand the use and hazards involved.

Always disconnect the appliance from the power socket if it is left unattended and before assembling, disassembling or cleaning.

If the mains cable is damaged, it must be replaced by qualified persons in order to avoid any hazards.

FEATURES

- Measuring cap
- Blending jug lid
- Blending jug
- Connector
- Safety interlocks
- Motor unit
- Rotary switch
- Pusher
- Mixing bowl cover
- Mixing bowl
- Citrus juicer cone
- Citrus juicer basket
- Drive shaft
- Chopping blade
- Chopping blade covers
- (6) Kneading blade
- Blade retainer
- Blade disc
- Fine slicing blade
- Coarse slicing blade
- Wavy slicing blade
- Fine shredding blade
- Coarse shredding blade
- French fry blade
- Slurry blade
- Emulsifying disc
- Grinding mill cover
- Grinding mill base
- Assembled grinding mill
- Assembled citrus juicer
- Assembled mixing bowl







AC 220-240V Rated Voltage: Frequency: 50/60Hz Rated Power: 750W Processing Bowl Capacity. 2. OL 1.8L Blending jug Capacity:





READ THE INSTRUCTIONS AND KEEP THEM SAFE. REMOVE ALL PACKAGING BEFORE USE.

IMPORTANT SAFEGUARDS

WHEN USING ANY ELECTRICAL APPLIANCE, BASIC SAFETY PRECAUTIONS SHOULD ALWAYS BE FOLLOWED, INCLUDING THE FOLLOWING:

- Read all instructions carefully before using the appliance.
- 2 This appliance is intended for household use only. It is not suitable for commercial use such as staff kitchen areas and other working environments.
- 3 Ensure that the appliance is always placed on a firm and flat surface, away from the edge of the worktop. Do not place the appliance onto a metal tray or metal surface whilst in use. Do not place the appliance on, or near, a hot gas or electric burner or in a heated oven. Do not operate the appliance with wet hands or barefoot.
- 4 Keep the appliance and mains cable away from edges of worktops and out of reach of children. Route the mains cable to avoid overhanging, being caught or tumbling over.
- 5 Do not let the mains cable run across an open space, such as between a low socket and a table. or across any hot area, such as a cooker as heat may damage the mains cable.
- 6 The connections on both sides of the mains cable (the appliance and socket) should never be strained. If the mains cable is damaged it must be replaced by a qualified person or service to avoid any hazards.
- 7 Do not use the appliance in a bathroom, near water, or outdoors. Do not immerse any of the parts (appliance, mains cable, plug) in water or other liquids to protect against fire, electric shock and personal injury.
- 8 Do not use the appliance if it is damaged or is malfunctioning. Do not leave the appliance unattended whilst in use. Use and store it out of reach from children.
- **9** This appliance must not be operated by an external timer or a remote control system.
- 10 SQ Professional Ltd will not be held liable for eventual damages to persons, animals or objects caused by incorrect installation or deriving from improper, erroneous or unreasonable use.
- 11 The motor unit 6 top should always be kept dry. Before cleaning and drving, disconnect the power

- supply. Ensure that the motor unit 6 is completely dry before you reconnect the appliance to the power supply.
- 12 To reduce the risk of injury, ensure that blades are correctly attached. Always handle the blades carefully, as they are extremely sharp.
- 13 Ensure the blending jug 13, mixing bowl 10, grinding mill and any attachments are securely in place before operating the appliance.
- 14 Always close the blending jug lid 2 and have the mixing bowl cover 10, citrus juicer 10 or grinding mill securely locked in place before you switch the appliance on. Do not open the blending jug lid 1 or the mixing bowl cover 1 and do not try to remove the citrus juicer o or grinding mill whilst the appliance is running.
- 15 Never switch the appliance on when it is empty. Always ensure there is at least the minimum amount of liquid or solid ingredients in the blending jug 3, mixing bowl 10 or grinding mill 20 when operating this appliance.
- 16 This appliance includes a safety interlocks 5 which prevent operation unless the accessories are securely installed.
- 17 This appliance incorporates a protective device against high temperatures. The appliance will automatically switch off if the temperature becomes too high and will resume operation when the motor has sufficiently cooled down.
- 18 Do not operate the appliance for more than 1 minute at a time. After 1 minute let the appliance rest for 10 minutes before the next cycle. After 5 cycles let the appliance cool down for 90 minutes. This may lengthen the lifespan of the machine.
- 19 Keep hands and utensils out of the blending jug 69 or mixing bowl 10 while the appliance is running, to reduce the risk of severe injury to persons or damage to the appliance.
- 20 Always use the pusher 8 to push food down the feeder tube. Never use your fingers or other utensils.

- 21 Never process hot liquids and ingredients, as they may be ejected due to a sudden build-up of steam.
- 22 Always switch off the appliance and unplug the mains cable from the power socket before changing attachments, or approaching parts that move while in use.
- 23 Unplug the appliance when not in use.

- 24 Ensure that the appliance has come to a complete stop before cleaning and storing away. Keep the attachments, motor unit 6, cable, and plug away from sources of heat. Store in a dry place.
- 25 Do not use this appliance for any other purpose, aside from its intended use.
- 26 Use the blending jug 1, mixing bowl 1, citrus juicer 1, grinding mill 2 and the attachments only with the motor unit 3 supplied (and vice versa) and do not tamper with the connector 1 in any way.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE!

BEFORE FIRST USE

BEFORE ATTACHING OR REMOVING ANY PARTS, MAKE SURE THE MAINS CABLE IS UNPLUGGED FROM THE POWER SOCKET AND THE ROTARY SWITCH

IS IN THE 0 POSITION.

Before first use, wash all parts that will come into contact with food with warm soapy water and dry thoroughly (see the section on **CLEANING**).

ALWAYS TAKE CARE WHEN HANDLING THE STAINLESS STEEL BLADES AS THEY ARE VERY SHARP.

OPERATING INSTRUCTIONS

Follow the IMPORTANT SAFEGUARDS and following instructions to achieve the best results and to keep your appliance in good working condition.

- Do not exceed the recommended maximum quantities.
- Do not use this appliance to process ingredients that are hard (e.g. frozen meat, inedible food such as bones and pips), rubbery or sticky (e.g. candied orange peel).

FOOD PROCESSING

- Always remove the blades before removing the ingredients from the mixing bowl 10.
- This appliance will not operate if the mixing bowl cover 9, citrus juicer 8, blending jug lid 9 or grinding mill 8 are not correctly fitted.
- Do not attempt to remove the blending jug lid or mixing bowl cover while the appliance is in operation.

ASSEMBLY OF THE MIXING BOWL

ENSURE THAT THE APPLIANCE IS UNPLUGGED FROM THE POWER SOCKET, THEN PLACE THE DRIVE SHAFT \oplus ON THE MOTOR UNIT \oplus .


- A Mount the mixing bowl ¹⁰ on the drive shaft ¹³ with the handle on the right-hand side. Align the triangle ▼on the bottom edge of the mixing bowl ¹⁰ with the open lock symbol ¹⁰ on top of the motor unit ¹³.
- B Turn the mixing bowl clockwise to lock it in place. The triangle ▼on the bottom edge of the mixing bowl should be aligned with the closed lock symbol on top of the motor unit to operate the appliance.
- C Install the attachments (see PAGES 6 9).
- D Place ingredients into the mixing bowl 10. Large pieces of food should be cut into 2cm cubes first.
- E Place the mixing bowl cover 9 onto the mixing bowl 10 with the feeder tube on the right-hand side. Align the rectangle 1 on top of the mixing bowl cover 10 with the open lock symbol 10 on the upper rim of the mixing bowl 10. Hold the feeder tube with your left hand and the mixing bowl 10 handle with your right hand. Turn the mixing bowl cover 10 clockwise until it clicks into place. This will engage the safety interlocks 10 in the handle and ensure the mixing bowl 10 is securely attached, so that the appliance is safe to operate. Plug the mains cable into the power socket. Rotate the rotary switch 10 to the desired speed to start food processing.

CHOPPING, KNEADING, WHISKING, EMULSIFYING

ATTACHMENT	FOOD TYPE	MAX. QUANTITY	TIME	
14	Chocolate	100g		
CHOPPING BLADE	Hard Cheese	200g		
	Meat	500g	30-60sec	
	Fruit & Vegetables	100-300g		
Chopping	Onions	500g		
(6) KNEADING BLADE	Flour	300g		
KINEADINO BEADE	Soft Cheese	300g	30-180sec	
Kneading / Whisking	Eggs	5		
EMULSIFYING DISC	Egg whites, whipping cream, oil		30-60sec	
Creaming / Whisking				

- A Assemble the mixing bowl @ as described in ASSEMBLY OF THE MIXING BOWL, PAGE 5.
- **B** Place the blade retainer **(1)** onto the shaft in the middle of the mixing bowl 10.
- C Fit the suitable attachment (see the table) onto the blade retainer 10 and ensure that it sits flat at the bottom of the mixing bowl 10.
- D Place the ingredients into the bowl.
- E Fit the mixing bowl cover 10 onto the mixing bowl (1), ensure it is locked, and switch the appliance on as described in ASSEMBLY OF THE MIXING BOWL, PAGE 5.

EXERCISE EXTREME CARE WHEN HANDLING THE CHOPPING BLADE 4 AS IT IS VERY SHARP. ONLY HOLD THE PLASTIC PART. ALWAYS ATTACH THE BLADE COVERS (B) WHEN CHOPPING BLADE (B) IS NOT IN USE.

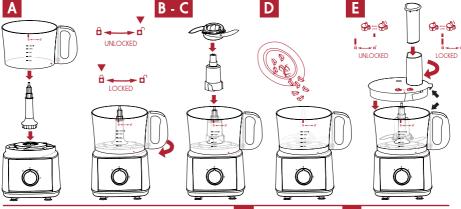


SLICING, GRATING, SHREDDING, CUTTING

Assemble the mixing bowl as described in ASSEMBLY OF THE MIXING BOWL - STEPS 1 - 2. PAGE 5.

F Hold the blade disc ® with one hand. Insert one of the blades 1999 1999 by hooking the protrusion on the flat side under the inner part of the opening on the blade disc ¹³. Press the rounded side of the blade down with the tab inside the blade disc ® opening, until it locks in place. To remove or replace the blade See DISSASEMBLY OF THE MIXING BOWL, BLADE DISC, PAGE 7.

BLADES ARE VERY SHARP. HANDLE CAREFULLY.

- G Attach the assembled blade disc ® onto the drive shaft 13.
- H Place the mixing bowl cover onto the mixing bowl and switch the appliance on as described IN ASSEMBLY OF THE MIXING BOWL - STEPS 5 - 8, PAGE 5. Always use the pusher 10 to push food down the feeder tube. Never use your fingers or other utensils.



JUICING

ASSEMBLY OF THE CITRUS JUICER

- A Assemble the mixing bowl **10** as described in **ASSEMBLY OF THE MIXING BOWL, PAGE 5**.
- Attach the citrus juicer cone 10 to the citrus juicer basket 10
- Mount the assembled citrus juicer onto the drive shaft .
- K Ensure that the tab on the side of the citrus juicer is above the mixing bowl handle. Align the rectangle on the rim of the citrus juicer with the open lock symbol on the upper rim of the mixing bowl on. Firmly holding the tab turn the citrus juicer clockwise until it locks into place. The rectangle on its rim should be aligned with the closed lock symbol on the upper rim of the mixing bowl on.
- L Turn the rotary switch 10 to setting 1. Carefully place half of the citrus fruit on top of the citrus juicer cone 10, hold firmly and slowly press it down to extract the juice.

USEFUL TIPS

- Ensure the chopping blade (1), kneading blade
 (1) or emulsifying disc (2) are set up inside the mixing bowl (10) before adding ingredients.
- To activate a short, powerful pulse movement, turn the rotary switch 10 to the P setting and hold for the desired time.
- To avoid cutting the ingredients too fine use the PULSE function repeatedly a few times.
- When processing chocolate or cheese avoid processing for a prolonged time. The appliance may heat up and the ingredients will start to melt.
- When using the french fry blade @ insert the potatoes into the feeder tube lengthwise to get longer sticks. If the potato is too large, cut it to the width of the feeder tube.
- Never force the pusher 3 down the feeder tube or overfill it. Feed the food gradually.
- When slicing or shredding soft foods (cucumbers, pears, cheese, and similar) use speed setting 1 to avoid turning the food into a pulp like texture.
- Process large quantities of food in batches up to maximum 1200ml.
- If food gets stuck in the feeder tube switch the appliance off as described in DISSASEMBLY OF THE MIXING BOWL and remove the mixing bowl cover ①. Remove the food from the feeder tube and cut it to smaller pieces before processing.



DISASSEMBLY OF THE MIXING BOWL

When food processing is finished, turn the rotary switch 10 to 10, ensure the appliance has come to a complete stop and then unplug the mains cable from the power socket.

Hold the handle of the mixing bowl (1) with your right hand and the feeder tube on the mixing bowl cover (9) with your left hand, and turn it anti-clockwise to release the safety interlock (5) then remove the mixing bowl cover (9).

Remove the attachments as described below:

- BLADE DISC carefully lift the blade disc ® from the mixing bowl ® by holding the middle part of the drive shaft ®. To remove the blade № № № turn the blade disc ® upside down. Firmly hold down the side opposite to the blade, and push the rounded side of the blade down, until it pops out.
- CHOPPING BLADE KNEADING BLADE EMULSYFING DISC carefully lift the blade retainer ① from the mixing bowl ②. Carefully remove the chopping blade ③, kneading blade ⑤ or emulsifying disc ⑤ from the blade retainer ①.
- ctrrus juicer turn the citrus juicer basket (1) anticlockwise to release the safety interlock (3), then lift and remove it from the mixing bowl (10).

Push the handle of the mixing bowl 100 anti-clockwise to unlock it.

Lift the mixing bowl **10** carefully and empty the ingredients. Remove the drive shaft **13**.

EXERCISE EXTREME CARE WHEN HANDLING BLADES AS THEY ARE EXTREMELY SHARP.

BLENDING

ASSEMBLY OF THE BLENDING JUG

ENSURE THAT THE APPLIANCE IS UNPLUGGED FROM THE POWER SOCKET THEN REMOVE THE DRIVE SHAFT @ FROM THE MOTOR UNIT 6. BLADES ARE EXTREMELY SHARP. HANDLE CAREFULLY.

- M Place the blending jug 3 (without the blending jug lid 2 and measuring cap 1) onto the motor unit 6 with the handle on the right-hand side.
- N Align the triangle Von the bottom edge of the blending jug 3 with the open lock symbol on top of the motor unit 6. There is no safety interlock
 - 5 sensor on the left-hand side of the motor unit
 - 6 therefore the appliance will not operate if the blending jug 3 handle is on the left-hand side.

Once the blending jug 3 has been correctly aligned, turn its handle in a clockwise direction until it clicks and locks in place.

- O Place ingredients into the blending jug 3, then place the blending jug lid 2 on top with the protruding tab covering the blending jug 3 spout. Firmly push the blending jug lid 2 onto the rim of the blending jug
- P Align the protrusions on the sides of the measuring cap 10 with grooves in the opening on top of the blending jug lid 2. Push the measuring cap 1 down and turn clockwise to lock it. To add liquids during the blending process, remove the measuring cap 10 by turning it anti-clockwise and slowly pour the liquid into the blending jug 3 through the opening in the blending jug lid 2.
- Q Turn the rotary switch 10 to the desired speed setting to start the blending process.

DISASSEMBLY OF THE BLENDING JUG


When blending process is finished, turn the rotary switch 10 to 10, ensure the appliance has come to a complete stop and then unplug the mains cable from the power socket.

Remove the measuring cap 10 by turning it anticlockwise and lifting it from the blending jug lid 2. Firmly holding the handle of the blending jug 3 with one hand, carefully lift and remove the blending jug lid with the other hand.

Turn the blending jug 3 anti-clockwise to disengage the safety interlocks 6 then lift it from the motor unit 6 and pour the contents out.

USFFUL TIPS

- Always stabilise the blending jug 3 by placing your hand on top of the blending jug lid 2 when operating this appliance.
- To achieve the best results when pureeing solid ingredients, cut them into small pieces first (2-3cm). Place small portions into the blending jug 3 then add gradually. DO NOT OVERLOAD.
- When mixing solid ingredients, start off with a small amount of liquid. Gradually add more of the liquid through the opening in the blending jug lid 2.
- For stirring solids or very thick liquid ingredients, we recommend that you use the blender in **PULSE** mode to prevent the blades from becoming stuck during use.
- If blending warm liquids or ingredients, always ensure that they are cooled down before blending. Do not fill the glass jug over 1250ml mark.

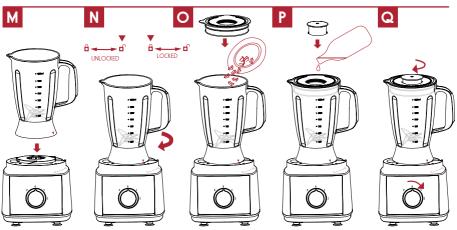

GRINDING

ASSEMBLY OF THE GRINDING MILL

ENSURE THAT THE APPLIANCE IS UNPLUGGED FROM THE POWER SOCKET THEN REMOVE THE DRIVE SHAFT @ FROM THE MOTOR UNIT @. ALWAYS ENSURE THAT THE SEALING GASKET ON THE GRINDING MILL BASE @ IS PROPERLY FITTED. BLADES ARE EXTREMELY SHARP. HANDLE CAREFULLY.

- R Turn the grinding mill cover @ upside-down and fill it with the dry ingredients. Do not fill above the MAX mark.
- 5 Turn the grinding mill base [®] upside-down and insert it into the grinding mill cover [®], aligning triangle ▼ under the MAX line with the open lock symbol [®] under the grinding mill base [®].
- T Holding the grinding mill cover ## firmly, turn the grinding mill base ## anti-clockwise until it locks into place.

 Ensure the grinding mill cover ## is fitted securely.
- U Mount the assembled grinding mill ② on the motor unit ③ aligning the triangle ▼ under the MAX mark on the grinding mill cover ② with the open lock symbol ③ on top of the motor unit ⑤.
 - Turn the grinding mill ② clockwise until it locks in place and the triangle ▼ under the MAX mark is aligned with the closed lock symbol ② on the motor unit ③. Turn the rotary switch ③ to desired speed.

DISASSEMBLY OF THE GRINDING MILL

When grinding process is finished, turn the rotary switch 10 to 0, ensure the appliance has come to a complete stop and then unplug the mains cable from the power socket.

Remove the grinding mill **10** from the motor unit **10** by turning it anti-clockwise.


Turn the grinding mill 9 upside-down and hold firmly with one hand. With the other hand, turn the grinding mill base 8 clockwise, carefully remove it and scoop the ingredients out of the grinding mill cover 9.

USEFUL TIPS

- Always stabilise the grinding mill ® by placing your hand on top of the grinding mill cover ® when operating this appliance.
- For best results grind in intervals of 30 seconds with a 1 minute pause in between. Repeat the grinding process until you are happy with the grind consistency.
- Use PULSE setting in short intervals for coarse grinds or to crush the ingredients.
- Only grind spice seeds that do not contain moisture or oil such as peppercorn, coriander seeds, mustard seeds and similar.
- Grinding extremely hard, oily, moist or sticky ingredients may damage this appliance.
- Hard grains such as corn, wheat, rye and similar may cause damage to the grinding mill cover .
- Nuts contain a lot of oil which will release during the grinding process and may clog the grinding mill base
- NEVER ADD OILS OR LIQUIDS WHILE GRINDING.

Experimenting with the length of grinding will enable you to get your preferred grind.

To yield the best flavour and aroma always grind fresh ingredients. Freshly ground coffee and spices have more flavour and are best when around just before use.

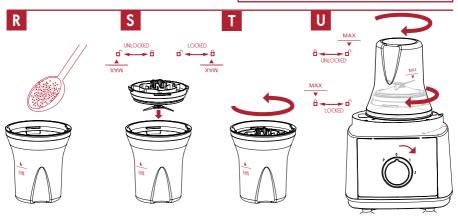

SPEED SETTINGS

- 1 LOW SPEED for whipping, emulsifying, kneading, folding, light blending of liquid ingredients. grating, slicing, shredding, juicing.
- 2 HIGH SPEED chopping, whisking, grinding, heavy blending with solid ingredients and thicker liquids.
- P PULSE (SHORT BURSTS OF VERY HIGH SPEED) for pregrinding or coarse grinding, rough blending of solid ingredients and thick liquids, chopping, and short, powerful pulse movements when needed. The rotary switch **10** does not permanently engage in the PULSE setting. You have to hold the rotary switch or turn it repeatedly to the PULSE setting).

CLEANING

AFTER USING THIS APPLIANCE ALWAYS TURN THE SWITCH TO THE O SETTING AND UNPLUG THE APPLIANCE FROM THE MAINS SOCKET.

MOTOR UNIT

NEVER IMMERSE THE MOTOR UNIT IN WATER.

Wipe the motor unit 6 clean with a damp cloth and dry immediately with a soft cloth to avoid scratches and water marks on the surface.

LIGHT CLEANING

MIXING BOWL - BLENDING JUG - fill the empty mixing bowl or blending jug 3 half way with tepid soapy water. Place the mixing bowl 10 or blending jug 13 on the motor unit 6. Insert the blade retainer 10 with one of the attachments (10, 10 or 10) into the mixing bowl 10 and attach the mixing bowl cover 9. Place blending jug lid 2 with measuring cap 1 on the blending jug 3.

Turn the rotary switch 10 to PULSE setting several times, each time holding for a few seconds.

Empty the mixing bowl 10 or blending jug 3 and rinse until clean. Dry with a soft, lint free cloth.

GRINDING MILL - wipe the grinding mill base @ with a damp cloth or sponge, using tepid soapy water, if necessary.

HANDLE VERY CAREFULLY, BLADES ARE EXTREMELY SHARP.

Carefully remove any stuck food remnants from the blades with a small dish-washing brush. Dry immediately with a soft, lint free cloth.

Wash the grinding mill cover 10 with warm soapy water and dry thoroughly. You may keep the grinding mill @ assembled when not in use to prevent any harm from sharp blades.

THOROUGH CLEANING

EXERCISE EXTREME CARE WHEN HANDLING BLADES AS THEY ARE VERY SHARP, KEEP THE CHOPPING BLADE COVERS (B) ATTACHED WHEN CHOPPING BLADE 4 IS NOT IN USE.

Ensure that the mixing bowl 00, blending jug 30 and arindina mill cover @ are completely empty.

Disassemble the blade disc @ and the citrus juicer @.

Use a small dish-washing brush to remove the stuck food from the fine, coarse and wavy slicing blades 10 1 fine and coarse shredding blades 20 french fry 49 and slurry blades 45, around the blades inside the blending jug 3, on the grinding mill base 3 and from the slits on the citrus juicer basket 10.

Wash the mixing bowl 100 and mixing bowl cover 100. blending jug 3, blending jug lid 2 and measuring cap 10, grinding mill cover 20 and all the attachments with tepid soapy water.

Dry immediately with a soft, lint free cloth and store in a cool, dry place.

All parts except the motor unit 6 can be washed by hand or in a dishwasher.

Do not use harsh scourers and aggressive or abrasive detergents.

ENSURE THAT ALL PARTS ARE COMPLETELY DRY BEFORE ASSEMBLING AND OPERATING THIS APPLIANCE.

TROUBLESHOOTING

Appliance does not work	Check if the accessories are correctly assembled and attached.	
	Check the mains cable is correctly plugged into the power socket.	
	Check if the safety interlocks 5 are engaged.	
Appliance suddenly stops	Check if the safety interlocks 3 are engaged.	
during operation.	Re-assemble the mixing bowl (1) and the mixing bowl cover (9).	
The appliance is running but the attachments are	Ensure that the driving shaft (1) and the attachments are correctly installed.	
not working.	Check if there are any stuck ingredients that are blocking the blades.	

WIRING

THE APPLIANCE MUST NOT BE USED WITHOUT A FUSE COVER FITTED.

Should the mains cable or the plug become damaged, arrange for these to be replaced by Customer Service or a qualified person before continuing to use the appliance. This appliance is fitted with a 5A BS1362 fuse in a 5A BS1363 plug.

ENVIRONMENTAL PROTECTION

To avoid environmental and health problems due to hazardous substances in electrical and electronic goods, appliances marked with this symbol must not be disposed of with unsorted municipal waste, but recovered, reused or recycled.



SERVICE

The product is not user-serviceable. If it is not working, read the instructions, check the plug fuse and main fuse/circuit breaker. If it is still not working, consult your retailer.

If that does not solve the problem ring Customer Service - they may be able to offer technical advice.

Please have the **Model Number** to hand, as they will not be able to help you without it.

If you are advised to return the product to us, pack it carefully, include a note with your name, address, day phone number, and description of the problem.

If under a guarantee, say where and when it was purchased and include a valid VAT receipt. Send it to SQ Professional Ltd.

GUARANTEE

THE GUARANTEE FOR THIS PRODUCT IS COVERED BY SQ PROFESSIONAL LIMITED. ANY FAULTS WITH THIS PRODUCT ARISING THROUGH A MANUFACTURER DEFECT WILL BE COVERED FOR 1 YEAR FROM THE DATE OF PURCHASE, SUBJECT TO A VALID VAT RECEIPT BEING PRESENTED. THIS DOES NOT INCLUDE FAULTS OR DAMAGE CAUSED BY MISUSE OF GENERAL WEAR AND TEAR.

PLEASE CONTACT CUSTOMER SERVICES ON 01992 716 070 OR SEND AN E-MAIL TO INFO@SQPROFESSIONAL.COM, MONDAY TO FRIDAY FROM 09:30 - 17:30.

THIS DOES NOT AFFECT YOUR STATUTORY RIGHTS.



MEGARANGE



SCAN THE QR CODE TO EXPLORE OUR FULL PRODUCT RANGE.

WWW.SQPROFESSIONAL.COM

