



VCOM LOW VOLTAGE 80°C 30V COMPUTER CABLE (A group of white lettering)

REV	Change record	Change the date
A/0	Initial issue	2022-12-13

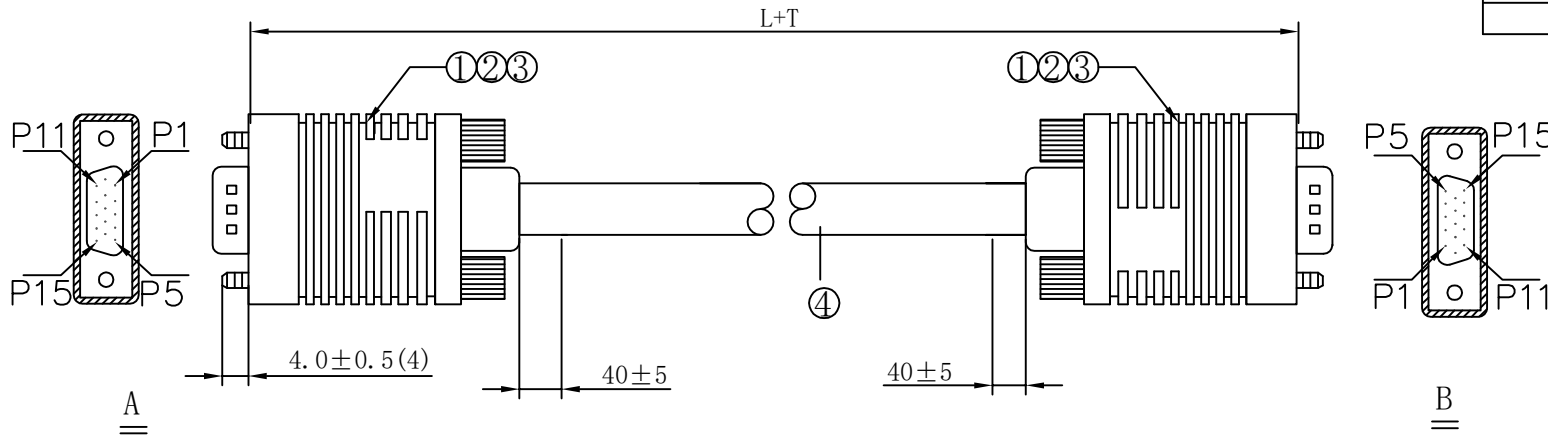

接线图:

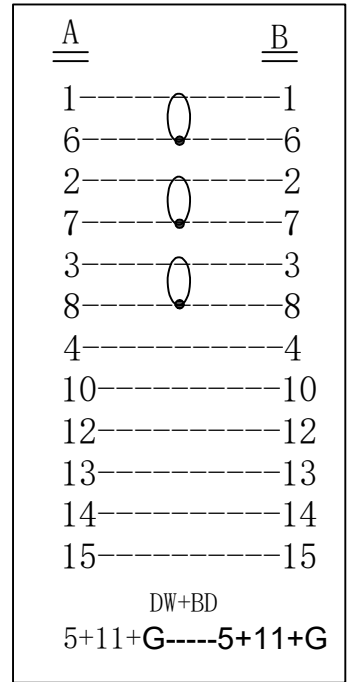

NO.	Cable length (L)	Cable tolerance (T)
1	1800MM	15MM
2	3000MM	30MM
3	5000MM	50MM
4	10000MM	100MM
5	15000MM	150MM

NO.	Cable length (L)	Cable tolerance (T)
6	20000MM	200MM
7	25000MM	250MM
8	30000MM	300MM

Attention: Said a coaxial line

Test Conditions:

1. 100% open & short circuit test;
2. Insulation Resistance: 2.0Mohm (MIN);
3. Conduction Resistance: 5.0ohm (MAX) at 300V DC/0.01S .

④	CABLE: VGA3COAXIAL+6C+AL/MY+DW+BD Black Jacket, OD:8.0mm "VCOM"	PCS	/	
③	THUMB SCREW: 2.3*45mm NICKEL PLATING	PCS	2	
②	OVER MOLDING:PVC BLACK	g	/	
①	HD15P MALE SOLDERING TYPE NICKEL PLATED	PCS	2	
NO.	The material content	Stock NO.	unit	quantity Mould NO.

VCOM VCOM INTERNATIONAL LTD.

TITLE	VGA (3+6)M/M	CUSTOMER	UNIT	mm	PAGE: 1 of 1
PART NO.	VC-F10-0001S	CUSTOMER NO.	SCALE		
PRODUCT NO.	CG361	REV:	A/0	DATE	2022-12-13
DRAWN BY: CHEN		CHECKED BY:		APPROVED BY: XIANG	