Silo 3W




The Silo collection inhabits many worlds at once, creating a striking metaphor for duality. Mysterious yet inviting, the true magic lies in how its rhythmic curves shape light and space around it. Made using custom aluminium extrusions, the modular uplight-downlight creates a theatrical yet sleek composition.

TYPE	Wall		
CONSTRUCTION	Powder coated, mirror polished or tumbled aluminum body Polycarbonate lens		
SPECIFICATIONS	Source: LED array, integrated Power consumption: downlight only- 12.7W downlight and uplight- 21.2W		
	Colour temperature: 3000K 2700K dim to warm 3000K to 2200K dim to warm 2700K to 2200K		
	Lumen output: 3000K downlight - 236Im 3000K downlight and uplight - 678Im 2700K downlight - 225Im 2700K downlight and uplight - 647Im		
	Colour rendering index: ≥90 CRI Colour consistency: 3 SDCM Expected lifetime: ≥50 000h		
WEIGHT	5.04lbs / 2.3Kg		
CERTIFICATIONS	ୁର୍ଭ୍ରଙ୍କ (୧ ଏହି୦୦୫.୨ ୦୦୦ IP20		
WARRANTY	2 years		


lambert&fils

Spec Drawings

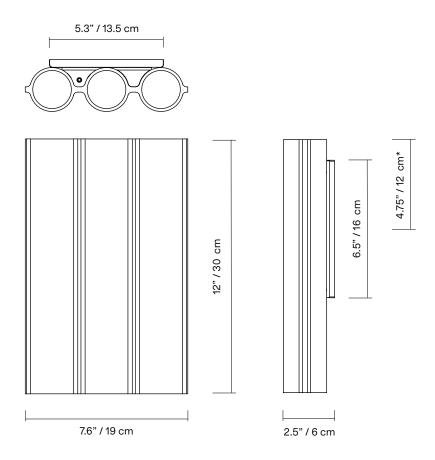


* For positioning of the junction box, note that the center of the luminaire is not the same as the center of the wall plate.

*dimensions are approximate and may vary slightly

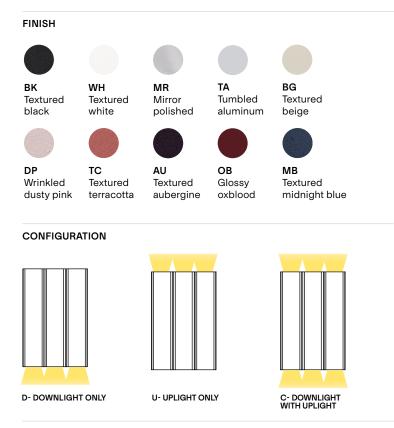

NOTES

- Must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
 Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions

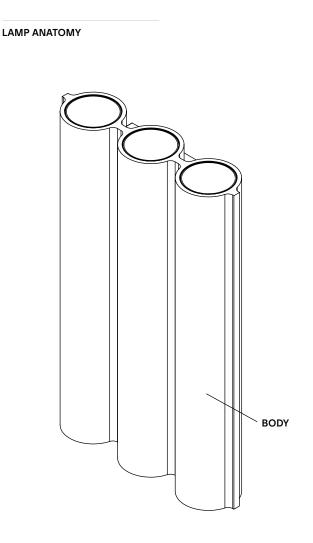

Order Guide: SKU

		Example	Fill with your selection
COLLECTION	SIL Silo	SIL	SIL
MODEL	3W	3W	3W
SHAPE	A	А	A
CONFIGURATION	 D Downlight only U Uplight only C Downlight with uplight 	D	
BODY	BKTextured blackWHTextured whiteMRMirror polished aluminumTATumbled aluminumBGTextured beigeDPWrinkled dusty pinkTCTextured terracottaAUTextured aubergineOBGlossy oxbloodMBTextured midnight blueCCCustom colour*	ВК	
COLOUR TEMPERATURE (CCT)	WLWarm light (2700K)NLNeutral light (3000K)D27Dim to warm (2700K-2200K)D30Dim to warm (3000K-2200K)CCTOther CCT available upon request**	WL	
DIMMING	ZT0-10V (120VAC only)PHPhase dimmingDADALI (220-240VAC only)	ZT	
FULL SKU		SIL3WADBKWLZT	
		NOTES	

*Custom colour available upon request. Material library on website.

**Specific CCT selection only available in 100k increments, from 2200K to 4000K inclusively and not available with Dim-to-Warm feature.