
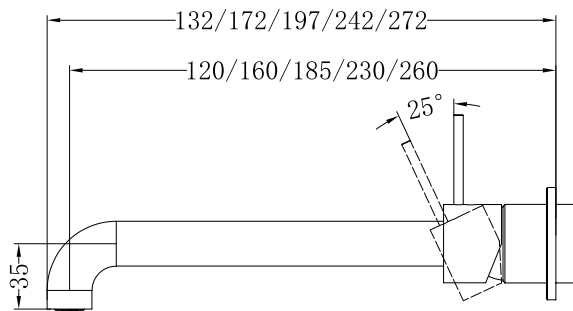


Mecca Wall Basin Mixer Separate Back Plate Handle Up Trim Kits

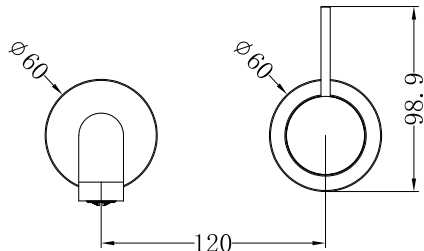

Dimensions are nominal measurements only.

SPECIFICATION

WELS RATING	5 STAR 6L/MIN
WATERMARK LICENSE	WM-060073
TEMPERATURE RATING	MIN 1°C-MAX 75°C
PRESSURE RATING	MIN 150KPa-MAX 500KPa

FINISH

	CHROME		MATTE BLACK
	NR221910d120/160/185/230/260tCH		NR221910d120/160/185/230/260tMB
	BRUSHED NICKEL		GUN METAL
	NR221910d120/160/185/230/260tBN		NR221910d120/160/185/230/260tGM
	BRUSHED GOLD		BRUSHED BRONZE
	NR221910d120/160/185/230/260tBG		NR221910d120/160/185/230/260tBZ
	MATTE WHITE		
	NR221910d120/160/185/230/260tMW		

MAINTENANCE AND CARE

All surfaces should be cleaned with mild liquid detergent or soap and water.

Do not use cream cleaners or citrus based cleaning products, as they are abrasive.

Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty.


PACKING INCLUDES

- 1x spout
- 2x plates
- 1x handle
- 1x cartridge bell
- 1x dressing ring




Versions: V2


Installation Instruction For Trim Kits

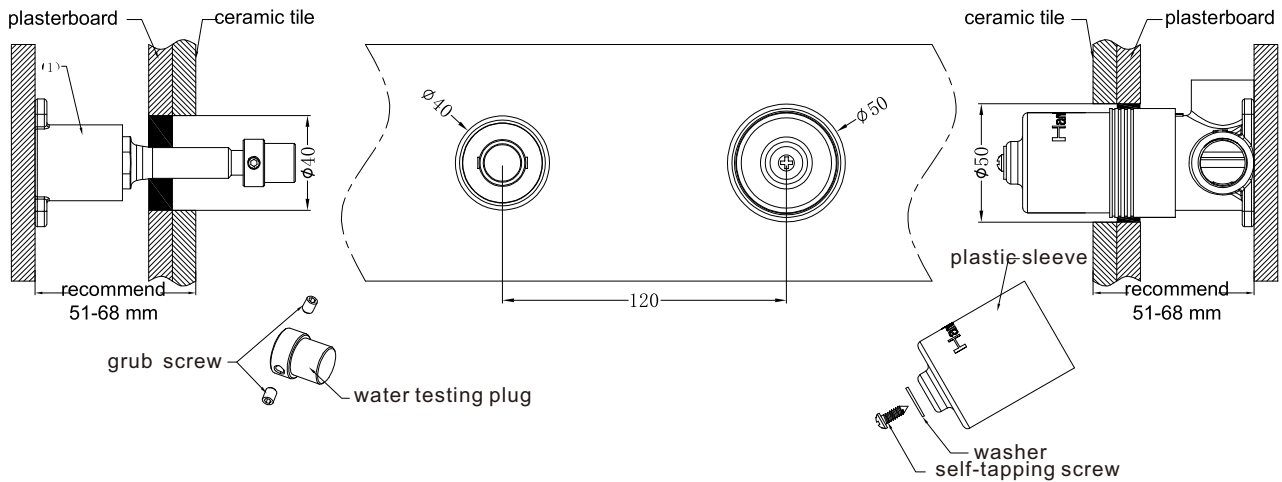

1. Drill a $\phi 50$ and a $\phi 40$ hole on ceramic tile, then install ceramic tile according to above picture.
2. Remove self-tapping screw, washer, plastic sleeve, grub screw and water testing plug.

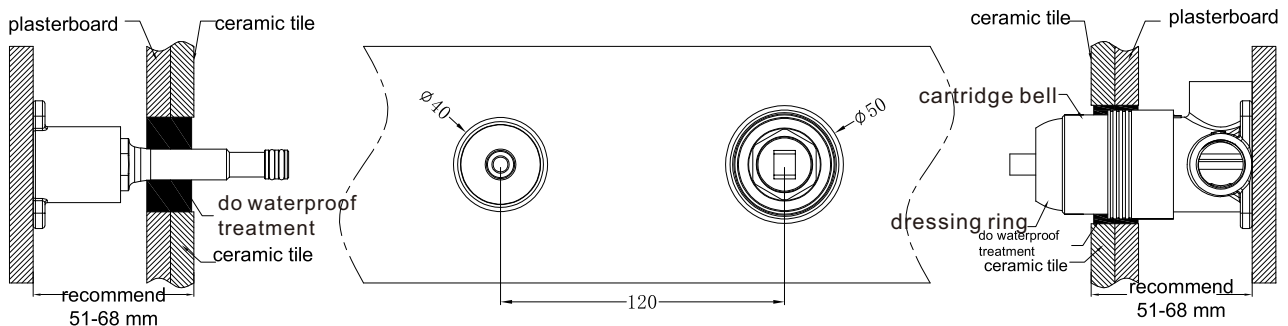

3. Put on cartridge bell.
4. Screw on dressing ring.
5. Do waterproof treatment for the gap between plastic sleeve and cartridge bell and gap between ceramic tile and spout.

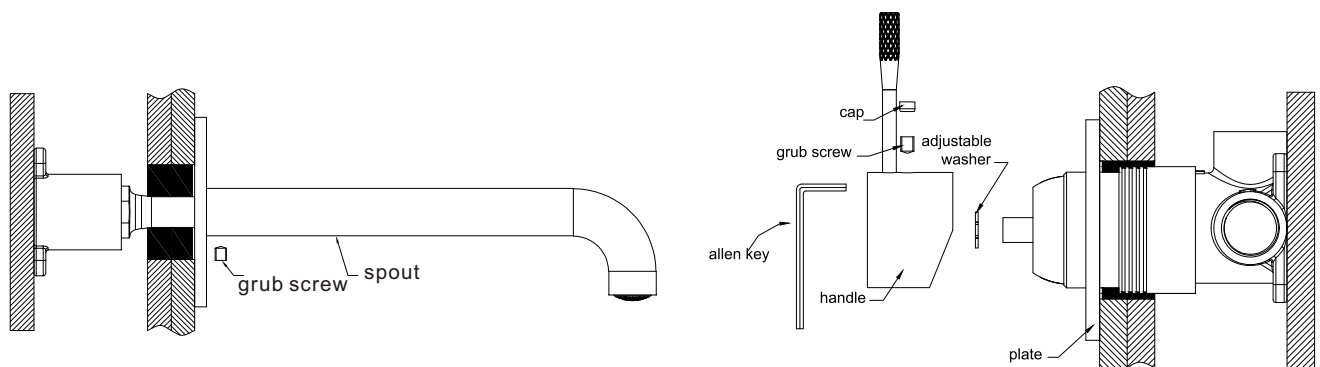

6. Put plate onto body.
7. Put adjustable washer onto cartridge stick, put on handle and tighten grub screw of handle firmly by allen key, put cap in grub screw hole.
8. Install spout onto body, tighten grub screw of spout firmly by allen key.