

Mecca Shower Mixer Divertor Systerm



Ø 26 250 Ø 41.8 885 170 29.5 97.8

Dimensions are nominal measurements only.







Versions: V1

SPECIFICATION

WELS RATING 4 STAR 7.5L/MIN

WATERMARK LICENSE WM-060073

TEMPERATURE RATING MIN 1°C-MAX 75°C

PRESSURE RATING MIN 150KPa-MAX 500KPa

FINISH

CHROME

NR221912ETCH

MATTE BLACK

NR221912ETMB

/

BRUSHED NICKEL

NR221912ETBN

NR221912ETBG

BRUSHED GOLD

GUN METAL

N

NR221912ETGM

BRUSHED BRONZE

NR221912ETBZ

MATTE WHITE

NR221912ETMW

MAINTENANCE AND CARE

All surfaces should be cleaned with mild liquid detergent or soap and water.

Do not use cream cleaners or citrus based cleaning products, as they are abrasive.


Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty

PACKING INCLUDES


- 1x plate
- 1x handle
- 1x cartridge bell
- 1x dressing ring
- 1x hand shower
- 1x hose
- 1x bracket
- 1x knob
- 1x sleeve




Installation Instruction




- 1.Install ceramic tile after drilling a $\phi 50$ hole and two $\phi 30$ holes.
- 2. Take off water testing plug.




4. Take off gauge, self-tapping screw, washer and plastic sleeve successively.





3.Put gauge onto outlet successively as above picture. Cut off remaining thread against to the cut off gauge.



- 5.Install cartridge bell and sleeve according to above picture.
- 6.Do waterproof treatment for gap of ceramic tile and cartridge bell and sleeve.
- $7. Screw\ dressing\ ring\ onto\ body.$









- 8. Apply thread sealant or teflon tap on outlet thread, tighten outlet onto outlet thread by wrench.
- 9.Install plate, washer, bracket onto body successively according to above picture.




Installation Instruction





10.Install plate, handle successively according to above picture.

 ${\bf 11.} In stall \ plate, knob \ successively \ according \ to \ above \ picture.$

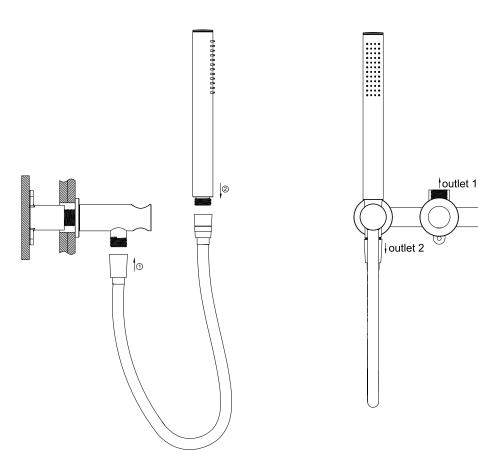

12. Connect bracket and hand shower with hose.

13.TEST & CHECK FOR LEAKS.

cold water inlet

hot water