





RGB PRO Line Flex Strip - black casing RGBW+BFS-24V-5M

Length: 1-, 5-meter, and custom reels

Wire Color: black, white, green

Output	
LED Type	SMD 5050
LED Channels	R-G-B-W
LED Count	70 per meter
LED-to-Chip Raio	7-to-1
Greyscale	16-bit, 65,536 dimming levels*
Control	
Individually Addressable	each set of 7 pixels
Control Systems	NDB+ (ArtNet, E1.31), WEC+, MeshTek BLE
Max Lights before power injection	approx. 350L
Max Distance before Power Injection	10 meters
Electrical & Safety	
Input Voltage	24 VDC
Current	0.015 Amps / pixel
Power	0.36 Watts / pixel
Wire	20 AWG, 3C, UV protected
Inline power injection	via Minleon Power T+'s & RGB+4A-24V
Physical	
Width	1-inch
Pitch	1-inch
Housing	silicone over black pcb
Connector Type	LLT twist-lock
Lead/End Wire length	6" (standard)
Operating Temperature	Neg -20 to +50 Cel. / Neg -4 to +122 Far.

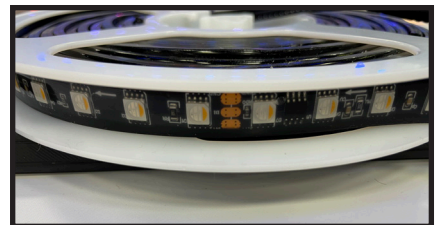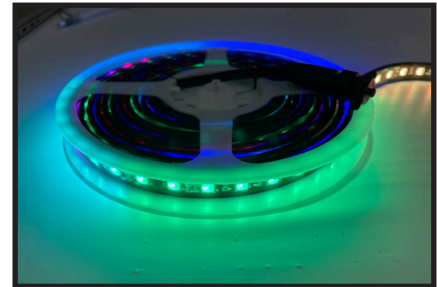

USA HQ
Mechanicsburg, PA
(717) 763-1055

www.minleonusa.com

Specifications as of Jan 2023 and are subject to change.

