


Wall-Wash Fixture

RGB+WWF-24Vdc

Output	
LED Type	COB20WRGB
LED Channels	R-G-B
LED Count	1
Greyscale	16-bit, 65,536 dimming levels*
Beam Angle	180-degrees
Control	
Individually Addressable	yes
Control Systems	NDB+ (ArtNet, E1.31), WEC+, MC+
Max Lamps before power injection	3 - 4
Max Distance before Power Injection	30-feet to be verified
Electrical & Safety	
Input Voltage	24 VDC
Current	0.83 Amps / lamp
Power	20 Watts / lamp
Wire	18 AWG, 3C, UV protected
Inline power injection	via Rainmin Power T+'s
Certifications	IP 65
Physical	
Housing	aluminum, powder coated base; glass cover
Size	~ 8" x 6" x 1.5"
Weight (kg)	~3 lbs.
Connector Type	LLT twist-lock
Mounting Option	180-degree adjustable yoke
Lead/End Wire length	6" (standard)
Operating Temperature	Neg -25 to +55 Cel. / -13 to 130 Far.

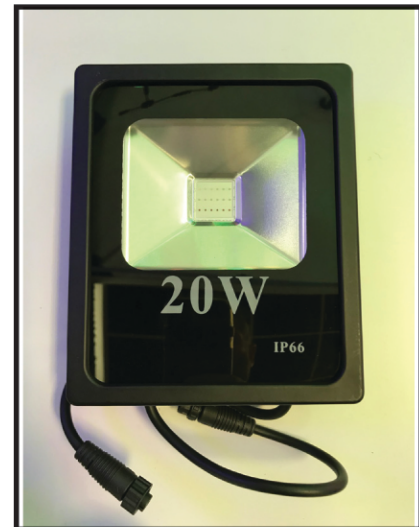

Distributed by



211 Regional Road 39, Zephyr, ONT., L0E 1T0
905 881-7942

www.illuminationscanada.com

* 8-bit via DDP.

Specifications as of March 2020 and are subject to change.

