

Universal Trolley

The CM Universal Trolley (UT) is designed to fit virtually all Columbus McKinnon powered chain hoists up to 3 ton capacities.

CM Lodestar; Classic Lodestar; the new 2-ton, single-reeved Lodestar; Valustar; ShopStar; Man Guard; AirStar and AirStar 6.

COFFING JLC, EC1, EC3, and CAH Small and Large frame.

BUDGIT & YALE BEHC (Manguard), KELC (Manguard), YJL, 2200 Air and 6000 Air.

BENEFITS & FEATURES

UNIVERSAL DESIGN REDUCES INVENTORY

Designed to fit most CMCO brand air and electric chain hoists up to 3 tons, the UT reduces inventory costs while increasing inventory flexibility.

THE SMART & ECONOMICAL CHOICE
With its very attractive price, the ability to be used with a multitude of hoists, and its long service life, the UT offers the greatest value of any trolley on the market today.

CONVERTIBLE

Plain trolleys equipped standard with geared trackwheels and side plate. Simply add a hand-geared kit to convert unit to a geared trolley in the field.

LONG LIFE & LOW MAINTENANCE

Dual tread wheels fit tapered or flat beams. Wheels include permanently lubricated shielded ball bearings for long life and low maintenance.

EASILY ADJUSTABLE TO FIT A WIDE RANGE OF BEAMS

The UT can be quickly and easily adjusted to fit the most popular beam flange widths. Maximum flange width of 8-5/8."

The rugged UT is competitively priced and engineered for maximum versatility and long service life. With 1, 2 and 3 ton (metric rated) capacities, the CM Universal Trolley is available as a convertible plain unit, a geared unit ideal for precise hoist positioning, and a motorized unit that's perfect for applications requiring high cycling and long distance hoist travel. The plain and geared versions of the Universal Trolley are CE Compliant, making them ideal for the global market.

OPERATOR SAFETY

The UT features wrap-around side plates. Drop lugs provide additional security to improve operator safety and protect the wheels.

PINNED SUSPENSION BOLT

Castle nuts are pinned to ensure the bolts stay tightened, increasing operator safety.

CORROSION RESISTANT

Zinc-plated bolts, nuts and washers along with painted frames protect against corrosion and wear.

MACHINED TREAD WHEELS

Ensure a better fit to the beam for smoother operation and longer life.


CSA PENDING

LIFETIME WARRANTY

Best in the industry.



PLAIN

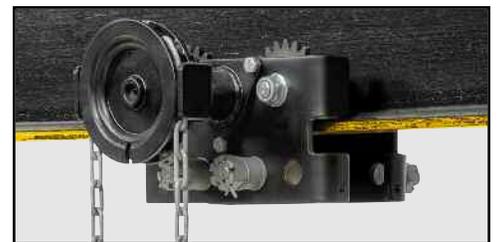

GEARED



MOTORIZED

PLAIN & GEARED

CM UT plain trolleys allow for manual positioning of hoist and load, while geared units are ideal for applications where precise positioning is required. CM UT geared trolleys feature standard hand chain drop in proportion to a 20-foot-lift hoist.

MOTORIZED

CM UT motorized trolleys are best for applications requiring high cycling and long-distance hoist travel.

SPEED

15, 35 and 75 FPM traverse speed.

AC POWER SUPPLY

208-230/460 3-60 HZ. Single-speed, three-phase controls standard.

NEMA 3R WEATHER PROOFING

EASY ACCESS CONTROL BOX

Control box design allows the entire cover to be removed for easy access to components. Control box case has a white background for increased visibility when wiring up the panel or making adjustments to controls.

CONVENIENT TOOL TRAY

Electrical panel cover can be used as a tray to hold tools when repairing or servicing on the hoist.