








REVISIONS		
REV	DESCRIPTION	DATE
A	DRAWN PER ECD-21-0008	10FEB2021

System Model: <b>S41 10R-VC G</b>			
OCU Model: <b>S41-G</b>			
MCU Model: <b>10R-VC-G</b>			
Configuration: <b>2OPT-9061-A203</b> <b>2OPT-9061-A303</b>			
Motors	Speeds	-	
4	1	-	
-	-	-	
Additional Functions	# OF RLY	Additional Functions	# OF RLY
ON - ALARM	1	-	-
-	-	-	-
-	-	-	-
-	-	-	-


FREQ. TABLE X  
B = 433-434  
D = 450-470  
E = 868  
F = 902-927  
G = 2.4GHz  
MT = MOMENTARY TX

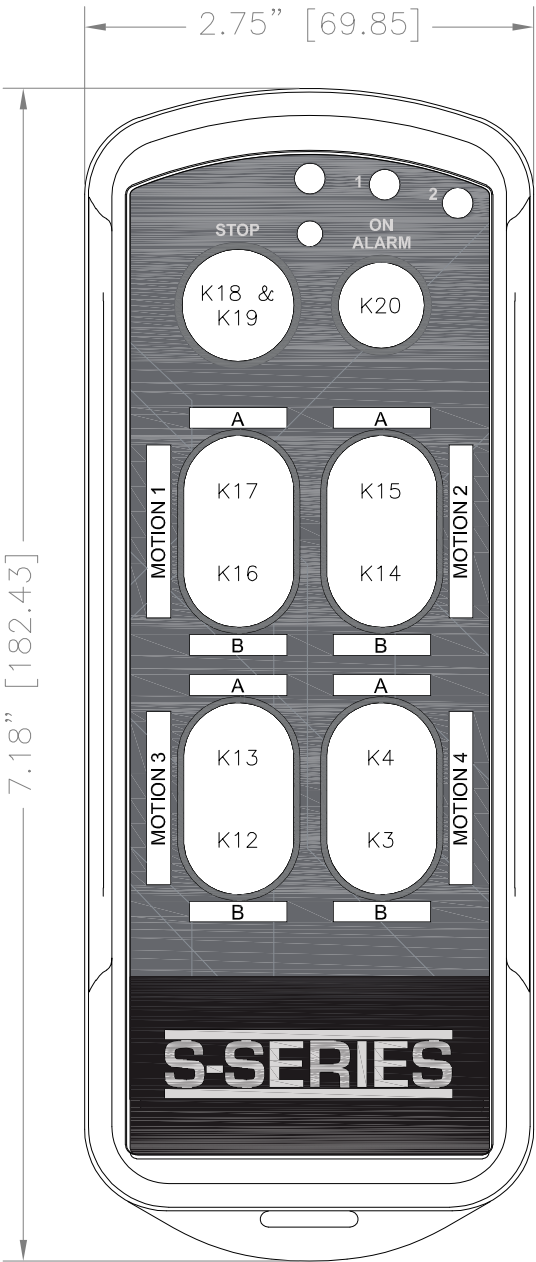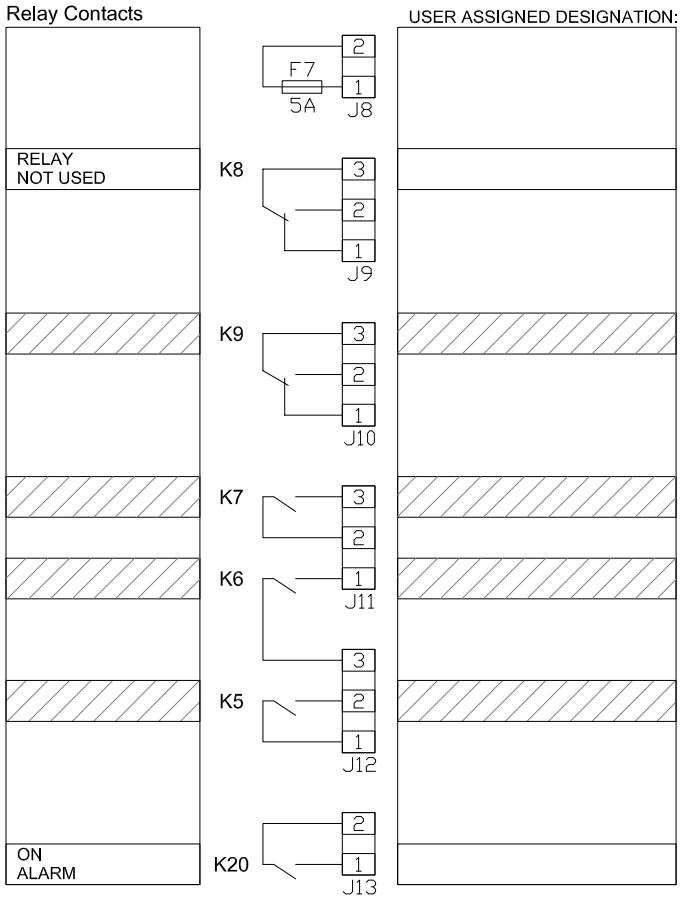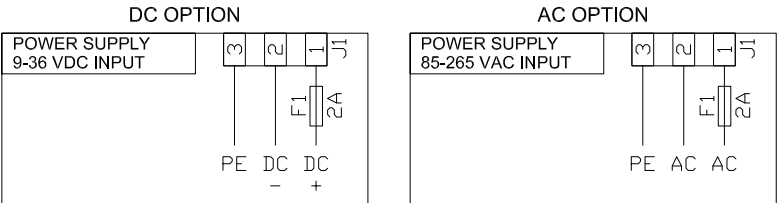

NOTES:

1. ALL RELAYS RATED AT 5A

2. COMMON TERMINAL FOR RELAY GROUPS RATED AT 6.5A

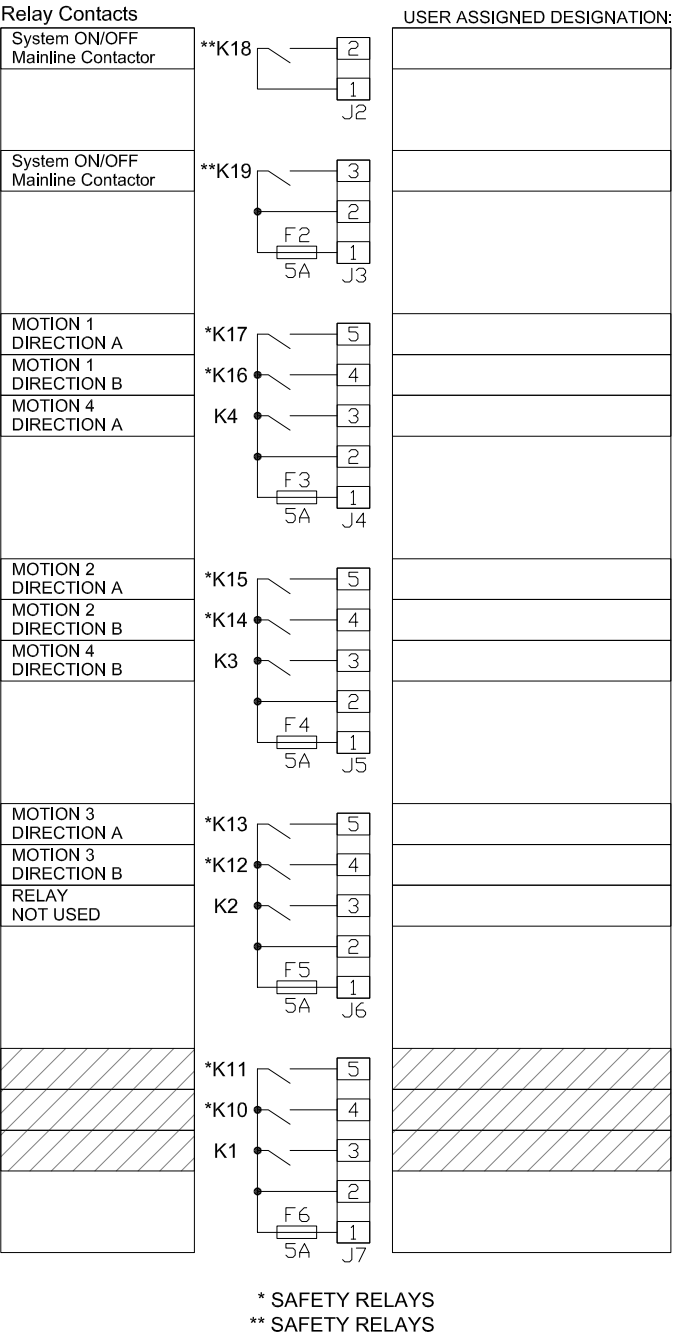

SIGNATURES		DATE	CATTRON™	
DRAWN: A. LEWIS		10FEB21	TITLE / DESCRIPTION <b>STANDARD WIRING LAYOUT</b> SERIES S41 10R OCU TO MCU CONFIGURATION	
CHECKED: D. STAGG		10FEB21		
ENG: D. STAGG				
Q.A.:				
THIS IS A CAD DRAWING. PREPARED IN ACCORDANCE WITH ANSI Y14		SIZE B	PART NO.	N/A
DO NOT SCALE DWG.		SCALE NTS	DRAWING NO.	9D04-9061-A203
SHEET 01 OF 01		REVISION A		

THIS DOCUMENT AND ALL INFORMATION CONTAINED WITHIN ARE THE EXCLUSIVE, CONFIDENTIAL AND PROPRIETARY PROPERTY OF CATTRON. IT IS NOT TO BE REPRODUCED, NOR IS IT OR ANY PORTION OF IT TO BE USED IN ANY MANNER WITHOUT THE PRIOR, WRITTEN APPROVAL OF CATTRON. FURTHERMORE, THIS INFORMATION CONTAINED WITHIN THIS CORRESPONDENCE IS ALSO TO BE HANDLED IN ACCORDANCE WITH ANY AND ALL CONFIDENTIALITY AGREEMENTS BETWEEN CATTRON AND THE RECEIVER OR USER OF THIS INFORMATION. © COPYRIGHT CATTRON 2019