

CTP Adjustable Trolley Clamp

Capacities up to 6,600 LBS.

The heavy duty adjustable trolley clamp designed for easy installation while offering superior strength and stability throughout its long service life.

QUICK & EASY INSTALLATION

The CTP Adjustable Trolley Clamp requires no tools for installation.

THE SMART & ECONOMICAL CHOICE

With its competitive price and universal hanging clevis able to accept most hoists, the CTP is a tremendous value.


CORROSION RESISTANT

Features a zinc-plated spindle for added protection against the elements.


SAFE & SECURE

The unique locking nut handle prevents spindle from loosening.

METRIC RATED

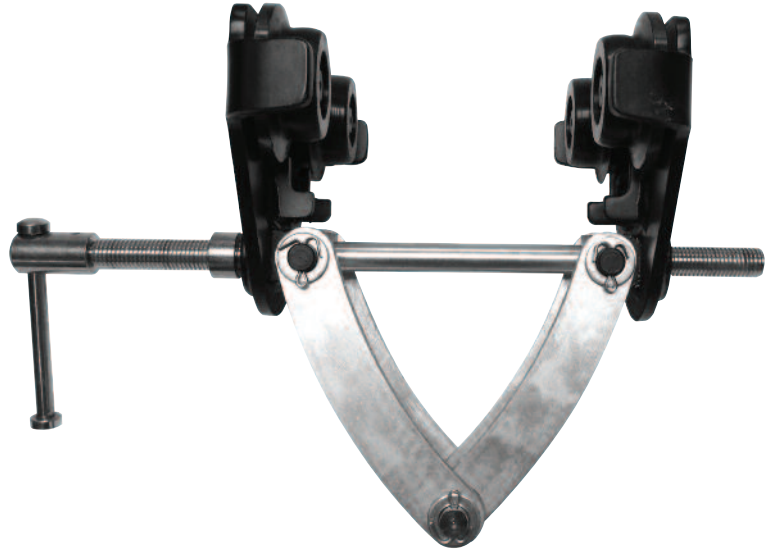

Product Code	Model	Capacity		I Beam Width (in.)	Minimum Radius Curve (in.)	Wheel Diameter (in.)
		Lbs.	Ton			
05500024	CTP/A 1T	2200	1	2-1/4 to 6	24	2.36
05500025	CTP/A 2T	4400	2	3 to 7-7/8	35	3.27
05500026	CTP/B 2T	4400	2	7-7/8 to 11-7/8	35	3.27
05500027	CTP/A 3T	6600	3	3 to 7-7/8	45	4.37
05500028	CTP/B 3T	6600	3	7-7/8 to 12-1/2	45	4.37

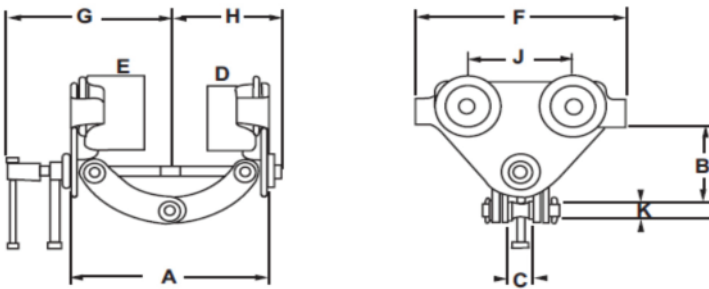

DIMENSION CHART

Model	Part Number	Working Load Limit	Jaw Capacity	Wheel Diameter	Minimum Curve Radius	A		B		C	D	E	F	G	H	J	K	Weight	
						Min	Max	Min	Max										
		Bl	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	lb.	
CTP/A 1T	005500024	2,200	2-3/8"- 5-7/8"	2.362	24"	3.74	7.283	3.228	4.291	1.026	2.598	2.874	6.299	6.020	4.134	2.952	0.787	5.5	
CTP/A 2T	005500025	4,400	3"-7-7/8"	3.267	35"	4.921	9.843	4.173	6.102	1.653	3.543	3.937	10.236	8.070	5.471	5.118	0.787	21.8	
CTP/B 2T	005500026	4,400	7-7/8"-11-7/8"	3.267	35"	4.921	9.843	5.365	7.519	1	.653	3.543	3.937	10.236	10.039	7.441	5.118	0.787	22.7
CTP/A 3T	005500027	6,600	3"-7-7/8"	4.37	45"	5.315	10.236	5.039	6.732	1.969	4.331	4.921	12.207	8.661	6.102	5.906	0.866	38.6	
CTP/B 3T	005500028	6,600	7-7/8"-11-7/8"	4.37	45"	5.315	10.236	5.905	8.346	1.969	4.331	4.921	12.207	11.02	8.464	5.906	0.866	43	