

MODEL ODD30 - 8010

Ultra Silent, High Performance, Attractive Design Grille
Description

Ventilating fan should be ceiling or wall mounted and capable of exhausting air quietly and efficiently. The ODD30-8010 fan is HVI and Energy Star certified. It comes with a capacitor start motor which is known for its high efficiency and long lasting reliability. It holds an cETLus evaluation and conforms to UL and cUL safety standards. It comes with a low speed feature that is designed to run continuously at 30CFM,24 hour a day,to meet the local building codes.

Housing

Made of rugged 26 GA galvanized steel
Detachable 4 inch polymeric collar which includes a light weight built in back draft damper.
Housing size: 9"x9"x5 3/4"

Motor/Blower

Totally enclosed brushless DC motor technology.

Power rating should be 120 volts and 60 Hz
Fan shall be ETL and cETL listed for tub/shower enclosure when used with a GFCI branch circuit.
Motor comes with a built in overload disconnect for safety and longer motor life.
operates at lower RPM s to give you quieter operation.

Grille

The grille is low profile that has elegance and still able to maintain its simplicity.
Made of a rugged polymeric resin that's known for its long life durability.
Comes with torsion spring clips that helps mount grille evenly.

Typical specification

Ceiling ventilator shall have corrosion resistance galvanized steel.
It shall be ducted to a roof vent or wall cap using 4 inch round pipe.
Ventilation Fan shall be of the ceiling or wall mount.

Includes a detachabe non-metallic collar with build-in back draft damer.

Power consumption shall be no greater than 9 watts.
The motor shall be totally enclosed with the brushless DC motor engineered to run continuously.



Options

- Flourescent light
- Humidistat




Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

CERTIFICATIONS



MODEL ODD30-8010

Model No.	ODD30-8010	
Static Pressure in inches w.g.	0.1	0.25
Air Volume (CFM)- High Speed	80	60
Air Volume (CFM)- Low Speed	30	23
Noise (sones)	1.0	N/A
Fan Watts	9W	N/A
Duct Diameter	4"	4"
Power Rating (V/Hz)	120/60	120/60

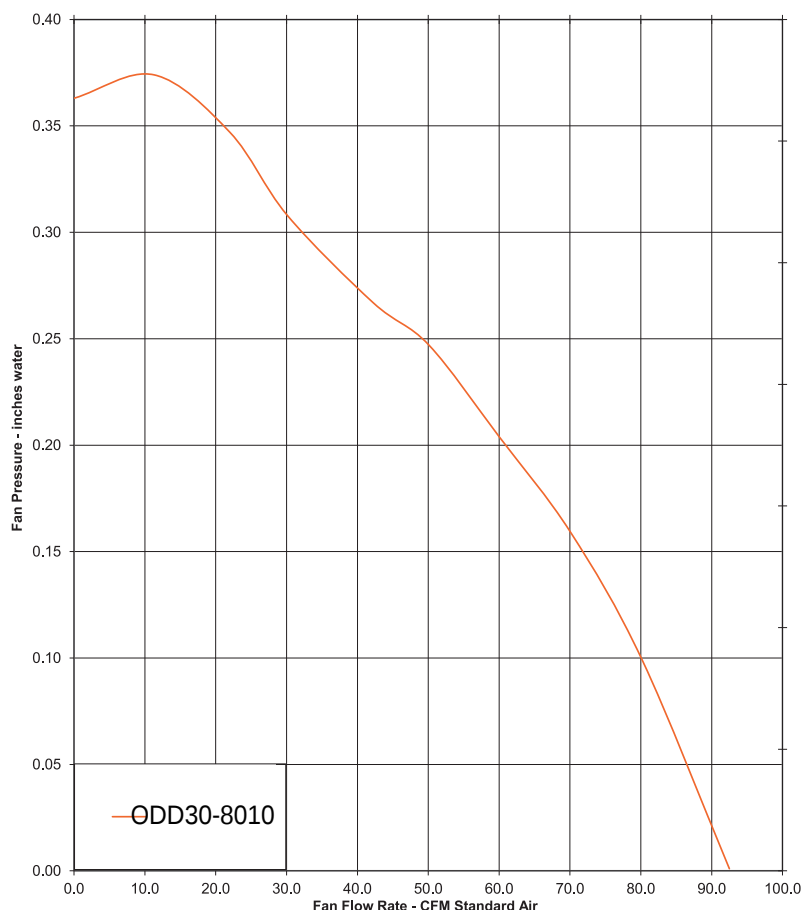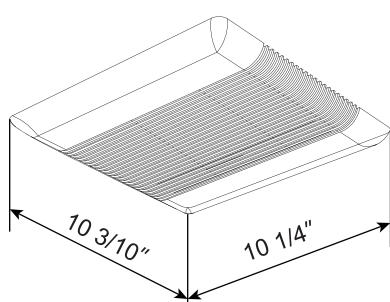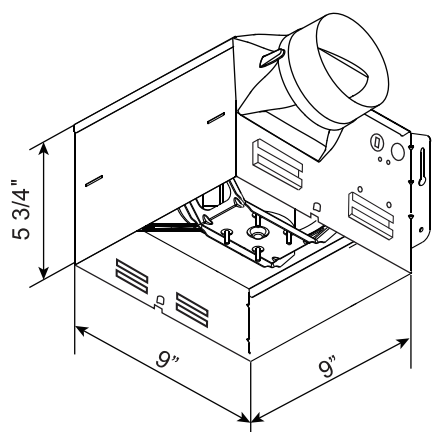

ORTECH INDUSTRIES INC.

13376 Comber Way

SURREY, BC V3W 8V4

CANADA

Phone: 1-888-543-6473

ORTECH
www.ortechindustries.com

CERTIFICATIONS

