

**9265C**  
NEW AGE



**9265C**

**FERRARI**

A HYVA GROUP COMPANY


# 9265C





**Ergonomic control station engineered for maximum operator comfort and ease of operation**

## Dynamic Load Diagram

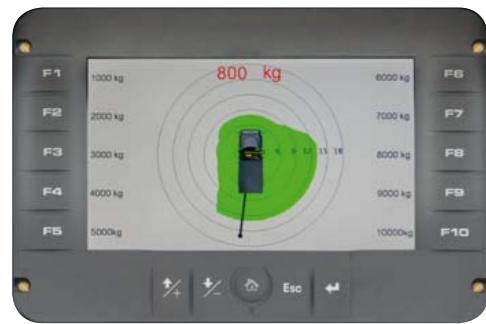

### Crane lifting capacity always under control in all stabilizer positions.

After the truck has been stabilized, the operator selects the load weight to be lifted. The display shows the permitted crane outreach based on the truck stability and load selected.

- Improved efficiency
- Easy to use
- Optimised safety

## Magic Touch



### Crane Automatic folding/unfolding.

This system allows the operator to unfold the crane to a working position and fold the crane from any position to transport position by pressing a single button on the radio transmitter or display.

- Easy to start and close
- Save time
- Increased productivity and safety

## High-tech development



- Structures optimised for strength, weight and speed

## Top Protection




- High value retention
- Top reliability

## Endless performance

### Continuous rotation and extreme flexibility

Endless slewing allows the crane to be operated without restrictions. The complete access to the working area, eliminates the need to reposition the truck, optimizing precision, productivity and safety.

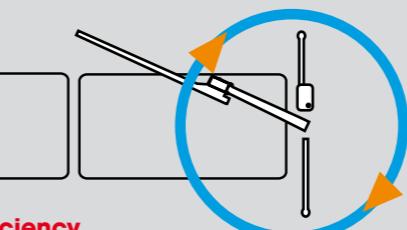


- Top efficiency
- Easy to use

## Functional Aesthetic




Forged double linkages on column and 2nd boom

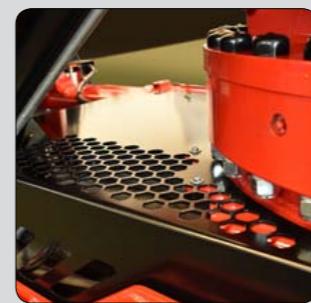

Hex Deck cover on base


## Crane control system

### F3XL

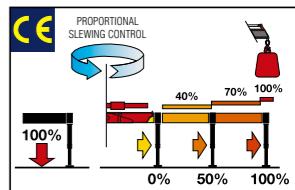

With a 3" TFT display and ergonomic keyboard, the crane operator can select optimum functional parameters. The system controls the stability with 2-step beam outreach monitoring and continuous slewing control.

### F4XL+TOP

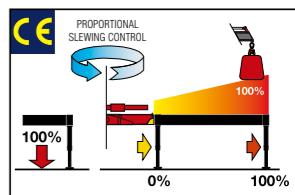

A 7" color display with integrated keyboard gives the operator a higher level of awareness of the crane operation and allows selection of the best parameters for effective use. The system detects the exact position of the beams and proportionally calculates the stability.

## Wide range Radio selection



Hetronic Not CE



Hetronic CE Basic




Scanreco

Powered by

Danfoss



Hetronic CE Graphic

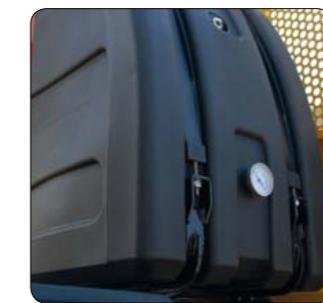


High volume oil tank made in sandwich-structured materials (PEX and PA6)



Robust column design and hoses cover

# 9265C Technical data

	Lifting Moment tm	Slewing Angle °	Working pressure bar	Oil tank capacity l	Max Oil flow l/min	Max lifting height m	Standard crane weight kg
A2	24,8	endless	345	130	80	10,40	2745
A3	24,3	endless	345	130	80	12,40	2885
A4	23,8	endless	345	130	80	14,50	3025
A5	23,3	endless	345	130	80	16,70	3150
A6	23,0	endless	345	130	80	19,00	3255
A7	22,6	endless	345	130	80	21,20	3375
A8	22,3	endless	345	130	80	23,50	3465
A4J3	12,9	endless	355	130	80	22,70	3685
A5J3	12,0	endless	355	130	80	24,20	3640
A6J2	12,6	endless	350	130	80	24,50	3530

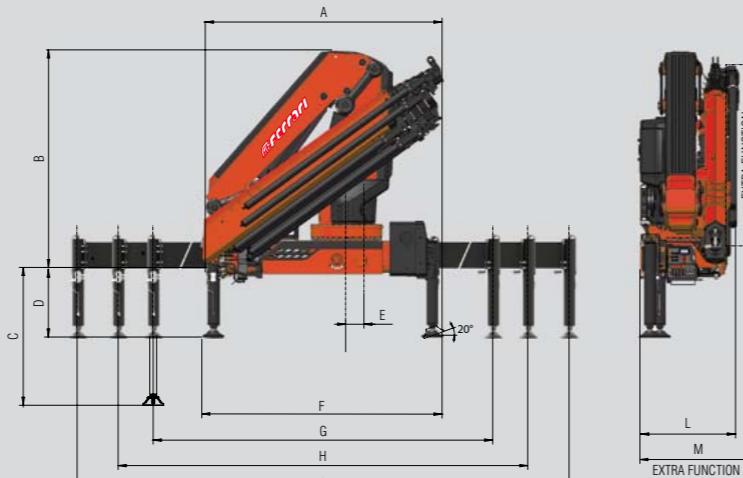

	A2	A3	A4	A5	A6	A7	A8	A4J3	A5J3	A6J2
A	2530	2530	2530	2530	2530	2530	2530	2575	2550	2540
B	2335	2335	2335	2335	2335	2335	2335	2700	2595	2580
C	1348	1348	1348	1348	1348	1348	1348	1348	1348	1348
D	666	666	666	666	666	666	666	666	666	666
E	250	250	250	250	250	250	250	250	250	250
F	2520	2520	2520	2520	2520	2520	2520	2520	2520	2520
G	4860	4860	4860	4860	4860	4860	4860	4860	4860	4860
H	5500	5500	5500	5500	5500	5500	5500	5500	5500	5500
I	7420	7420	7420	7420	7420	7420	7420	7420	7420	7420
L	980	980	980	980	980	1055	1055	1100	1100	1100
M	1100	1100	1100	1100	1100	1130	-	-	-	-



## Standard

- Multifunctional radio remote control
- Sauer Danfoss PVG32
- P-PB Proportional Power Boost
- Flanged valves
- Designed in accordance with EN12999
- Design class: HC1-HD5
- Oil tank
- Manually extendable stabilizers
- Fixed stabilizer cylinders
- Swivel stabilizer foot
- Centralized greasing system
- EOS Extension Quick System
- SDV Smooth Descent Valve
- Red Power
- F3XL Crane control system (CE)

A2	kg 5860	3995	3030
	m 4,23	6,13	8,03
A3	kg 5745	3880	2910
	m 4,23	6,13	8,03
	2310	1850	1505
	10,06	12,09	14,22
	1000		16,43
A4	kg 5315	3695	2750
	m 4,31	6,21	8,28
	2155	1780	1435
	10,14	12,17	14,30
	605		16,43
A5	kg 5315	3540	2610
	m 4,39	6,29	8,19
	2015	1645	1385
	10,22	12,25	14,38
	960		18,68
	535		20,96
A6	kg 5125	3390	2470
	m 4,48	6,38	8,28
	1885	1515	1260
	10,31	12,34	14,47
	765		16,60
	680		18,76
			20,96
A7	kg 4960	3265	2355
	m 4,56	6,46	8,36
	1775	1410	1150
	10,39	12,42	14,55
	855		16,68
	725		18,85
	630		21,05
			23,15
A8	kg 4805	3140	2250
	m 4,65	6,55	8,45
	1675	1315	1060
	10,48	12,51	14,64
	765		16,77
	680		18,93
	580		21,13
			23,23
A4J3	kg 855	745	660
	m 15,03	16,73	18,48
	595		20,23
	510		22,03
	435		23,96
A5J3	kg 695	625	570
	m 17,21	18,77	20,33
	525		21,89
	465		23,55
	415		25,32
A6J2	kg 650	600	560
	m 19,33	20,71	22,19

Recommended truck M.T.T. ton 18 - G.V.W. ton 18



**One model, many applications**



Waste handling



Construction



Fence posts, poles and landscaping



With winch

**ROTZLER**  
**TITAN**

**FERRARI**  
A HYVA GROUP COMPANY



Quality and environmental certified



**F.Ili FERRARI**  
Via Einstein, 8  
42028 Poviglio (RE) Italy  
Tel. +39 0522/486308  
Fax +39 0522/486330  
[info@flliferrari.it](mailto:info@flliferrari.it)  
[marketing@flliferrari.it](mailto:marketing@flliferrari.it)  
[www.flliferrari.com](http://www.flliferrari.com)

Dealer

Data, descriptions, and illustrations pertain only and uniquely to models sold at the time of printing of this brochure. After the date of printing, this information is purely indicative and not binding upon Flli Ferrari. Future modifications are solely at the discretion of Flli Ferrari and are always in compliance with applicable and pertinent safety standards. To obtain updated data, descriptions, and illustrations, contact the manufacturer or your reseller. Cranes manufactured and/or marketed by Flli Ferrari.

MKT 5800371 - DATE OF PRINTING: 31/08/2018