


POWERED by
HONDA™



BENEFITS

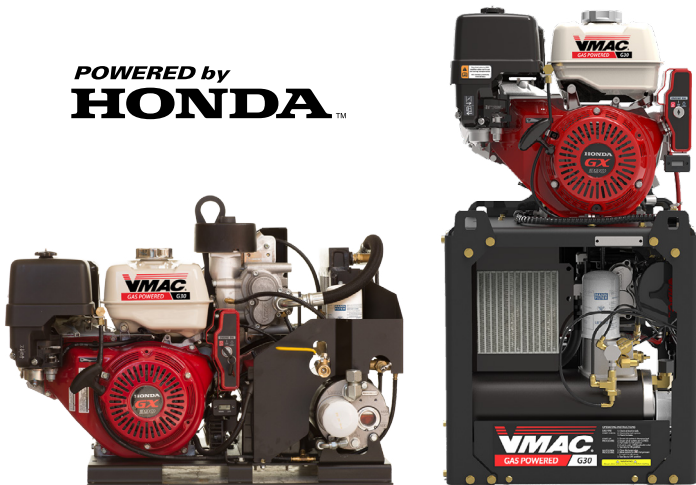

30 CFM, 100% Of The Time

VMAC G30 gas powered air compressors include a patented 30 CFM rotary screw air compressor designed to produce full air power, 100% of the time, so you don't need an air receiver tank. Get jobs done faster, without interruption.



60% Lighter

VMAC G30 gas powered air compressors are engineered and manufactured for mobile applications. Weighing only 205 lb, the VMAC G30 is up to 60% lighter than typical 22 – 30 CFM reciprocating gas engine driven air compressors with 30-gallon air receiver tank. Choosing a lightweight air compressor means you'll be able to add more tools and equipment to your truck, carry more materials, or take advantage of better fuel economy.



50% Smaller


VMAC air compressors feature the latest rotary screw technology integrated into a compact, turn-key package that is over 50% smaller than other competitive models. You can fit more tools, equipment and supplies on your truck, without hassle.



Industry Leading Reliability

VMAC G30 gas powered air compressors are proven to work in extreme cold climates across North America when ordered with an optional, factory-installed cold climate kit. Engines supplied by Honda come with an industry-leading 3-year warranty and VMAC rotary screw air compressors come with the industry's first Lifetime Warranty (Limited).

COMPONENTS

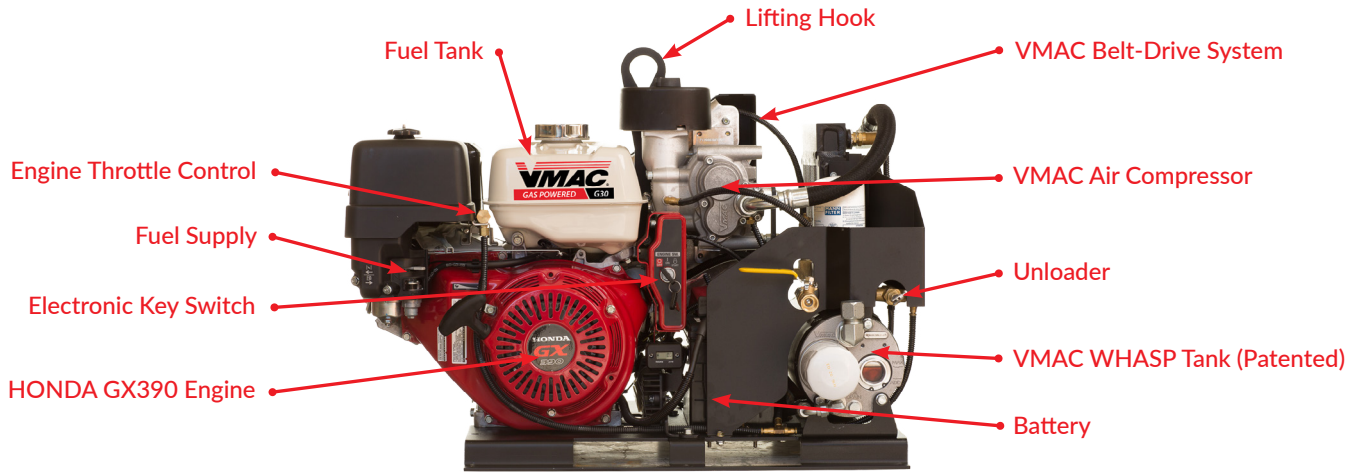

SPECIFICATIONS

	STANDARD	STACKED
Air Compressor Output	30 CFM @ 100 psi (150 psi max)	
Air Compressor Type	Belt-driven, 100% duty cycle, VMAC oil-injected rotary screw	
Engine	Honda GX390 air cooled 4-stroke OHV with electric start, CARB and EPA certified, Honda approved application	
Weight (wet)	Approx. 205 lb (93 kg)	Approx. 210 lb (95 kg)
Dimensions	<ul style="list-style-type: none"> » 33.5" (l) x 21.4" (w) x 23.9" (h); 85.1 cm (l) x 54.4 cm (w) x 60.7 cm (h) » Mounting Plate: 25.0" (l) x 19.125" (w) / 63.5 cm (l) x 48.6 cm (w) 	<ul style="list-style-type: none"> » 20" (l) x 18" (w) x 38" (h); 50.8 cm (l) x 45.7 cm (w) x 96.5 cm (h) » Mounting Plate: 16.75" (l) x 10.75" (w) / 42.5 cm (l) x 27.3 cm (w)
Throttle Control	2-speed throttle, responds to air demand	
Battery (included)	ACDelco 12V, 300 CCA, 360 CA	ACDelco 12V, 460 CCA, 575 CA
Control System	<ul style="list-style-type: none"> » Key switch, choke, hour meter » Automatically idles down/up with air demand » Unloader decreases engine load, lowers sound levels, reduces fuel use and engine wear 	
Safety Features	<ul style="list-style-type: none"> » Compressor thermal protection circuit » Automatic rapid blow-down valve on tank » 200 psi pressure relief valve » Low engine oil pressure shutoff 	
Decibels (dB) @ 20 feet (6.1 meters)	81 dB at high idle; 67 dB at low idle	
Fuel Tank Capacity	1.6-Gallons (6.1 L)	
Air Receiver Tank (recommended for high duty cycle applications in hot climates)	<ul style="list-style-type: none"> » 10-Gallon Air Receiver Tank w/ Mounting Feet » 6-Gallon Air Receiver Wing Tank » Dual 6-Gallon Air Receiver Tanks (Base Mounted) 	
Warranty	Two years on all major components; VMAC air ends are covered by VMAC's Lifetime Warranty (Limited); Honda engine is covered by Honda's 3-Year Warranty.	

