
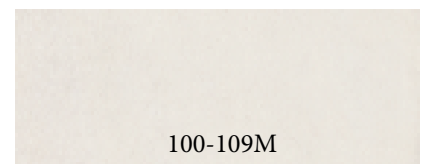
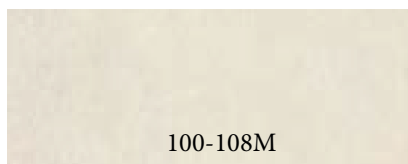
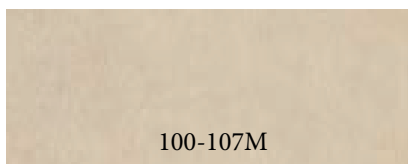
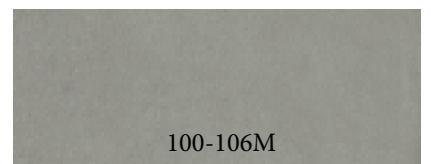
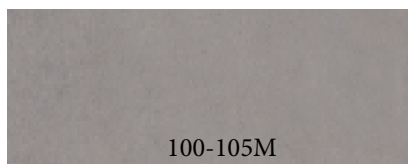
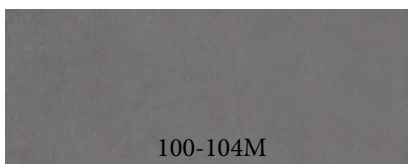
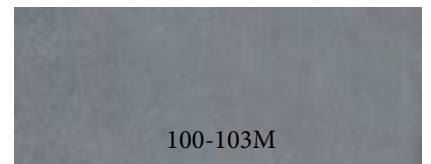
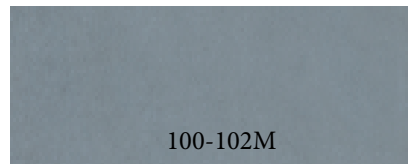



Allure

Allure is a porcelain tile with a modern urban aesthetic that has a broad transitional color pallet. It tells a color story of a world that is in constant evolution.

1. Available in 9 colors options
2. Sizes: 12x12, 12x24, 24x24, 24x48
3. Available in Matte finish only
4. Rectified
5. Has 30% recycled content (Post & Pre Consumer)

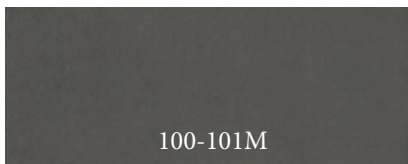

SIZES

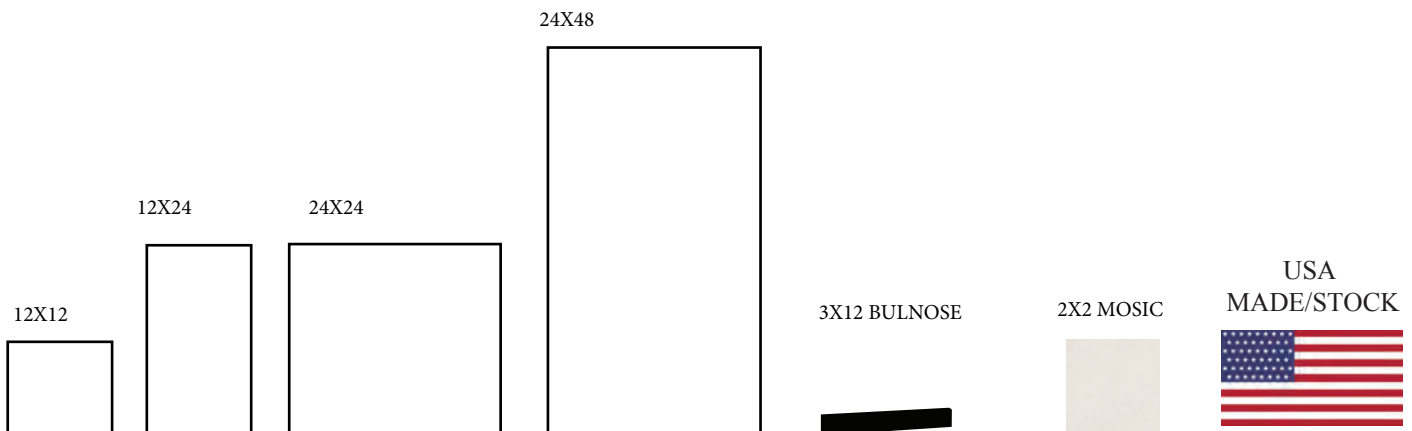



Floor and Wall Solutions

Order Samples at
331-702-2178
www.mondanicollection.com

1. FINISHES:

Matte and Glossy

Type: Porcelain Tile Application: Indoor

Thickness: 7.4

Recommended Grout Joint: 1/8" or greater

All sizes modular with 3/16" grout joint

2. TECHNICAL DATA

SPECS	TEST METHOD	INDUSTRY STANDARD	MILE [®] STONE VALUES
WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%
CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED
D.C.O.F. AcuTest [®]	ANSI A326.3	≥0.42% WET	≥0.42% WET
STAIN RESISTANCE	ASTM C1378	staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED
BREAKING STRENGTH	ASTM C648	≥250 lb/ft ²	10mm ≥400 lb/ft ²
RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible	RESISTANT
WARPAGE EDGE	ASTM C485	Warpage ± 0.4% or ± 0.07 in	≥± 0.4%
WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.4% or ± 0.07 in	≥± 0.4%
WEDGING	ASTM C502	± 0.25% or ± 0.03 in	≥± 0.25%
THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in


3. INSTALLATION

All installation work using Mondani Collection tiles will conform to the standards set forth in the latest version of ANSI A108/118 and/or the TCNA Handbook for Ceramic Tile installations.

Installation or setting materials:

Movement joints shall be provided throughout the tile and work will conform to ANSI Specification A108.01-3.7; A108.02 – 4.4. and TCNA Details EJ171.

Setting materials used will conform to the ANSI 118.4 standard or greater and be recommended by the selected manufacturer for the installation & setting materials for ceramic or porcelain tile based on the application requirements.

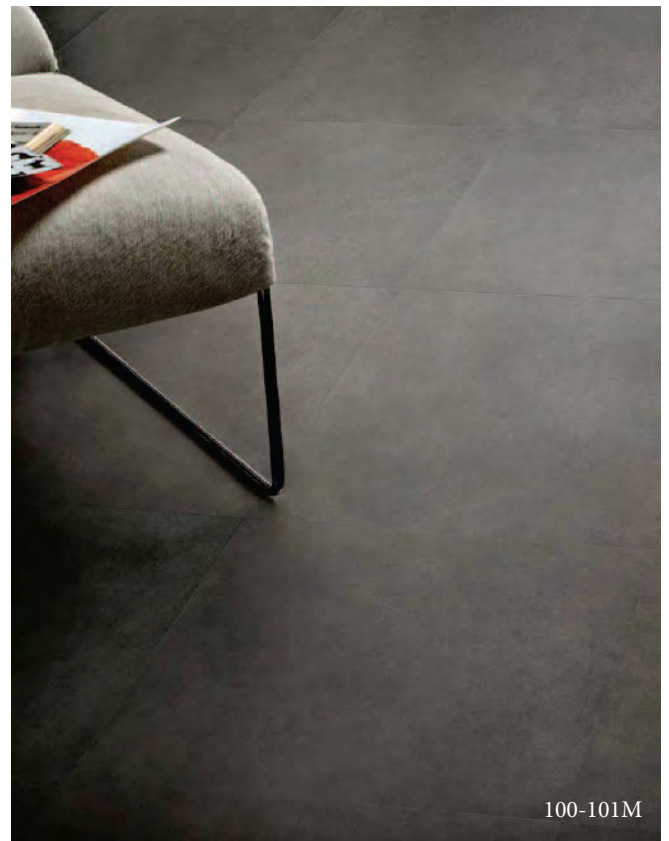

100-101M



MONDANI

COLLECTION

Floor and Wall Solutions


Order Samples at
331-702-2178
www.mondanicollection.com



100-102M



100-109M

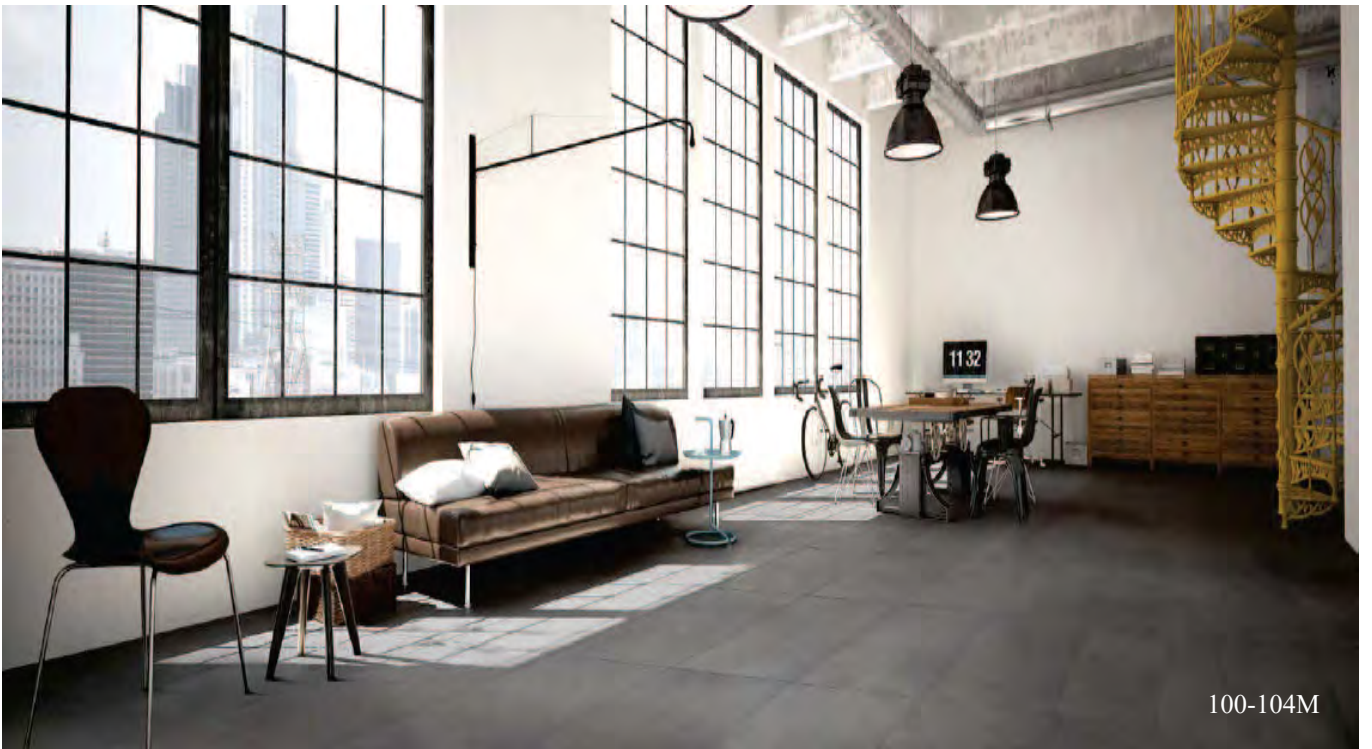

100-104M

USA
MADE/STOCK

