


Floor and Wall Solutions

Order Samples at 331-702-2178 www.mondanicollection.com

Contour

This tone on tone porcelain was inspired by the seashore, Contour is a timeless look.

- 1. 5 tranquil colors available in matte finish only
- 2. 12x24 size available in all colors
- 3. Mosaic and trim available in matte finish only
- 4. Rectified
- 5. 18x36 size available in colors 200-401M, 200-402M, 200-403M

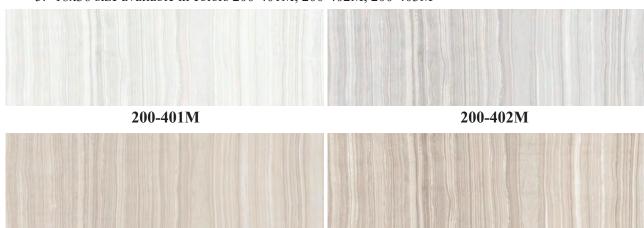

200-403M 200-404M



200-405M











3x24



Cove Base 6x12





Floor and Wall Solutions

Order Samples at 331-702-2178 www.mondanicollection.com

1. **FINISHES:**

Matte and Semi-Polished

Thickness: 8 mm

Recommended Grout Joint: 3/32" or greater

All sizes modular with 3/16" grout joint

Grout joints of 1/8" inch or less, may require floor flatness values in excess of the 1/4" in 10' (or 1/16" in 1.0') standard required by ANSI.

2. TECHNICAL DATA

	ASTM		
Physical Prop-	A31101	Industry Stan-	Mondani
erties	Test	dards	Results
	1000		
Water Absorption	C373	Impervious < 0.5%	≤ 0.1%
Bond Strength	C482	≥ 50 psi	≥ 200 psi
Breaking Strength	C648	≥ 250 lbf	≥ 400 lbf
	Scratch Test		
Hardness (Mohs)	(No regulated)		≥7
Frost Resistance		No sample must	
		show alterations to	
(Freeze/Thaw)	C1026	surface	Resistant
		No Requirement	
Chemical Resis-			
tance	C650	Range E - A	Unaffected
	DCOF Acutest		
Coefficient of Fric-			
tion (Dynamic)	នា (wet)	≥ 0.42*	≥ 0.42
	Visual Evalua-	No Requirement	
Aesthetic Classifi-	tion Shade &		
cation	Texture	Range V0 – V4	V2

^{*} All values given are for matte and semi-polished. No values are given for polished material. Mondani Collection. does not recommend polished surfaces in area subject to exposure from grease, oil or water.

For level interior spaces to be walked upon when wet (see ANSI A137.1 section 6.2.2.1.10 – Section 9.6 for test procedure).


3. INSTALLATION

All installation work using Mondani Collection tiles will conform to the standards set forth in the latest version of ANSI A108/118 and/or the TCNA Handbook for Ceramic Tile installations.

Installation or setting materials:

Movement joints shall be provided throughout the tile and work will conform to ANSI Specification A108.01-3.7; A108.02 – 4.4. and TCNA Details EJ171.

Setting materials used will conform to the ANSI 118.4 standard or greater and be recommended by the selected manufacturer for the installation & setting materials for ceramic or porcelain tile based on the application requirements.







Floor and Wall Solutions

Order Samples at 331-702-2178 www.mondanicollection.com











