
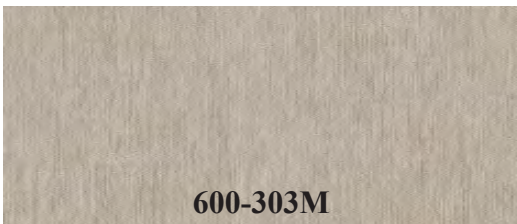


Pathways

Tone on tone directional lines create the contemporary look of Destination. The directional pattern can be installed in the same direction or in a random fashion.


1. 3 sizes 12x24,24x24,8x24
2. 5 colors
3. Matte finish
4. Mosaics and trim available
5. Rectified

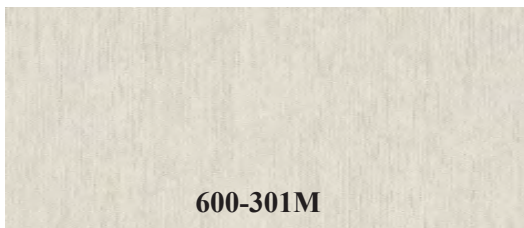


Sizes, Mosaics and Trims



24x24



12x24



8x24



2x2 mosaic
Sheet Size: 12x12



Bullnose
3x12

USA
MADE/STOCK





Floor and Wall Solutions

Order Samples at
331-702-2178

www.mondanicollection.com

1. FINISHES:

Matte

Thickness: 9 mm

Recommended Grout Joint: 3/32" or greater

All sizes modular with 3/16" grout joint

Grout joints of 1/8" inch or less, may require floor flatness values in excess of the 1/4" in 10' (or 1/16" in 1.0') standard required by ANSI.

2. TECHNICAL DATA

TECHNICAL FEATURES	TEST METHOD	REQUIRED VALUES	AVERAGE VALUES
WATER ABSORPTION	ASTM C373	<0.5%	CONFORMS
BREAKING STRENGTH	ASTM C848	> 250 LBF	426 LBF 10MM
SURFACE ABRASION RESISTANCE	ASTM C1027	BY MANUFACTURE	PEI6: COTTON YARN PEI6: ROPE, WOOL PEI4: QUILT
LINEAR THERMAL EXPANTION	ASTM C1027	NO PROVISION	
STAIN RESISTANCE	ASTM 1378	BY MANUFACTURE	A RESISTANT
CHEMICAL RESISTANCE	ASTM C850	BY MANUFACTURE	A RESISTANT
FROST RESISTANCE	ASTM C1026	BY MANUFACTURE	RESISTANCE
BOND STRENGTH	ASTM C482	50 PSI	CONFORMS
SLIP RESISTANCE	ANSI A326.3		DCOF>0.42
SHADE VARIATION	ANSI A137.1	BY MANUFACTURE	V2 SLIGHT VARIATION
FLAME SPREAD	ASTM E84		CLASS A
THERMAL CONDUCTIVITY	EN 12624		
RECOMMENDED MINIMUM JOINT	RECT(INDOOR)		2MM
THICKNESS	SIZES		
	24X24 RECT-60X60CM		10MM
	12X24 RECT-30X60CM		
	8X24 RECT 20X60 CM		

* All values given are for matte. No values are given for polished material. Mondani Collection. does not recommend polished surfaces in area subject to exposure from grease, oil or water.

For level interior spaces to be walked upon when wet (see ANSI A137.1 section 6.2.2.1.10 – Section 9.6 for test procedure).

3. INSTALLATION

All installation work using Mondani Collection tiles will conform to the standards set forth in the latest version of ANSI A108/118 and/or the TCNA Handbook for Ceramic Tile installations.

Installation or setting materials:

Movement joints shall be provided throughout the tile and work will conform to ANSI Specification A108.01-3.7; A108.02 – 4.4. and TCNA Details EJ171.

Setting materials used will conform to the ANSI 118.4 standard or greater and be recommended by the selected manufacturer for the installation & setting materials for ceramic or porcelain tile based on the application requirements.



600-305M



MONDANI

COLLECTION

Floor and Wall Solutions

Order Samples at
331-702-2178
www.mondanicollection.com



USA
MADE/STOCK

