



## Subway

With a wide range of colors, Subway is a great option to color your walls.

1. 11 sizes
2. 24 colors
3. Matte and Polished

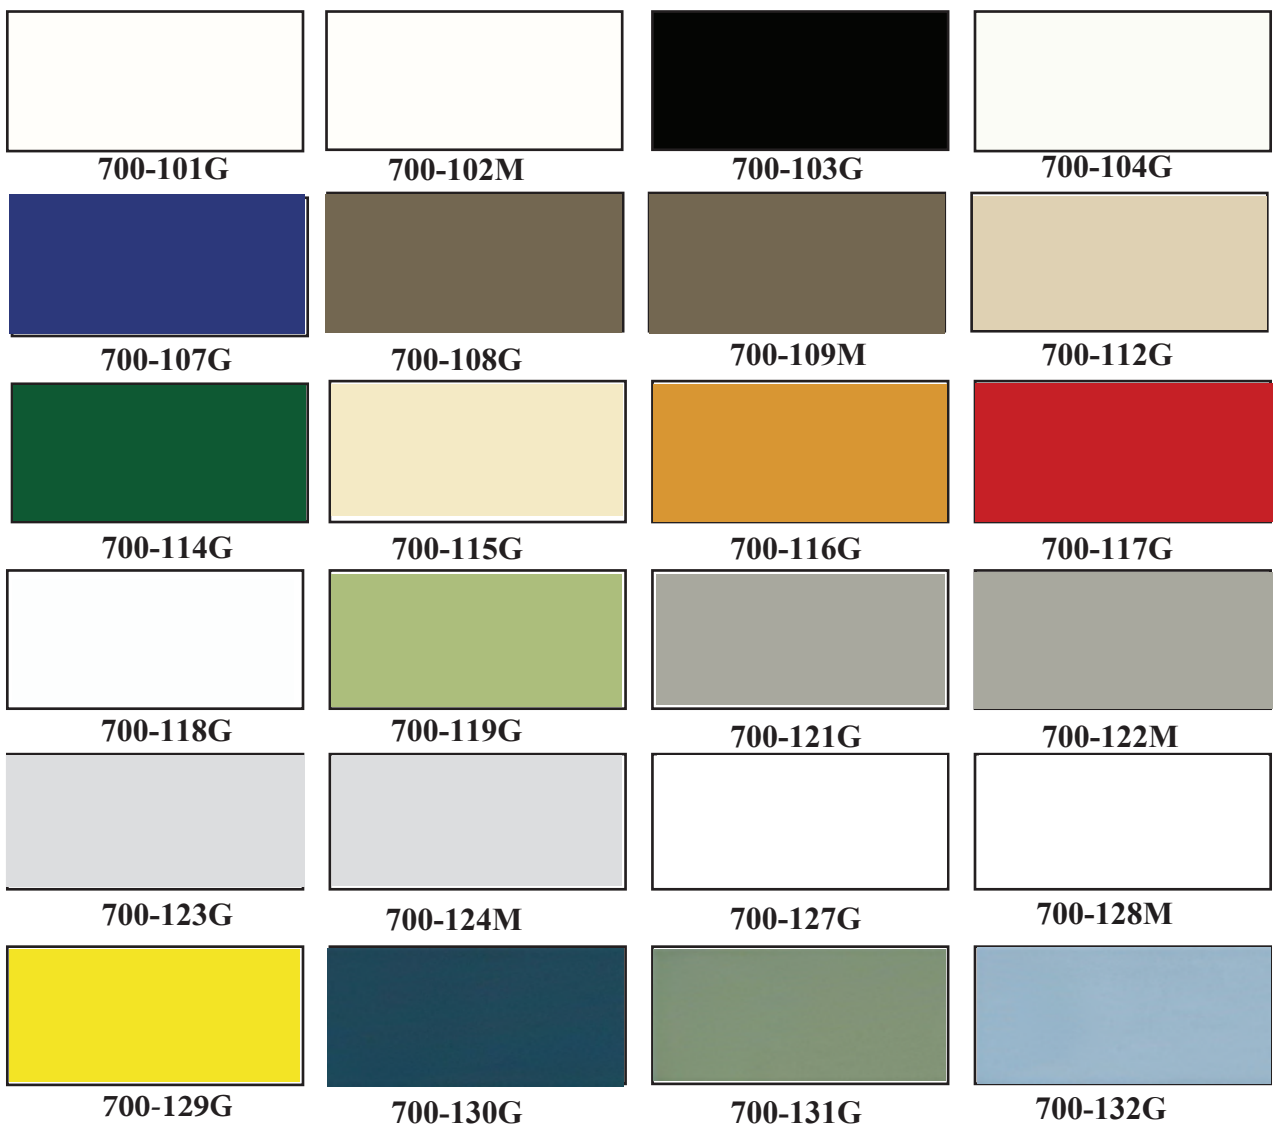

**Sizes**



10x28



8x24



13x24




9.5x13



3x12



6x18



4x12



6x6



3x6



4 -1/4x16



4 -1/4x10



4 -1/4x4 -1/4



2x8

## Technical Data

ITEM	2X8	4X4	4X10	4X12	4X16	3X6	6X6	6X18	3X12	9X13	13X24	8X24	10X28
700-101G	G	G	G		G	G	G	G					
700-102M		M	M		M	M	M						
700-103G		G				G	G						
700-104G		G				G	G						
700-107G		G				G	G						
700-108G		G				G	G						
700-109M		M				M	M						
700-112G		G				G	G						
700-114G		G				G							
700-115G		G				G							
700-116G		G				G							
700-117G		G	G			G	G						
700-118G			G			G							
700-119G		G				G							
700-121G		G	G		G	G	G	G					
700-122M		M	M		M	M	M						
700-123G	G	G	G	G	G	G	G	G	G				
700-124M		M	M	M	M	M	M		M				
700-127G	G	G	G	G	G	G,BV	G	G	G	G	G	G	G
700-128M	M	M	M	M	M	M,BV	M	M	M				
700-129G		G				G							
700-130G					G	G			G				
700-131G					G	G			G				
700-132G					G	G			G				

### Key

M: Matte G: Glossy BV: Beveled



## Floor and Wall Solutions

Order Samples at  
331-702-2178  
www.mondanicollection.com

### 1. FINISHES:

**Matte and Glossy**

**Type: Ceramic Wall Tile**

**Application: Indoor**

**Thickness: 7mm (2x8, 4x4, 6x6, 3x6 BV, 9.5x13) / 7.3 mm (3x12, 4x10, 4x10BV) / 8.0mm (4x16, 6x18,13x24)**

**Recycled Content: 28% \*Pre-Consumer. Recommended Grout Joint: 3/32" or greater. All sizes modular with 3/16" grout joint**

### 2. TECHNICAL DATA

Physical Properties	ASTM Test	ISO Test	Industry Standards	Mondani Results
Water Absorption	C373	ISO-10545/3	7.0% < wa <=20%	>10%
Breaking Strength	C648	ISO-10545/4	≥ 250 lbf	≥ 400 lbf
Scratch Hardness	MOH's Scale	EN-101	-	3
Chemical Resistance	C650	ISO-10545/13	Unaffected	Unaffected
Shade and Texture	CTDA "V"	-	-	V1
Warpage	C485	ISO-10545/2	0.0075	Pass
Wedging	C502	ISO-10545/2	1.0% Max	Pass

### 3. INSTALLATION

All installation work using Mondani Collection tiles will conform to the standards set forth in the latest version of ANSI A108/118 and/or the TCNA Handbook for Ceramic Tile installations.

Installation or setting materials:

Movement joints shall be provided throughout the tile and work will conform to ANSI Specification A108.01-3.7; A108.02 – 4.4. and TCNA Details EJ171.

Setting materials used will conform to the ANSI 118.4 standard or greater and be recommended by the selected manufacturer for the installation & setting materials for ceramic or porcelain tile based on the application requirements.



# MONDANI COLLECTION

## Floor and Wall Solutions

Order Samples at  
331-702-2178  
[www.mondanicollection.com](http://www.mondanicollection.com)



USA  
MADE/STOCK

