



Royal Home Furnishing

Fauxwood Blinds Installation Instructions

Thanks for Buying our Quality Product !





- Fits inside or outside window recess or to wall.
- Suitable for kitchens and bathrooms. Moisture resistant blinds
- This blinds comes with a child safety cleat and Automatic safety lock
- Includes fixtures; fittings and instructions.
- Wipe clean. Features tilt control
- Manufacturer's 1 year guarantee.

We would love to hear from you. Please do give product review it matters a lot to us.

Tools you will need

- 1.Measuring tape 2. Pencil 3.Level 4. Screwdriver 5.Power drill (1/4" hex driver and drill bit)


Check Hardware for proper installation

Blinds Width	End bracket 	Support bracket 	1.25" screw	Screw for hold down brakcet & cord cleat	Hold down bracket 	Valance Clip 
45-60CM	2	0	6	5	2	2
75-90CM	2	0	6	5	2	2
105-120CM	2	1	9	5	2	3
135-150CM	2	2	12	5	2	3
165-180CM	2	3	15	5	2	4
195-200CM	2	3	15	5	2	4
210-240CM	2	4	18	5	2	5


Note: You may find more hardware parts than you actually need. In that case, feel free to set them aside for future use.

Cord Cleat

- Install the cord cleat on the wall. Wrap the operating cords around the cord cleat for child safety. Always use the cord cleat to keep cords out of the reach of children. The cleat should be installed more than 64" (1.6m) from the floor.

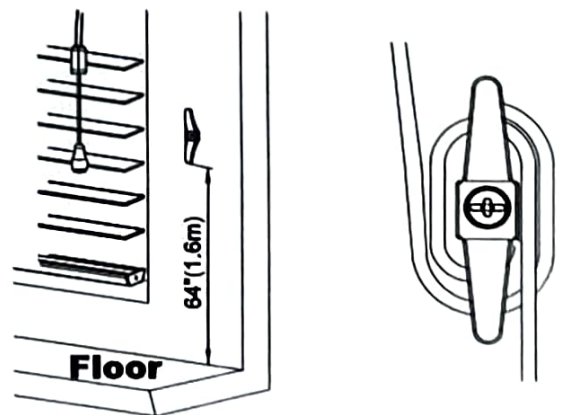

How to install blinds

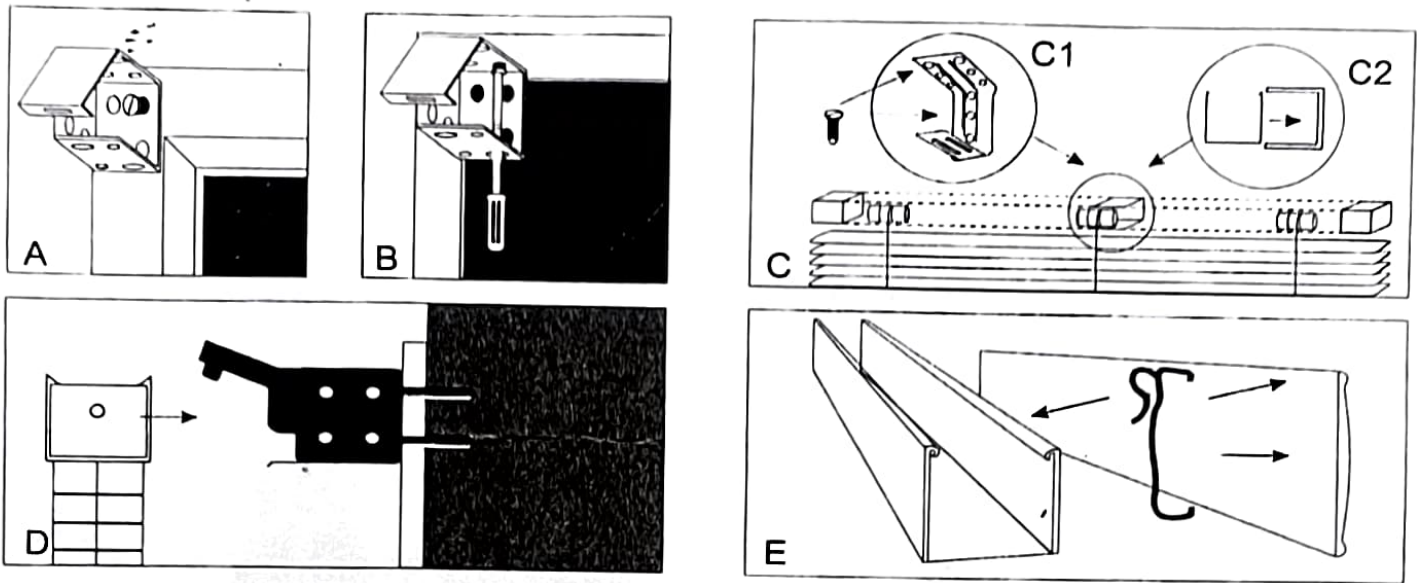

STEP 1. Attach the Brackets

Installing end brackets; Determine where to attach each bracket. For outside mounting (Diag A), position the bracket on the window frame or wall and attach with the proper fasteners. For inside mounting (Diag B), position top of bracket against inside surface of window frame and attach as shown. Each end bracket uses two screws mounted diagonally. Make sure end brackets are level. Installing support brackets (where supplied): (Diag C) Center the support bracket between the two end brackets. Keep the top and back of each support bracket level and aligned with tops and backs of the end brackets. If more than one support bracket is used, space the support brackets evenly across the width of the headrail (Diag C). Insert screws in the top for an inside mount; insert screws in the back for an outside mount (Diag C).

STEP 2. Install the Headrail

Slide the headrail into the end brackets and center support (Diag C). Then close end bracket covers until they click into place (Diag D).


STEP 3. Install Valance

Your Blinds includes a valance. Position one valance clip at each end of the headrail, and evenly space any additional clips across the width of the headrail. (Diag E).

How to Reassemble Cord Release Device

- Our blinds comes equipped with a cord release device that prevents child strangulation. Should the cord release device come apart, please refer to below steps:

1. Open cord release device entirely.
2. Align all operating cords and slide them into the slot of cord release device.
3. Snap cord release device together to close.

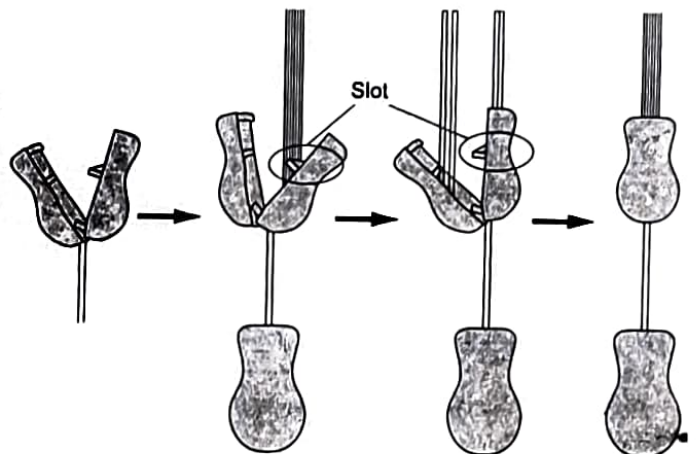

Operating Your Blinds

- To lower the blinds, pull the cord down and towards the center of the shade to unlock the cord. Then, slowly release the cord until the shade reaches the desired location. Move the cord past the outer edge of the shade and let go to lock the cord.
- To raise the blinds, pull the cord straight down until the shade reaches the desired location. Move the cord past the outer edge of the shade and let go to lock the cord.
- To clean the blinds, use a soft cloth slightly moistened with lukewarm water to wipe down the slats.
- Child Safety, please ensure a general safety warning tag is fitted on the product.