

# ALL SURFACE PAINT

## REVIVES AND PROTECTS



### PERFORMANCE ADVANTAGES

- ▶ UV, Weather & Scratch Resistant
- ▶ Tough & Durable Finish
- ▶ Excellent Adhesion
- ▶ Multi Surface Use
- ▶ Rapid Drying



### HOW TO VIDEO

View our handy 'how-to' video to understand how to get the best results from our products.



**Quick  
Drying  
Time**



**Interior  
& Exterior  
Use**



**Easy  
To  
Apply**



**CLICK TO VIEW VIDEO**

### DIRECTIONS



#### Step One

Prepare the area to be treated, ensuring freedom from contaminants and allow to dry.



#### Step Two

Ensure any surfaces are covered and protected prior to application.



#### Step Three

Apply sparingly from 20 - 25cm. Apply 2 - 3 light coats for even coverage, leaving 10 - 15 mins between coats.



#### Step Four

Allow to fully harden for at least 24 hours after application.

# TECHNICAL DATA SHEET

## ALL SURFACE PAINT

### USES

- ▶ A multi-purpose use spray paint designed for application to a multitude of different surfaces.
- ▶ Ideal for use on Brick, Metal, Wood, MDF and Plastic.
- ▶ **DO NOT USE** on surfaces treated with primers of unknown composition, without first ascertaining suitability of use.

### COLOUR RANGE

ARCTIC BLUE	LIGHT RED	BLACK
GLACIER WHITE	ANTHRACITE	ICE GREY
MIDNIGHT BLACK	SOFT FUR	

### PACK SIZE

- ▶ 400ml.

### SPREADING RATE

- ▶ Up to 2 square metres/400ml can depending on the nature and porosity of the surface.
- ▶ 2 coats required.

### DRYING TIME

- ▶ Allow 10-15 minutes between each coat.
- ▶ Minimum 24 hours for full paint hardness.

### SHELF LIFE

- ▶ Keeps for up to 2 years when stored correctly.

### CLEANING

Clean all equipment with white spirit immediately after use.

### PREPARATION AND APPLICATION

- ▶ Prepare the primed area to be treated, ensuring freedom from dust, grime, greases, oils etc.
- ▶ Use Polar Pre Paint Cleaner to ensure the surface is thoroughly cleaned and allow to dry..
- ▶ If necessary, the surface may be flattened by abrading the surface lightly, using 1200-grade wet and dry abrasive paper, and solvent treated as described above to remove any dust.
- ▶ Shake the can thoroughly for at least two minutes. Repeat shaking at regular intervals during use.
- ▶ Apply sparingly from a distance of 20 – 25cm. Apply typically 2 to 3 light coats as necessary to achieve total and even coverage, leaving 10 - 15 minutes between each application.
- ▶ Allow to fully harden for at least 24 hours after application.

- ▶ On completion of use, invert can and depress actuator for a few seconds to prevent nozzle blockage.

### PRECAUTIONS

- ▶ **Flammable** keep away from sources of ignition.
- ▶ Ensure good ventilation during application - use outdoors or in a well-ventilated area.
- ▶ Wear gloves, goggles and suitable protective clothing.
- ▶ In case of contact with eyes rinse immediately with plenty of water and seek medical advice. Remove contact lenses if present and easy to do.
- ▶ Remove splashes from the skin with a recognised hand cleaner or plenty of soap and water.
- ▶ Keep out of reach of children.
- ▶ May cause drowsiness or dizziness.
- ▶ Avoid breathing vapour/spray.

# TECHNICAL DATA SHEET

## ALL SURFACE PAINT



- ▶ Dispose of contents/container in accordance with local regulations.
- ▶ Repeated exposure may cause skin dryness or cracking. Contains acetone.
- ▶ **CAUTION:** Pressurised container: May burst if heated. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F. Do not pierce or burn, even after use. Do not spray on an open flame or other ignition source. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.
- ▶ Use only as directed.

### SAFETY

Good working practice should be followed.

The specification and coverage rates are given in good faith and are based on our experience and knowledge but without liability.

*As Polar Specialist Coatings Limited has no direct control over the methods employed by the user in applying its products, any warranty either written or implied is given in good faith and can only cover the material itself.*

If in doubt regarding any of the above points, please contact our technical services department for advice.

**A Material Safety Data Sheet is available on request.**

It is the users responsibility to ensure that this data sheet is current prior to using the product.




Road 3, Winsford Industrial Estate, Winsford, Cheshire. CW7 3PD  
info@polarcoatings.co.uk | 0161 850 0379

## Innovate Pioneers for Specialist Coatings

Polar provides you with the expertise and quality to transform & renovate all your DIY projects.

Formerly the creators of Johnstone's paints with over 130 years manufacturing experience...

We deliver reliable, high-performance paints that revive, protect & maintain your home.

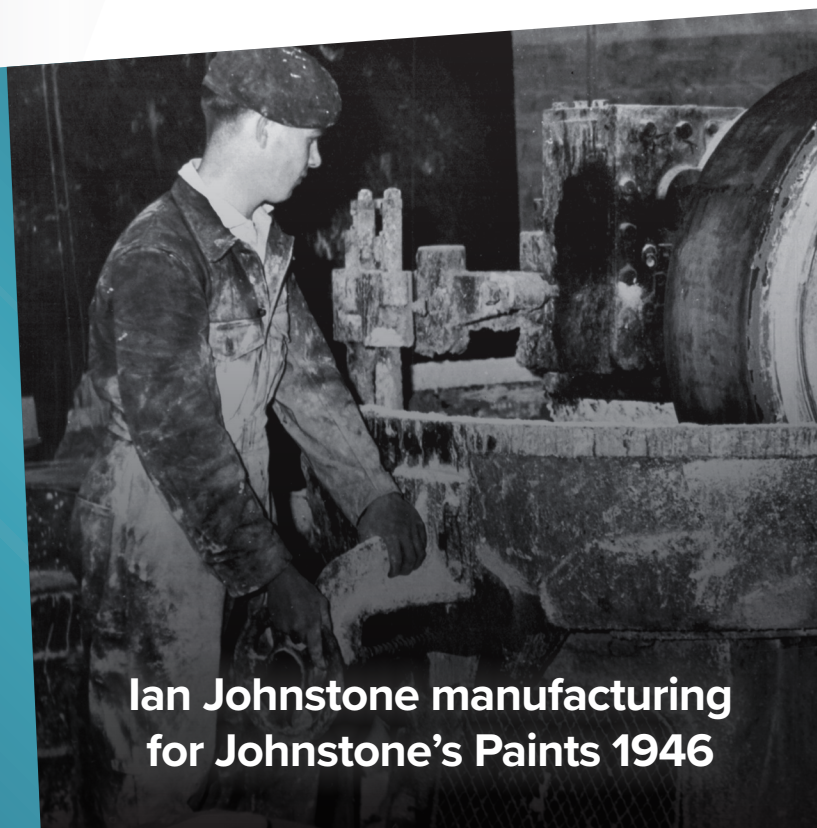

**Ian Johnstone manufacturing  
for Johnstone's Paints 1946**