

ALL SURFACE PRIMER

PRIMES AND PREPARES

POLAR
RENOVATE ▴ REVIVE ▴ PROTECT

PERFORMANCE ADVANTAGES

- ▶ Excellent Adhesion
- ▶ Tough & Durable Finish
- ▶ Multi Surface Use
- ▶ Rapid Drying
- ▶ Enhanced Covering Power



HOW TO VIDEO

View our handy 'how-to' video to understand how to get the best results from our products.



**Extremely
Durable
Finish**



**One
Coat
Application**



**Quick
Drying
Time**



DIRECTIONS



Step One

Prepare surfaces by lightly sanding. Ensure they are clean, dry and free from oil and grease.



Step Two

Mask off or cover surfaces not to be sprayed. Shake well before use.



Step Three

Spray from 25 - 30 cm and apply a number of thin coats allowing ten minutes between coats.



Step Four

Leave for 24 hours to allow paint to harden. After use invert can and spray for a few seconds to clear nozzle.

RENOVATE ▴ REVIVE ▴ PROTECT

TECHNICAL DATA SHEET

ALL SURFACE PRIMER

USES

A fast drying acrylic paint. It is suitable for most applications in the automotive and general industrial areas, and is compatible with most other paint systems.

- ▶ For interior and exterior use on multiple objects and finishes such as; wood, metal, plaster, masonry, ceramic and wicker.
- ▶ Use on all types on non-porous surfaces, when used in conjunction with an appropriate primer.
- ▶ For interior and exterior use.
- ▶ Apply to existing paintwork or bare surfaces.

Do not use on surfaces previously treated with alkyd paints, without first ascertaining suitability.

COLOUR RANGE

WHITE

PACK SIZE

- ▶ 400ml.

SPREADING RATE

- ▶ Up to 2 square metres/400ml can depending on the nature and porosity of the surface.
- ▶ 2 coats required.

DRYING TIME

- ▶ Recoatable after 10 minutes.
- ▶ Fully dry in 24 hours. .

SHELF LIFE

- ▶ Keeps for up to 2 years when stored correctly.

CLEANING

- ▶ Clean all equipment with white spirit immediately after use.

PREPARATION AND APPLICATION

- ▶ Shake well before use.
- ▶ Prepare surfaces by lightly sanding with wet or dry paper.
- ▶ Rust, other surface contamination, and loosely adhering matter should be removed using an appropriate grade of wet and dry abrasive cloth.
- ▶ Ensure that surfaces are clean, dry and free from oil and grease.
- ▶ Use Polar Pre Paint Cleaner to ensure surfaces are correctly cleaned prior to application.
- ▶ If in doubt about the composition of the substrate, undertake a small test application on an inconspicuous area prior to use to ensure suitability.
- ▶ Mask off surfaces not to be sprayed.
- ▶ Spray from a distance of 25 to 30 cm.

- ▶ Apply 2 to 3 coats as necessary to achieve total and even coverage.
- ▶ Allow at least 15 minutes between each application.
- ▶ Leave for 24 hours to allow the paint to harden.
- ▶ After use invert can and spray for a few seconds to clear nozzle.

PRECAUTIONS

- ▶ **Flammable!** Keep away from sources of ignition.
- ▶ Ensure good ventilation during application - use outdoors or in a well-ventilated area.
- ▶ Wear gloves, goggles and suitable protective clothing.
- ▶ In case of contact with eyes rinse immediately with plenty of water and seek medical advice. Remove contact lenses if present and easy to do.

TECHNICAL DATA SHEET

ALL SURFACE PRIMER

- ▶ Remove splashes from the skin with a recognised hand cleaner or plenty of soap and water.
- ▶ Keep out of reach of children.
- ▶ May cause drowsiness or dizziness.
- ▶ Avoid breathing vapour/spray.
- ▶ Dispose of contents/container in accordance with local regulations.
- ▶ Repeated exposure may cause skin dryness or cracking. Contains acetone.
- ▶ **CAUTION:** Pressurised container: May burst if heated. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F. Do not pierce or burn, even after use. Do not spray on an open flame or other ignition source. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.
- ▶ Use only as directed.

TECHNICAL DATA SHEET

ALL SURFACE PRIMER



SAFETY

Good working practice should be followed.

The specification and coverage rates are given in good faith and are based on our experience and knowledge but without liability.

As Polar Specialist Coatings Limited has no direct control over the methods employed by the user in applying its products, any warranty either written or implied is given in good faith and can only cover the material itself.

If in doubt regarding any of the above points, please contact our technical services department for advice.

A Material Safety Data Sheet is available on request.

It is the users responsibility to ensure that this data sheet is current prior to using the product.

VIEW OUR FULL RANGE OF PRODUCTS

www.polarcoatings.co.uk




Road 3, Winsford Industrial Estate, Winsford, Cheshire. CW7 3PD
info@polarcoatings.co.uk | 0161 850 0379

Innovate Pioneers for Specialist Coatings

Polar provides you with the expertise and quality to transform & renovate all your DIY projects.

Formerly the creators of Johnstone's paints with over 130 years manufacturing experience...

We deliver reliable, high-performance paints that revive, protect & maintain your home.

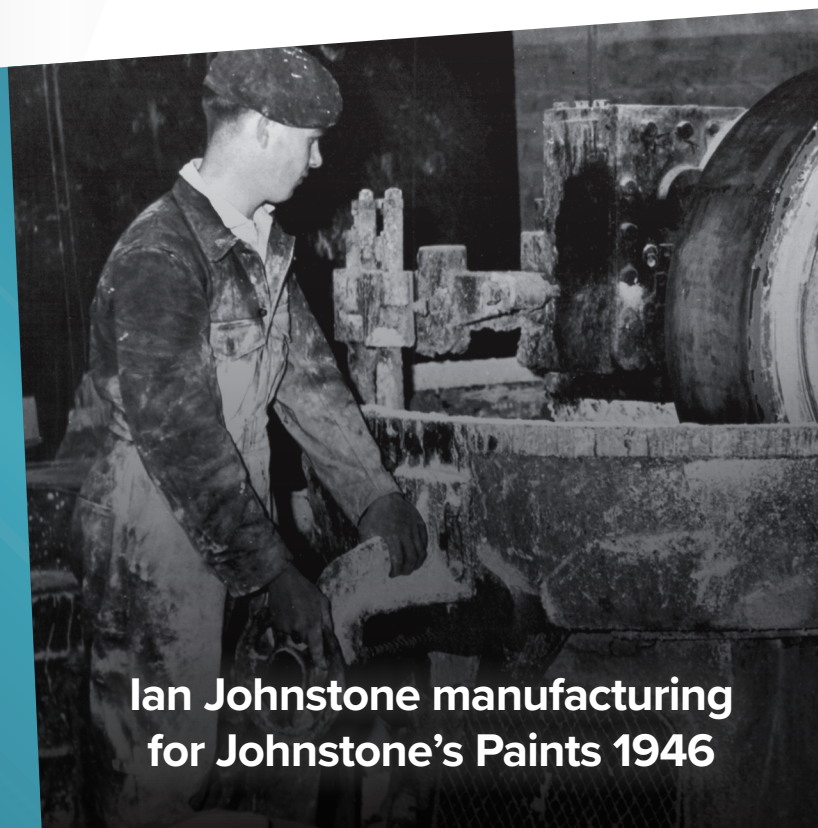

**Ian Johnstone manufacturing
for Johnstone's Paints 1946**