

# ANTI-MOULD PAINT

## MOULD INHIBITING COATING



### PERFORMANCE ADVANTAGES

- ▶ Prevents Mould Growth
- ▶ Lasting Protection
- ▶ High Scrub Resistance
- ▶ Primer & Sealer
- ▶ Multi Surface Use



### HOW TO VIDEO

View our handy 'how-to' video to understand how to get the best results from our products.



**Quick  
Drying  
Time**



**Anti  
Mould  
Formula**



**Hard  
Wearing &  
Washable**



### DIRECTIONS



#### Step One

Ensure surfaces are clean, dry and free from loose and flaking material.



#### Step Two

Treat any mould or lichen with Polar Mould Remover before removing with a scraper or stiff brush.



#### Step Three

Stir well before use. Apply an even coat either by brush or roller.



#### Step Four

Apply a second coat and allow to dry. Clean all equipment thoroughly after use.

# TECHNICAL DATA SHEET

## ANTI-MOULD PAINT

### USES

In areas where conditions are prone to mould growth, eg. food preparation areas, bathrooms and cellars.

- ▶ Can be applied using a brush or roller.
- ▶ For interior use only.
- ▶ Note: This does not remove the need to repair any structural faults which allow water to penetrate into the fabric of the wall.

### COLOUR RANGE

WHITE

### PACK SIZE

- ▶ 500ml, 1 Litre, 2.5 Litre, 5 Litre.

### SPREADING RATE

- ▶ Up to 11 square meters per litre depending on the moisture and porosity of the surface being painted.
- ▶ Apply 2 coats.

**IT IS IMPORTANT TO ENSURE THAT THIS TOTAL FILM THICKNESS IS ACHIEVED - DO NOT OVERSPREAD.**

### PREPARATION AND APPLICATION

- ▶ All surfaces to be painted should be clean, dry and free from loose and flaking material.
- ▶ Rub down previously gloss painted surfaces with fine waterproof abrasive paper and rinse thoroughly.
- ▶ Avoid the inhalation of dust.
- ▶ Wear a suitable face mask if dry sanding.
- ▶ Treat any mould or lichen with Britannia's Fungicidal Wash Solution before removing with a scraper or stiff brush, then treat again.
- ▶ **STIR WELL BEFORE USE.**
- ▶ Ensure maximum ventilation during application and drying.
- ▶ Do not breathe spray, wear respiratory protection.

### DRYING TIME

- ▶ Touch dry in 2-3 hours.
- ▶ Recoatable after 4 hours.
- ▶ Curing of the coating can be extended at lower temperatures.

### SHELF LIFE

- ▶ Up to 12 months if stored correctly in an unopened container.
- ▶ Store within the temperature range 5°C – 25°C
- ▶ **PROTECT FROM FROST**

### CLEANING

- ▶ Remove as much product as possible from application equipment before cleaning.
- ▶ Replace lid firmly.
- ▶ Clean equipment immediately after use with warm soapy water and rinse thoroughly.container.

- ▶ Seal absorbent surface with a first coat thinned down with up to 10% clean water.

### PRECAUTIONS

- ▶ Keep out of reach of children.
- ▶ In case of contact with eyes wash immediately with plenty of water.
- ▶ Remove splashes from skin with soap and water or a recognised hand cleaner.
- ▶ Protect from freezing.
- ▶ Do not apply when the air or substrate temperatures are likely to fall below 10°C.
- ▶ Do not use near fishponds.

# TECHNICAL DATA SHEET

## ANTI-MOULD PAINT



### SAFETY

Good working practice should be followed and safety/walking boards should be utilised where required.

The specification and coverage rates are given in good faith and are based on our experience and knowledge but without liability.

*As Polar Specialist Coatings Limited has no direct control over the methods employed by the user in applying its products, any warranty either written or implied is given in good faith and can only cover the material itself.*

If in doubt regarding any of the above points, please contact our technical services department for advice.

**A Material Safety Data Sheet is available on request.**

It is the users responsibility to ensure that this data sheet is current prior to using the product.

VIEW OUR FULL RANGE OF PRODUCTS  
[www.polarcoatings.co.uk](http://www.polarcoatings.co.uk)




Road 3, Winsford Industrial Estate, Winsford, Cheshire. CW7 3PD  
info@polarcoatings.co.uk | 0161 850 0379

## Innovate Pioneers for Specialist Coatings

Polar provides you with the expertise and quality to transform & renovate all your DIY projects.

Formerly the creators of Johnstone's paints with over 130 years manufacturing experience...

We deliver reliable, high-performance paints that revive, protect & maintain your home.

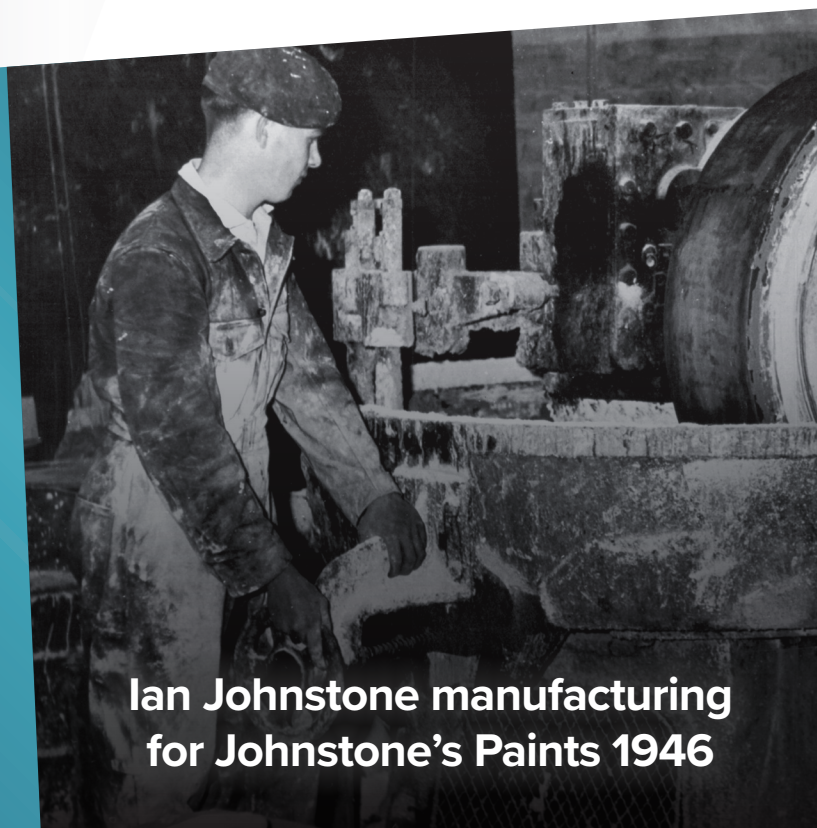

**Ian Johnstone manufacturing  
for Johnstone's Paints 1946**