

ANTI-SLIP FLOOR & GARAGE PAINT

COATS AND PROTECTS

POLAR
RENOVATE ▲ REVIVE ▲ PROTECT

PERFORMANCE ADVANTAGES

- ▶ Durable Anti-Slip Finish
- ▶ Revives Concrete Floors
- ▶ Heavy Duty Polyurathane
- ▶ Industrial Strength
- ▶ Chemical & Water Resistant



HOW TO VIDEO

View our handy 'how-to' video to understand how to get the best results from our products.



**Excellent
Chemical
Resistance**



**Easy
To
Use**



**Extremely
Durable
Finish**



DIRECTIONS



Step One

The floor area must be clean, dry and free from all contaminants.



Step Two

Stir Anti-Slip Floor & Garage Paint well before use and thin first coat 10% with white spirit.



Step Three

Apply a second coat after 16-24 hours.



Step Four

The surface will be fully cured within 4-7 days.

RENOVATE ▲ REVIVE ▲ PROTECT

TECHNICAL DATA SHEET

ANTI-SLIP FLOOR & GARAGE PAINT

USES

- ▶ Ready for use on concrete and stone floors in the factory, warehouse, garage, corridor and utility room environments.
- ▶ Can be applied with either a brush or a solvent resistant roller.
- ▶ Not recommended for use on Bitumen or Asphalt.

COLOUR RANGE

LIGHT GREY	BLACK	WHITE
SEA BLUE	YELLOW	

PACK SIZE

- ▶ 5 Litre.

SPREADING RATE

- ▶ 1 litre covers up to 12m², dependent on substrate.

DRYING TIME

- ▶ Touch dry in 2-4 hours, dependent on ambient temperature, minimum over coating time of 16-24 hours.

NOTE: Low temperatures can significantly extend the drying time.

SHELF LIFE

- ▶ Up to 2 years if stored correctly in an unopened container.

CLEANING

- ▶ Clean all equipment with white spirit immediately after use.

PREPARATION AND APPLICATION

- ▶ All surfaces to be painted should be clean and dry, free from dust, dirt, grease, oil, laitance and loose or flaking materials.
- ▶ New concrete should be allowed to mature for a minimum of 6 months before paint can be applied.
- ▶ Chemically or mechanically hardened floors may need abrasion, prior to application.
- ▶ If in doubt always test a small area prior to use.
- ▶ Stir well before use.
- ▶ Polar Floor & Garage Paint can be applied with either a brush or a solvent resistant roller.
- ▶ Coverage will vary dependent on the nature and porosity of the substrate and the application method.
- ▶ Priming is not normally required, however the first coat on concrete or porous surfaces, should first be thinned up to 10% with white spirit and allowed to dry.
- ▶ Applying an even coat, 2 coats are normally

required, allowing a minimum over coating time of 16-24 hours.

Note: Low temperatures can significantly extend the drying time.

PRECAUTIONS

- ▶ **Flammable!** Keep away from sources of ignition.
- ▶ Ensure good ventilation during application.
- ▶ Wear gloves, goggles and suitable protective clothing.
- ▶ In case of contact with eyes rinse immediately with plenty of water and seek medical advice.
- ▶ Remove splashes from the skin with a recognised hand cleaner or plenty of soap and water.
- ▶ Keep out of reach of children.
- ▶ Do not use near fishponds.
- ▶ Toxic to aquatic organisms. May cause long term adverse effects in the aquatic environments.
- ▶ Do not empty into drains.

TECHNICAL DATA SHEET

ANTI-SLIP FLOOR & GARAGE PAINT



SAFETY

Good working practice should be followed.

The specification and coverage rates are given in good faith and are based on our experience and knowledge but without liability.

As Polar Specialist Coatings Limited has no direct control over the methods employed by the user in applying its products, any warranty either written or implied is given in good faith and can only cover the material itself.

If in doubt regarding any of the above points, please contact our technical services department for advice.

A Material Safety Data Sheet is available on request.

It is the users responsibility to ensure that this data sheet is current prior to using the product.

VIEW OUR FULL RANGE OF PRODUCTS
www.polarcoatings.co.uk




Road 3, Winsford Industrial Estate, Winsford, Cheshire. CW7 3PD
info@polarcoatings.co.uk | 0161 850 0379

Innovate Pioneers for Specialist Coatings

Polar provides you with the expertise and quality to transform & renovate all your DIY projects.

Formerly the creators of Johnstone's paints with over 130 years manufacturing experience...

We deliver reliable, high-performance paints that revive, protect & maintain your home.

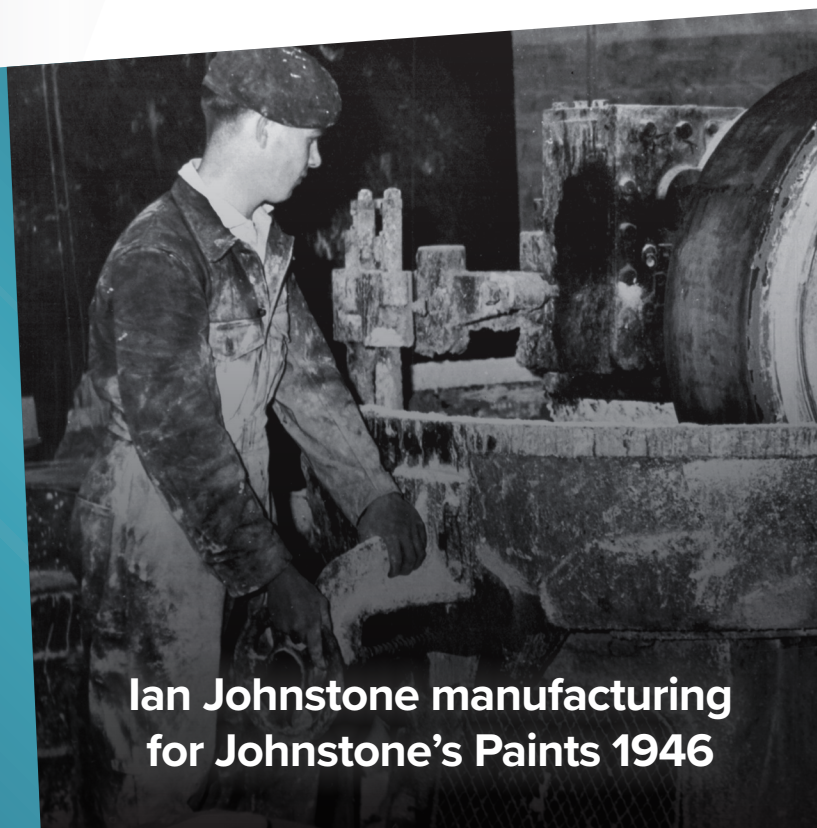

**Ian Johnstone manufacturing
for Johnstone's Paints 1946**