

CONCRETE STAIN

DURABLE DECORATIVE COATING

PERFORMANCE ADVANTAGES

- ▶ Solvent Free
- ▶ Resists Fuel & Oil Stains
- ▶ Revives Concrete Floors
- ▶ Durable Slip Resistant Finish
- ▶ Interior & Exterior Use



HOW TO VIDEO

View our handy 'how-to' video to understand how to get the best results from our products.



**Resists
Fuel & Oil
Stains**



**Solvent
Free &
Eco-friendly**



**Excellent
Slip
Resistance**



DIRECTIONS



Step One

Shake well before use.
Apply an even coat either by
brush or roller.



Step Two

Ensure the surface is
clean, dry and free from all
contaminants.



Step Three

Clean all equipment
thoroughly after use.



Step Four

Apply a second coat and
allow to dry. Allowing 4
hours between coats.

TECHNICAL DATA SHEET

CONCRETE STAIN

USES

- ▶ Specially designed for enhancing the appearance of concrete surfaces.
- ▶ Ideal for use on driveways, walkways, and patios.
- ▶ Adds a decorative touch to your outdoor space.
- ▶ Provides a non-slip surface, making it ideal for areas prone to wetness or dampness.
- ▶ Protects against oil and fuel spills, weathering, fungus and weeds.
- ▶ A solvent-free solution that's gentle on the environment and formulated with non-toxic chemicals, yet still provides a durable, weather-resistant, and smooth matt finish.

COLOUR RANGE

LIGHT GREY

DARK GREY

PACK SIZE

- ▶ 5 Litres.

SPREADING RATE

- ▶ 5 Litres covers up to 30m².

DRYING TIME

- ▶ Touch Dry in 4 hours.
- ▶ Allow 4 hours between coats..

SHELF LIFE

- ▶ Up to 12 months if stored correctly in an unopened container.
- ▶ Store within the temperature range 5°C – 25°C
- ▶ **PROTECT FROM FROST.**

CLEANING

- ▶ Remove as much product as possible from application equipment before cleaning.
- ▶ Clean equipment immediately after use with warm water and rinse thoroughly..

PREPARATION AND APPLICATION

- ▶ All surfaces should be dry (not damp).
- ▶ Free from loose or flaking material, dirt grease and vegetative growth.
- ▶ Not to be applied if there is salt contamination or frost.
- ▶ Stir well before use.
- ▶ Surfaces below 5°C are not suitable for coating.
- ▶ Surfaces above 30°C should be cooled with water spray before application.
- ▶ Apply an even coat either by brush or roller.
- ▶ New concrete should be allowed to mature for several months before coating.

- ▶ Priming is not normally required.
- ▶ Apply 2 coats..

PRECAUTIONS

- ▶ Keep out of reach of children.
- ▶ In case of contact with eyes wash immediately with plenty of water.
- ▶ Remove splashes from skin with soap and water or a recognised hand cleaner.
- ▶ Protect from freezing.
- ▶ Do not apply if there is a risk of heavy rain or frost.
- ▶ Do not use near fishponds.

TECHNICAL DATA SHEET

CONCRETE STAIN



SAFETY

Good working practice should be followed.

The specification and coverage rates are given in good faith and are based on our experience and knowledge but without liability.

As Polar Specialist Coatings Limited has no direct control over the methods employed by the user in applying its products, any warranty either written or implied is given in good faith and can only cover the material itself.

If in doubt regarding any of the above points, please contact our technical services department for advice.

A Material Safety Data Sheet is available on request.

It is the users responsibility to ensure that this data sheet is current prior to using the product.

VIEW OUR FULL RANGE OF PRODUCTS
www.polarcoatings.co.uk




Road 3, Winsford Industrial Estate, Winsford, Cheshire. CW7 3PD
info@polarcoatings.co.uk | 0161 850 0379

Innovate Pioneers for Specialist Coatings

Polar provides you with the expertise and quality to transform & renovate all your DIY projects.

Formerly the creators of Johnstone's paints with over 130 years manufacturing experience...

We deliver reliable, high-performance paints that revive, protect & maintain your home.

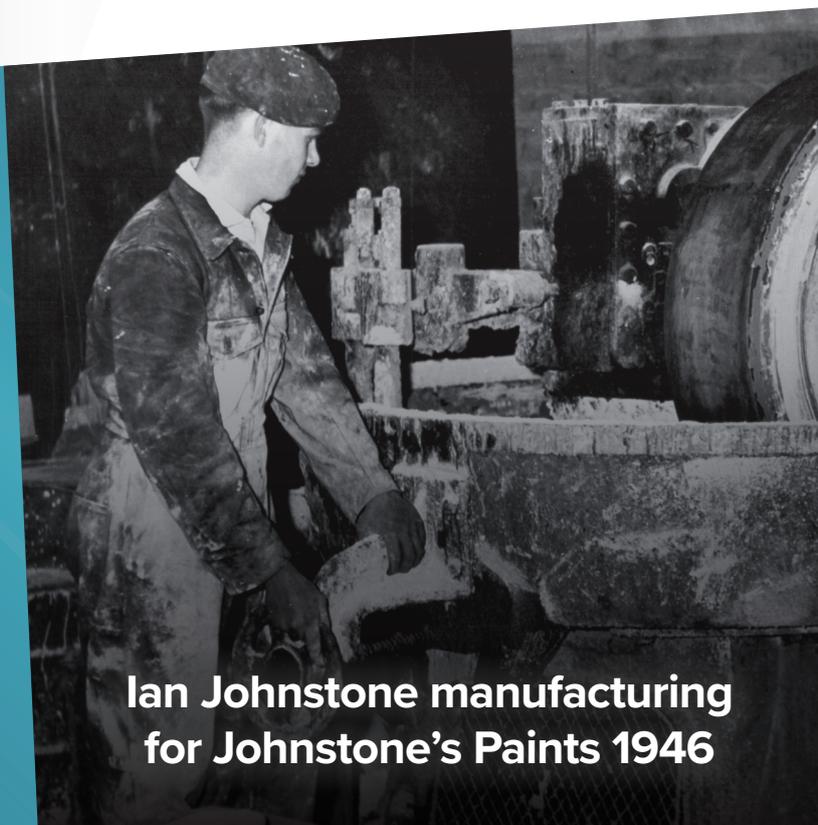

**Ian Johnstone manufacturing
for Johnstone's Paints 1946**