

DAMPSEAL

BLOCKS DAMP PERMANENTLY



PERFORMANCE ADVANTAGES

- ▶ Blocks Damp & Stains
- ▶ Unique Pliolite Formula
- ▶ Primer & Sealer
- ▶ Multi Surface Use
- ▶ Lasting Protection



HOW TO VIDEO

View our handy 'how-to' video to understand how to get the best results from our products.



**Extremely
Durable
Finish**



**Blocks
Damp
& Stains**



**Easy
To
Apply**



DIRECTIONS



Step One

Remove any loose or flaking materials and clean any mould from the area.



Step Two

Paint at least 30cm around the area to prevent dampness spreading.



Step Three

Apply a second coat after 2-3 hours for lasting protection.



TECHNICAL DATA SHEET

DAMPSEAL

USES

- ▶ Ready for use on damp interior wall surfaces including brick, concrete, cement and plaster (not breeze blocks), either as a primer/sealer prior to overpainting or as a finish in its own right.
- ▶ Can be brush applied.
- ▶ Note: this does not remove the need to repair any structural faults which allow water to penetrate into the fabric of the wall.

COLOUR RANGE



PACK SIZE

- ▶ 500ml, 1L, 2.5L and 5L containers.

PREPARATION AND APPLICATION

- ▶ Stir well before use.
- ▶ This paint should be applied preferably to unpainted masonry surfaces. However, if these have been previously painted remove as much of the old paint as possible by thorough scraping and wire brushing.
- ▶ Avoid the inhalation of dust.
- ▶ Wear a suitable face mask if dry sanding.
- ▶ Treat any mould or lichen with Polar FungiSeal before removing with a scraper or stiff brush, then treat again.
- ▶ Special precautions should be taken during surface preparation of pre-1960s paint surfaces over wood and metal as they may contain harmful lead.

CLEANING

- ▶ Remove as much as possible from application equipment before cleaning.
- ▶ Clean equipment immediately after use with white spirit

SPREADING RATE

- ▶ Up to 8m²/litre.
- ▶ Apply 2 coats.
- ▶ It is important to ensure that this total film thickness is achieved-do not overspread.

DRYING TIME

- ▶ Touch dry in 2-3 hours.
- ▶ Recoatable after 16-24 hours.
- ▶ Curing of the coating can be extended at lower temperatures.

SHELF LIFE

- ▶ Up to 2 years if stored correctly in an unopened container.

PRECAUTIONS

- ▶ **Flammable!** Keep away from sources of ignition.
- ▶ Ensure good ventilation during application.
- ▶ Wear gloves, goggles and suitable protective clothing.
- ▶ In case of contact with eyes rinse immediately with plenty of water and seek medical advice.
- ▶ Remove splashes from the skin with a recognised hand cleaner or plenty of soap and water.
- ▶ Keep out of reach of children.
- ▶ Do not use near fishponds.
- ▶ Toxic to aquatic organisms. May cause long term adverse effects in the aquatic environments.
- ▶ Do not empty into drains.

TECHNICAL DATA SHEET

DAMPSEAL



SAFETY

Good working practice should be followed and safety/walking boards should be utilised where required.

The specification and coverage rates are given in good faith and are based on our experience and knowledge but without liability.

As Polar Specialist Coatings Limited has no direct control over the methods employed by the user in applying its products, any warranty either written or implied is given in good faith and can only cover the material itself.

If in doubt regarding any of the above points, please contact our technical services department for advice.

A Material Safety Data Sheet is available on request.

It is the users responsibility to ensure that this data sheet is current prior to using the product.

VIEW OUR FULL RANGE OF PRODUCTS
www.polarcoatings.co.uk




Road 3, Winsford Industrial Estate, Winsford, Cheshire. CW7 3PD
info@polarcoatings.co.uk | 0161 850 0379

Innovate Pioneers for Specialist Coatings

Polar provides you with the expertise and quality to transform & renovate all your DIY projects.

Formerly the creators of Johnstone's paints with over 130 years manufacturing experience...

We deliver reliable, high-performance paints that revive, protect & maintain your home.

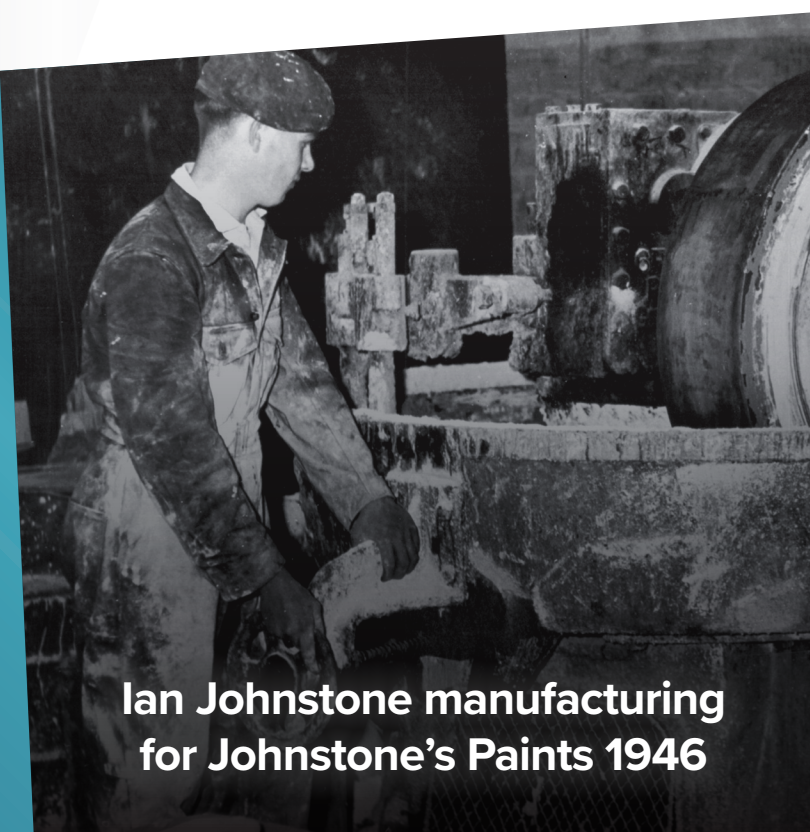

**Ian Johnstone manufacturing
for Johnstone's Paints 1946**