

DAMP & STAIN BLOCK

DECORATIVE FINISH

POLAR
RENOVATE ▴ REVIVE ▴ PROTECT

PERFORMANCE ADVANTAGES

- ▶ Blocks Damp & Stains
- ▶ Primer & Sealer
- ▶ Multi Surface Use
- ▶ Rapid Drying
- ▶ Lasting Protection



HOW TO VIDEO

View our handy 'how-to' video to understand how to get the best results from our products.



One Coat Application



Blocks Damp & Stains



Easy To Apply




DIRECTIONS



Step One

Ensure the surface is free of dust, flakes of rust, grime, greases, oils etc.



Step Two

Shake the can thoroughly for at least two minutes. Apply sparingly from a distance of 15 – 25cm.



RENOVATE ▴ REVIVE ▴ PROTECT

TECHNICAL DATA SHEET

DAMP & STAIN BLOCK

USES

- ▶ As the basis of all normal decorative applications. Suitable for use on interior walls or ceilings, including plaster, cement and stone.
- ▶ Spray can application.
- ▶ **Not for use** on surfaces previously treated with alkyd paints, without first ascertaining suitability.

COLOUR RANGE

WHITE

PACK SIZE

- ▶ 500ml can.

SPREADING RATE

- ▶ 500ml covers up to 2-3m²
- ▶ Apply 2 coats minimum.

DRYING TIME

- ▶ Dry in only 10 minutes

PREPARATION AND APPLICATION

- ▶ Shake well until mixing ball rattles and continue for one minute.
- ▶ Shake can occasionally during use.
- ▶ Spray can from a distance of 20-30cm.
- ▶ Spray can in a motion from left to right or up and down until the area is covered with an even coat.
- ▶ Allow to dry fully and apply a second coat if required.
- ▶ When completely dry, surfaces can be painted or wallpapered over.
- ▶ On completion of use, invert can and depress actuator for a few seconds to prevent nozzle blockage.

PHYSICAL PROPERTIES

Appearance	White with characteristic paint solvent odours.
pH	Not applicable
Specific Gravity	1.155 - 1.225
Viscosity	500 - 1,500cPs
Non Volatiles % m/m	50 - 60
Active Content % m/m, as supplied	15 - 25
Flammability, as supplied	Extremely Flammable, flash point below -20°C
Composition Data, as supplied	A solvent based solution of an acrylic resin containing a range of pigments, extenders and thixotropes dispersed in a butane/propane/isobutane based propellant.
Volatile Organic Content as supplied	Compliant with EU Directive 2004/42/CE
Service Temperatures	Up to 50 deg C
Application Temperatures	15 - 25°C

TECHNICAL DATA SHEET

DAMP & STAIN BLOCK



SAFETY

Good working practice should be followed and safety/walking boards should be utilised where required.

The specification and coverage rates are given in good faith and are based on our experience and knowledge but without liability.

As Polar Specialist Coatings Limited has no direct control over the methods employed by the user in applying its products, any warranty either written or implied is given in good faith and can only cover the material itself.

If in doubt regarding any of the above points, please contact our technical services department for advice.

A Material Safety Data Sheet is available on request.

It is the users responsibility to ensure that this data sheet is current prior to using the product.

VIEW OUR FULL RANGE OF PRODUCTS
www.polarcoatings.co.uk




Road 3, Winsford Industrial Estate, Winsford, Cheshire. CW7 3PD
info@polarcoatings.co.uk | 0161 850 0379

Innovate Pioneers for Specialist Coatings

Polar provides you with the expertise and quality to transform & renovate all your DIY projects.

Formerly the creators of Johnstone's paints with over 130 years manufacturing experience...

We deliver reliable, high-performance paints that revive, protect & maintain your home.

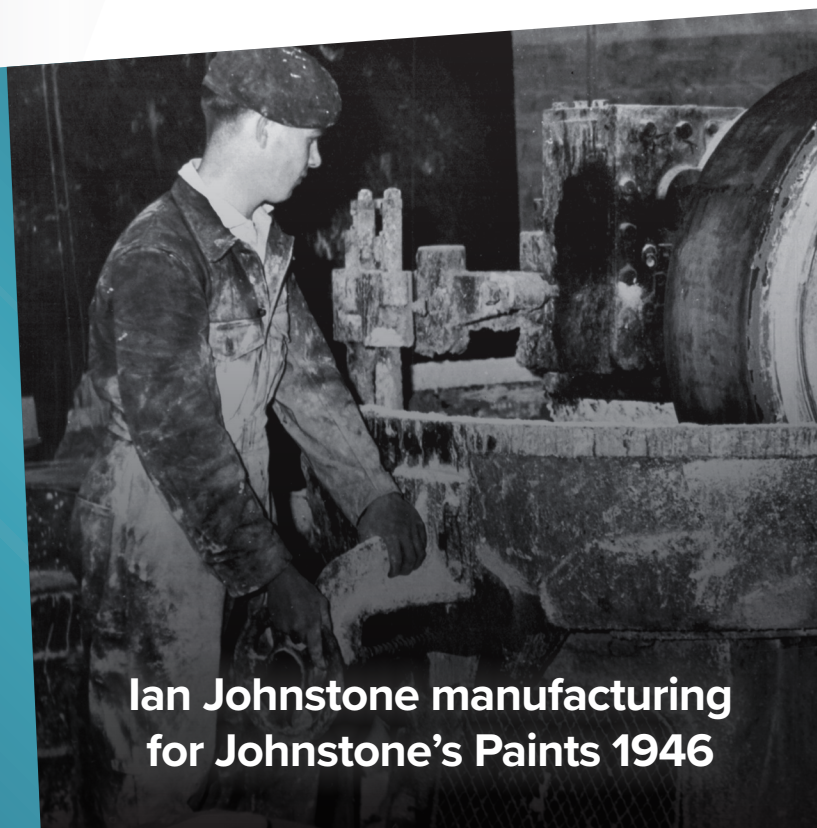

**Ian Johnstone manufacturing
for Johnstone's Paints 1946**