

FLAWLESS LACQUER

DEFENSIVE & PROTECTIVE

POLAR
RENOVATE ▸ REVIVE ▸ PROTECT

PERFORMANCE ADVANTAGES

- ▶ Durable Protective Clear Coat
- ▶ UV, Weather & Scratch Resistant
- ▶ Multi Surface Use
- ▶ Rapid Drying
- ▶ Non Yellowing & Durable



HOW TO VIDEO

View our handy 'how-to' video to understand how to get the best results from our products.



**Crystal
Clear
Finish**



**Durable
Protective
Lacquer**



**Interior
& Exterior
Use**



DIRECTIONS



Step One

Clean the surface thoroughly removing all traces of greases, oils, dirt, grime and un-sound existing coatings.



Step Two

Shake the can thoroughly for at least two minutes. Apply sparingly from a distance of 15 – 25cm.



Step Three

Apply 2 to 3 light coats as necessary to achieve total and even coverage.



RENOVATE ▸ REVIVE ▸ PROTECT

TECHNICAL DATA SHEET

FLAWLESS LACQUER

USES

- ▶ Ready for use on most bare and coated substrates, including wood, metals, plastics, and on such applications as protection of electronic components, paper documents etc.
- ▶ For interior and exterior use.
- ▶ Spray can application.
- ▶ **Do not apply** when the air or substrate temperatures are likely to fall below 8°C or when the relative humidity is above 80% during application or the drying period.

COLOUR RANGE

CLEAR

FINISHES

- ▶ Matt, Satin & Gloss.

PACK SIZE

- ▶ 400ml.

SPREADING RATE

- ▶ Up to 2 square metres/400ml can depending on the nature and porosity of the surface.

DRYING TIME

- ▶ Touch Dry in 15-30 minutes.
- ▶ Recoatable after 20 minutes.

SHELF LIFE

- ▶ Keeps for up to 2 years when stored correctly.

PREPARATION AND APPLICATION

- ▶ Clean the surface thoroughly removing all traces of greases, oils, dirt, grime and un-sound existing coatings.
- ▶ Shake can thoroughly.
- ▶ Hold upright, and spray evenly onto the surface from a distance of 25 to 30cm.
- ▶ If nozzle blocks, invert can and pulse spray until clear.
- ▶ Allow to dry for between 15 and 30 minutes.
- ▶ When further coats are required, allow 20 minutes between applications.
- ▶ Where over-coating of a previously applied alkyd coating is suspected, always test for suitability of use by applying several coats of clear acrylic lacquer in an inconspicuous area, and allow to dry thoroughly to establish absence of wrinkling and other surface defects.
- ▶ After use, always invert can and depress actuator to prevent nozzle blockage.

CLEANING

- ▶ Remove as much product as possible from application equipment before cleaning. Replace lid firmly.
- ▶ Clean equipment immediately after use with warm soapy water and rinse thoroughly.
- ▶ Some local authorities have special facilities for the disposal of waste coatings.
- ▶ Do not empty product into drains or watercourses.

PRECAUTIONS

- ▶ **Flammable** keep away from sources of ignition.
- ▶ Ensure good ventilation during application - use outdoors or in a well-ventilated area.
- ▶ Wear gloves, goggles and suitable protective clothing.
- ▶ In case of contact with eyes rinse immediately with plenty of water and seek medical advice. Remove contact lenses if present and easy to do.
- ▶ Remove splashes from the skin with a recognised hand cleaner or plenty of soap and water.
- ▶ Keep out of reach of children.

TECHNICAL DATA SHEET

FLAWLESS LACQUER



- ▶ May cause drowsiness or dizziness.
- ▶ Avoid breathing vapour/spray.
- ▶ Dispose of contents/container in accordance with local regulations.
- ▶ Repeated exposure may cause skin dryness or cracking. Contains acetone.
- ▶ **CAUTION:** Pressurised container: May burst if heated. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F. Do not pierce or burn, even after use. Do not spray on an open flame or other ignition source. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.
- ▶ Use only as directed.

SAFETY

Please refer to the Safety, Health and Environmental Information on the container.

Take special precautions during the surface

preparation of pre 1960's painted surfaces as they may contain harmful lead.

For further information contact the Customer Relations Team.

When preparing the surfaces avoid the inhalation of dust and/or metal particles. Wear a suitable facemask.

Material Safety Data Sheets for this and all other Polar Specialist Coatings products are freely available from our website:
www.polarcoatings.co.uk

Store in secure dry conditions inaccessible to children or animals.

Containers should be kept closed during storage.

Do not empty into drains, watercourses or access routes to septic tanks.




Road 3, Winsford Industrial Estate, Winsford, Cheshire. CW7 3PD
info@polarcoatings.co.uk | 0161 850 0379

Innovate Pioneers for Specialist Coatings

Polar provides you with the expertise and quality to transform & renovate all your DIY projects.

Formerly the creators of Johnstone's paints with over 130 years manufacturing experience...

We deliver reliable, high-performance paints that revive, protect & maintain your home.

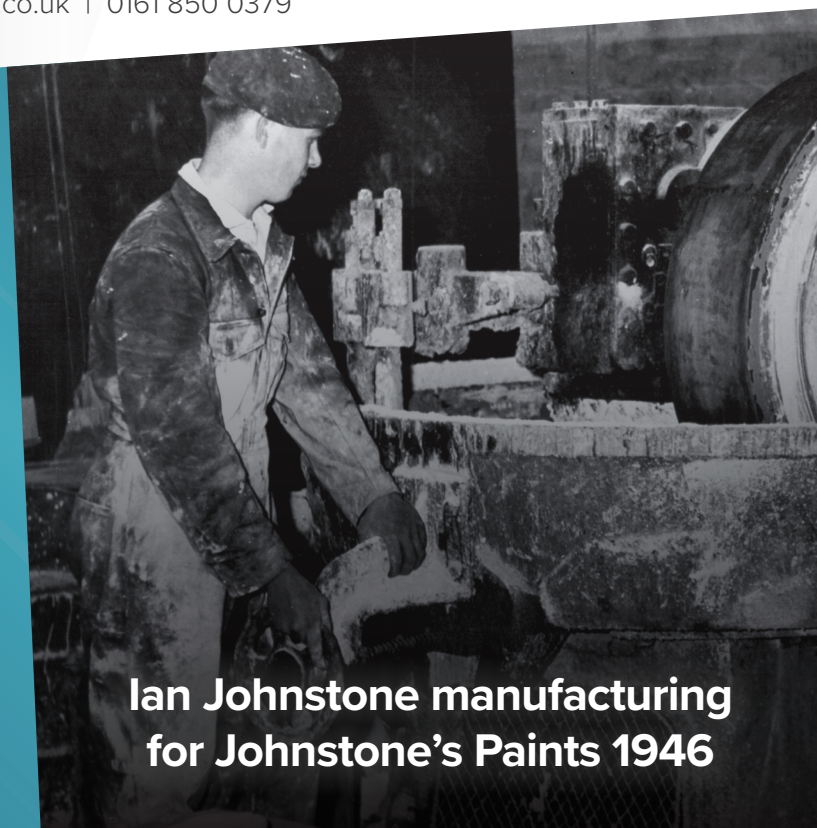

**Ian Johnstone manufacturing
for Johnstone's Paints 1946**