

LEAKSEALER

FILLS AND SEALS

POLAR
RENOVATE ▴ REVIVE ▴ PROTECT

PERFORMANCE ADVANTAGES

- ▶ Seals Fine Leaks & Cracks
- ▶ Tough & Flexible
- ▶ Rubberised Protective Formula
- ▶ High Weather Resistance
- ▶ Easy To Use



HOW TO VIDEO

View our handy 'how-to' video to understand how to get the best results from our products.



One Coat Application



Hard Wearing & Water Resistant



Easy To Apply



DIRECTIONS



Step One

Prepare the area to be treated, ensuring freedom from contaminants. Mask area to protect from over-spray.



Step Two

Shake can thoroughly for at least two minutes. Apply sparingly from a distance of 20 - 25cm.



Step Three

Apply 2 - 3 coats to achieve total coverage, leaving 10 - 15 minutes between each application.



Step Four

Allow to dry for 24 hours to develop maximum paint hardness.

RENOVATE ▴ REVIVE ▴ PROTECT

TECHNICAL DATA SHEET

LEAKSEALER

USES

- ▶ Can be applied to most rigid surfaces including metal, wood, plastics and ceramics.

DO NOT USE ON:

- ▶ Domestic drinking water systems
- ▶ Freshly painted substrates
- ▶ Near children or pets.

* If unsure of suitability it is recommended to test compatibility before first use.

COLOUR RANGE



PACK SIZE

- ▶ 400ml.

SPREADING RATE

- ▶ Up to 2 square metres/400ml can depending on the nature and porosity of the surface.
- ▶ 2 coats required.

DRYING TIME

- ▶ Allow 10-15 minutes between each coat.
- ▶ Minimum 24 hours for full paint hardness.

SHELF LIFE

- ▶ Keeps for up to 2 years when stored correctly.

CLEANING

- ▶ Clean all equipment with white spirit immediately after use.

PREPARATION AND APPLICATION

- ▶ Prepare the area to be treated, ensuring freedom from dust, grime, greases, oils etc, using an appropriate degreaser.
- ▶ Corrosion, other surface contamination, and loosely adhering matter should be removed using a stiff brush or an appropriate grade of wet and dry abrasive paper.
- ▶ Mask area to protect from over-spray.
- ▶ Shake the can thoroughly for at least two minutes.
- ▶ Repeat shaking at regular intervals during use.
- ▶ Apply sparingly from a distance of 20 – 25cm.
- ▶ Apply typically 2 to 3 coats or as necessary to achieve total and even coverage, leaving 10 - 15 minutes between each application.
- ▶ Allow to dry for 24 hours to develop maximum paint hardness.
- ▶ On completion of use, invert can and depress actuator for a few seconds to prevent nozzle blockage.

PRECAUTIONS

- ▶ **Flammable** keep away from sources of ignition.
- ▶ Ensure good ventilation during application - use outdoors or in a well-ventilated area.
- ▶ Wear gloves, goggles and suitable protective clothing.
- ▶ In case of contact with eyes rinse immediately with plenty of water and seek medical advice. Remove contact lenses if present and easy to do.
- ▶ Remove splashes from the skin with a recognised hand cleaner or plenty of soap and water.
- ▶ Keep out of reach of children.
- ▶ May cause drowsiness or dizziness.
- ▶ Avoid breathing vapour/spray.
- ▶ Dispose of contents/container in accordance with local regulations.
- ▶ Repeated exposure may cause skin dryness or cracking. Contains acetone.
- ▶ **CAUTION:** Pressurised container: May burst if heated. Protect from sunlight. Do not expose to

TECHNICAL DATA SHEET

LEAKSEALER



temperatures exceeding 50°C/122°F. Do not pierce or burn, even after use. Do not spray on an open flame or other ignition source. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.

- ▶ Use only as directed.

SAFETY

Good working practice should be followed and safety/walking boards should be utilised where required.

The specification and coverage rates are given in good faith and are based on our experience and knowledge but without liability.

As Polar Specialist Coatings Limited has no direct control over the methods employed by the user in applying its products, any warranty either written or implied is given in good faith and can only cover the material itself.

If in doubt regarding any of the above points, please contact our technical services department for advice.

A Material Safety Data Sheet is available on request.

It is the users responsibility to ensure that this data sheet is current prior to using the product.

VIEW OUR FULL RANGE OF PRODUCTS
www.polarcoatings.co.uk




Road 3, Winsford Industrial Estate, Winsford, Cheshire. CW7 3PD
info@polarcoatings.co.uk | 0161 850 0379

Innovate Pioneers for Specialist Coatings

Polar provides you with the expertise and quality to transform & renovate all your DIY projects.

Formerly the creators of Johnstone's paints with over 130 years manufacturing experience...

We deliver reliable, high-performance paints that revive, protect & maintain your home.

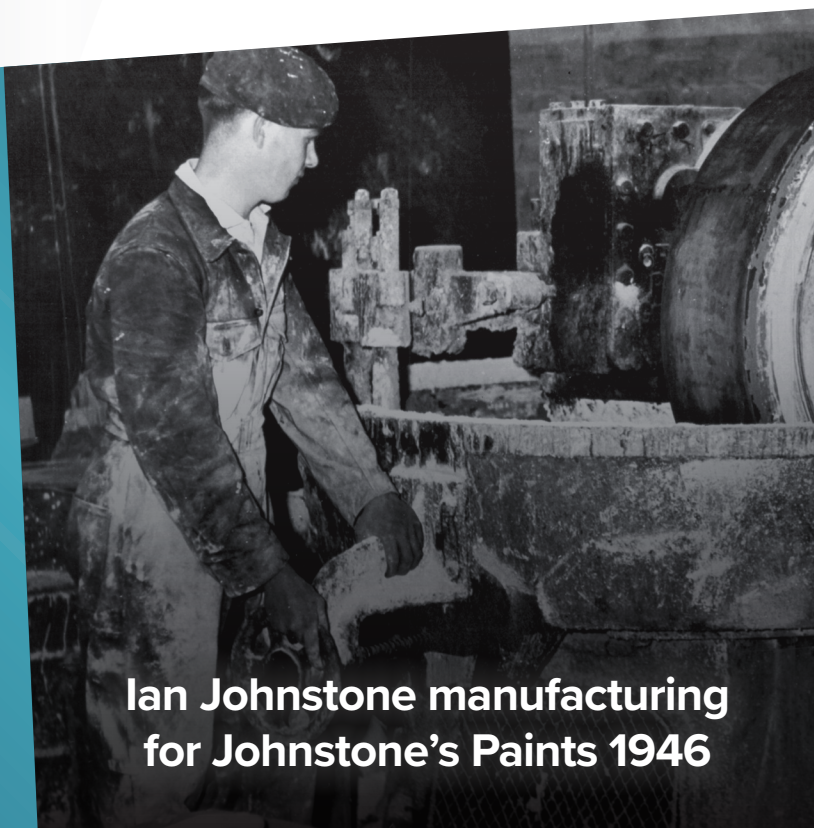

**Ian Johnstone manufacturing
for Johnstone's Paints 1946**