

# METAL PAINT

DIRECT TO RUST

**POLAR**  
RENOVATE ▸ REVIVE ▸ PROTECT

## PERFORMANCE ADVANTAGES

- ▶ All in One Paint & Primer
- ▶ Protects Against Rust & Corrosion
- ▶ UV & Colour Fade Resistant
- ▶ Rapid Drying
- ▶ Tough & Durable Finish



## HOW TO VIDEO

View our handy 'how-to' video to understand how to get the best results from our products.



All In  
One Paint  
& Primer



Extremely  
Durable  
Finish



Quick  
Drying  
Time




## DIRECTIONS



### Step One

Ensure surface is free of dust, flakes and residue by abrading surface. Wipe with white spirit dampened cloth.



### Step Two

Shake the can thoroughly for at least two minutes. Apply sparingly from a distance of 15 – 25cm.



### Step Three

Apply 2 to 3 light coats as necessary to achieve total and even coverage.



RENOVATE ▸ REVIVE ▸ PROTECT

# TECHNICAL DATA SHEET

## METAL PAINT – DIRECT TO RUST

### USES

- ▶ Ready for use primarily on metal doors, metal garden furniture, metal gates and railings.
- ▶ Designed primarily for direct application onto both ferrous and non-ferrous metal substrates.

#### For exterior use.

- ▶ Spray can application.
- ▶ **Do not apply** when the air or substrate temperatures are likely to fall below 8°C or when the relative humidity is above 80% during application or the drying period.

### COLOUR RANGE



### PACK SIZE

- ▶ 400ml.

### SPREADING RATE

- ▶ Up to 2 square metres/400ml can depending on the nature and porosity of the surface.
- ▶ 2 coats required.

### DRYING TIME

- ▶ Recoatable after 15 minutes.
- ▶ Fully Dry in 24 hours.

### SHELF LIFE

- ▶ Up to 12 months if stored correctly in an unopened container.

### PREPARATION AND APPLICATION

- ▶ Protect all non metallic components and prepare the area to be painted
- ▶ If necessary, ensuring freedom from dust, flakes of rust, grime, greases, oils etc by abrading the surface where required and wiping with a cloth dampened with white spirit.
- ▶ Allow to dry.
- ▶ **Shake the can thoroughly for at least two minutes.**
- ▶ Repeat shaking at regular intervals during use.
- ▶ Apply sparingly from a distance of 15 - 25cm.
- ▶ Apply 2 to 3 light coats as necessary to achieve total and even coverage, leaving about 15 minutes between each application.
- ▶ Allow to dry for 24 hours to develop maximum paint hardness.

**On completion of use, invert the can and depress the actuator for a few seconds to prevent nozzle blockage.**

### CLEANING

- ▶ Remove as much product as possible from application equipment before cleaning. Replace lid firmly.
- ▶ Clean equipment immediately after use with warm soapy water and rinse thoroughly.
- ▶ Some local authorities have special facilities for the disposal of waste coatings.
- ▶ Do not empty product into drains or watercourses.

### PRECAUTIONS

- ▶ Keep out of reach of children.
- ▶ In case of contact with eyes wash immediately with plenty of water.
- ▶ Remove splashes from skin with soap and water or a recognised hand cleaner.
- ▶ Protect from freezing.
- ▶ Do not apply paint if there is a risk of heavy rain or frost.
- ▶ Do not use near fishponds.

# TECHNICAL DATA SHEET

## METAL PAINT – DIRECT TO RUST



### SAFETY

Please refer to the Safety, Health and Environmental Information on the container

Take special precautions during the surface preparation of pre 1960's painted surfaces as they may contain harmful lead.

For further information contact the Customer Relations Team.

When preparing the surfaces avoid the inhalation of dust and/or metal particles. Wear a suitable facemask.

**Material Safety Data Sheets for this and all other Polar Specialist Coatings products are freely available from our website:**

**[www.polarcoatings.co.uk](http://www.polarcoatings.co.uk).**

Store in secure dry conditions inaccessible to children or animals.

Containers should be kept closed during storage.

Do not empty into drains, watercourses or access routes to septic tanks.

**VIEW OUR FULL RANGE OF PRODUCTS**

**[www.polarcoatings.co.uk](http://www.polarcoatings.co.uk)**




Road 3, Winsford Industrial Estate, Winsford, Cheshire. CW7 3PD  
[info@polarcoatings.co.uk](mailto:info@polarcoatings.co.uk) | 0161 850 0379

## Innovate Pioneers for Specialist Coatings

Polar provides you with the expertise and quality to transform & renovate all your DIY projects.

Formerly the creators of Johnstone's paints with over 130 years manufacturing experience...

We deliver reliable, high-performance paints that revive, protect & maintain your home.

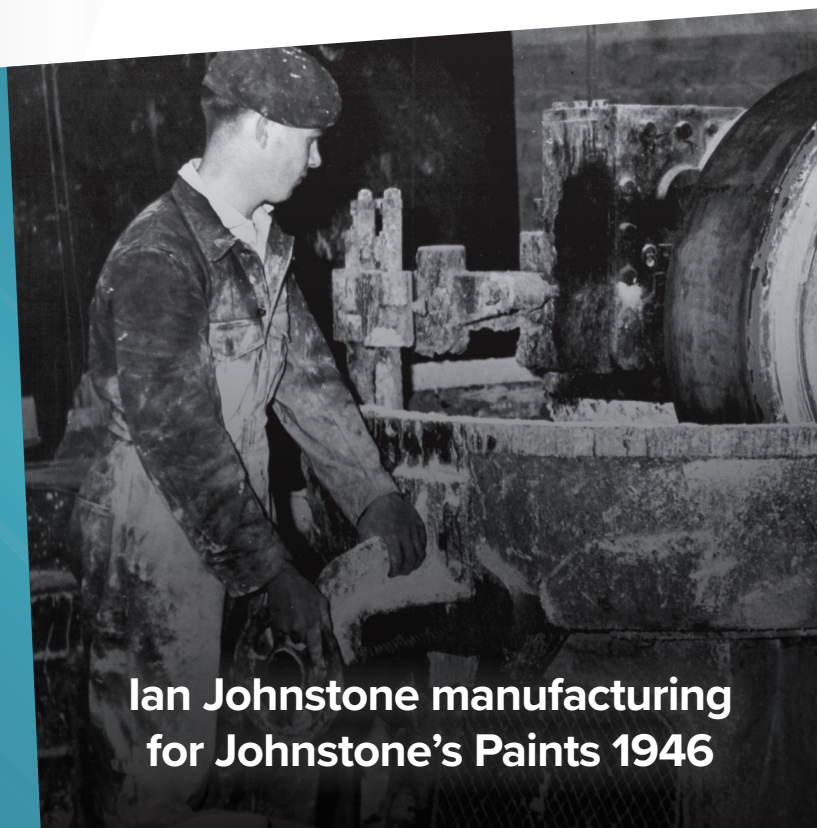

**Ian Johnstone manufacturing  
for Johnstone's Paints 1946**