

# PATIO PAINT

ECO-FRIENDLY DURABLE COATING

## PERFORMANCE ADVANTAGES

- ▶ Tough & Durable Finish
- ▶ Jet Washable
- ▶ Solvent Free
- ▶ UV & Weather Resistant



## HOW TO VIDEO

View our handy 'how-to' video to understand how to get the best results from our products.



Jet Washable & Durable



Solvent Free & Eco-friendly



Easy To Apply



## DIRECTIONS



### Step One

Surfaces should be washed and dry before application.



### Step Two

Shake well before use. Apply thin layers using a brush, roller or airless sprayer.



### Step Three

Allow to dry thoroughly before applying a second coat. 2-3 coats are recommended.



### Step Four

Dry in 3-4 hours. Drying time can be longer in colder conditions.

# TECHNICAL DATA SHEET

## PATIO PAINT

### USES

- ▶ Specially designed for adding a finishing touch to garden patios.
- ▶ Works perfectly on concrete, stone flags and patio paving slabs.
- ▶ The ideal solution for decorating patios, driveways and garden pathways.
- ▶ Can be used on internal and external masonry walls and floors in domestic or public places.

### COLOUR RANGE

LIGHT GREY

DARK GREY

BLACK

### PACK SIZE

- ▶ 2.5 Litre and 5 Litre.

### SPREADING RATE

- ▶ 1 Litre covers up to 11m<sup>2</sup>.

### DRYING TIME

- ▶ Dry in 3-4 hours.
- ▶ Drying time can be longer in colder conditions.

### SHELF LIFE

- ▶ Up to 12 months if stored correctly in an unopened container.
- ▶ Store within the temperature range 5°C-25°C.
- ▶ Protect from frost.

### CLEANING

- ▶ Clean all equipment with water immediately after use.
- ▶ Clean cured coating with white spirit.

### PREPARATION AND APPLICATION

- ▶ Surfaces should be washed and dry before application.
- ▶ For best performance, we recommend using Polar Acid Etch prior to application.
- ▶ Shake well before use.
- ▶ Apply only in dry conditions with a minimum temperature of 10°C.
- ▶ Apply thin layers using a brush, roller or airless sprayer.
- ▶ Allow to dry thoroughly before applying a second coat. 2-3 coats are recommended.
- ▶ Dry in 3-4 hours.
- ▶ Drying time can be longer in colder conditions.

### PRECAUTIONS

- ▶ Keep out of reach of children.
- ▶ In case of contact with eyes wash immediately with plenty of water.
- ▶ Remove splashes from skin with soap and water or a recognised hand cleaner.
- ▶ Protect from freezing.
- ▶ Do not apply paint if there is a risk of heavy rain or frost.
- ▶ Do not use near fishponds.
- ▶ Shade variations may occur between different batches. When completing projects requiring more than one tin ensure they are from the same batch.



# TECHNICAL DATA SHEET

## PATIO PAINT



### SAFETY

Good working practice should be followed.

The specification and coverage rates are given in good faith and are based on our experience and knowledge but without liability.

*As Polar Specialist Coatings Limited has no direct control over the methods employed by the user in applying its products, any warranty either written or implied is given in good faith and can only cover the material itself.*

If in doubt regarding any of the above points, please contact our technical services department for advice.

**A Material Safety Data Sheet is available on request.**

It is the users responsibility to ensure that this data sheet is current prior to using the product.

VIEW OUR FULL RANGE OF PRODUCTS  
[www.polarcoatings.co.uk](http://www.polarcoatings.co.uk)




Road 3, Winsford Industrial Estate, Winsford, Cheshire. CW7 3PD  
[info@polarcoatings.co.uk](mailto:info@polarcoatings.co.uk) | 0161 850 0379

## Innovate Pioneers for Specialist Coatings

Polar provides you with the expertise and quality to transform & renovate all your DIY projects.

Formerly the creators of Johnstone's paints with over 130 years manufacturing experience...

We deliver reliable, high-performance paints that revive, protect & maintain your home.

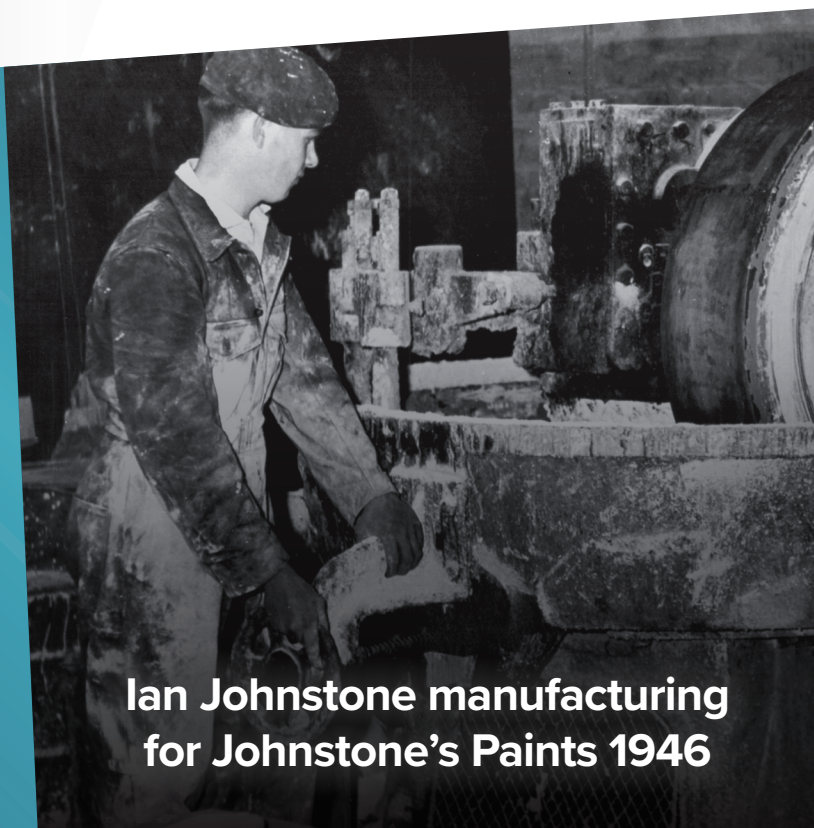

**Ian Johnstone manufacturing  
for Johnstone's Paints 1946**