

RADIATOR PAINT

HIGH HEAT RESISTANCE



PERFORMANCE ADVANTAGES

- ▶ All in One Paint & Primer
- ▶ 100°C Heat Resistance
- ▶ Water Resistant
- ▶ Rapid Drying
- ▶ Tough & Durable Finish



HOW TO VIDEO

View our handy 'how-to' video to understand how to get the best results from our products.



**100°C
Heat
Resistant**



**Hard
Wearing &
Water Resistant**



**Quick
Drying
Time**



DIRECTIONS




Step One

Ensure the surface is free of dust, flakes and residue by abrading surface. Wipe with white spirit dampened cloth.



Step Two

Shake the can thoroughly for at least two minutes. Apply sparingly from a distance of 15 – 25cm.



Step Three

Apply 2 to 3 light coats as necessary to achieve total and even coverage.



TECHNICAL DATA SHEET

RADIATOR PAINT

USES

- ▶ Ready for use on domestic radiators, the exterior surfaces of hot water tanks etc.
- ▶ Spray can application.
- ▶ **Do not use** on surfaces seen or suspected of being unsound, without first ascertaining suitability for use on an inconspicuous area, particularly where any existing coating is believed to be alkyd based.
- ▶ **Do not use** on surfaces expected to reach temperatures in excess of 100°C.

COLOUR RANGE

BLACK

ANTHRACITE

WHITE

PACK SIZE

- ▶ 400ml can.

SPREADING RATE

- ▶ 400ml covers up to 2m²
- ▶ Apply 2-3 coats minimum

DRYING TIME

- ▶ Hard dry within 24 hours depending upon temperature and relative humidity.

PREPARATION AND APPLICATION

- ▶ Prepare surface to be painted with light sanding if necessary. Ensure surfaces are clean, dry, sound and free of all contaminants.

If the radiator has been previously painted check compatibility on an inconspicuous area first.

- ▶ Shake thoroughly for at least two minutes and spray a number of coats from a distance of 25 - 30cm, until required coverage is attained. Allow 24 hours to fully harden.

After use, invert can and depress actuator to prevent nozzle blockage.

PRECAUTIONS

- ▶ **Flammable** keep away from sources of ignition.
- ▶ Ensure good ventilation during application - use outdoors or in a well ventilated area.
- ▶ Wear gloves, goggles and suitable protective clothing.
- ▶ In case of contact with eyes rinse immediately with plenty of water and seek medical advice. Remove contact lenses if present and easy to do.

- ▶ Remove splashes from the skin with a recognised hand cleaner or plenty of soap and water.
- ▶ Keep out of reach of children.
- ▶ May cause drowsiness or dizziness.
- ▶ Avoid breathing vapour/spray.
- ▶ Dispose of contents/container in accordance with local regulations.
- ▶ Repeated exposure may cause skin dryness or cracking.
- ▶ Contains acetone.
- ▶ **CAUTION:** Pressurised container: May burst if heated. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F. Do not pierce or burn, even after use. Do not spray on an open flame or other ignition source. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.
- ▶ Use only as directed.

TECHNICAL DATA SHEET

RADIATOR PAINT



SAFETY

Good working practice should be followed and safety/walking boards should be utilised where required.

The specification and coverage rates are given in good faith and are based on our experience and knowledge but without liability.

As Polar Specialist Coatings Limited has no direct control over the methods employed by the user in applying its products, any warranty either written or implied is given in good faith and can only cover the material itself.

If in doubt regarding any of the above points, please contact our technical services department for advice.

A Material Safety Data Sheet is available on request.

It is the users responsibility to ensure that this data sheet is current prior to using the product.

VIEW OUR FULL RANGE OF PRODUCTS
www.polarcoatings.co.uk




Road 3, Winsford Industrial Estate, Winsford, Cheshire. CW7 3PD
info@polarcoatings.co.uk | 0161 850 0379

Innovate Pioneers for Specialist Coatings

Polar provides you with the expertise and quality to transform & renovate all your DIY projects.

Formerly the creators of Johnstone's paints with over 130 years manufacturing experience...

We deliver reliable, high-performance paints that revive, protect & maintain your home.

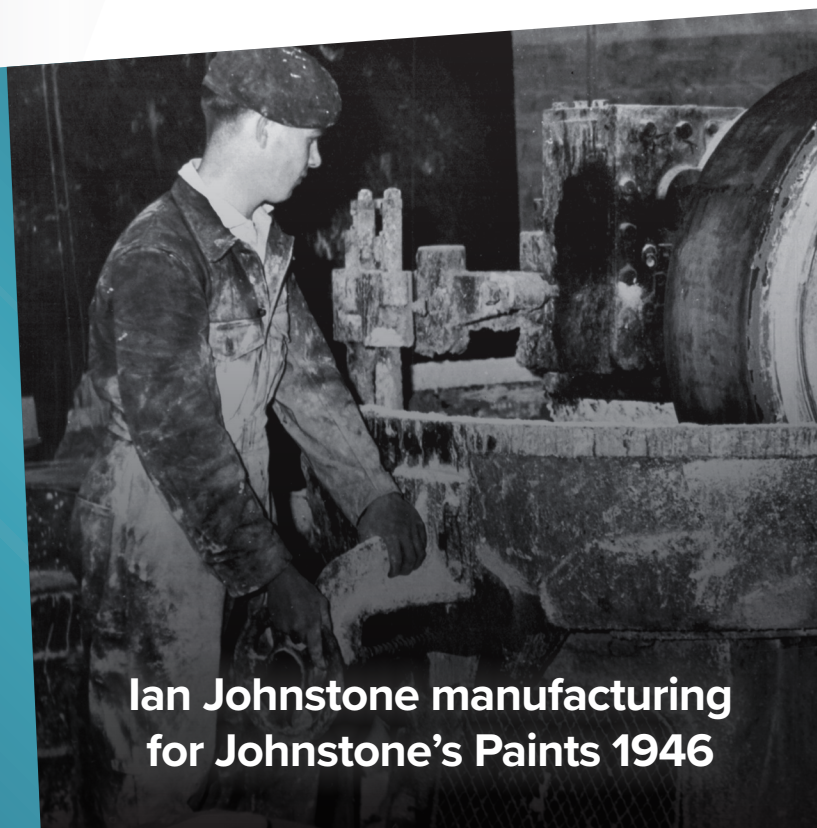

**Ian Johnstone manufacturing
for Johnstone's Paints 1946**