

# STAIN BLOCK

PREVENTS & BLOCKS



## PERFORMANCE ADVANTAGES

- ▶ Blocks Range of Stains
- ▶ Unique Pliolite Formula
- ▶ Primer & Sealer
- ▶ Multi Surface Use
- ▶ Lasting Protection



## HOW TO VIDEO

View our handy 'how-to' video to understand how to get the best results from our products.



**Extremely Durable Finish**



**Blocks Unwanted Stains**



**Easy To Apply**



## DIRECTIONS




### Step One

Ensure the surface is clean, dry and free from wax, grease or oil stains.




### Step Two

Stir well before use. Apply using a brush or roller. Ensure the stain-affected area is extensively covered.



### Step Three

Apply multiple coats within 5 days to seal and prevent stains reappearing. Allow 12-24 hours between coats.

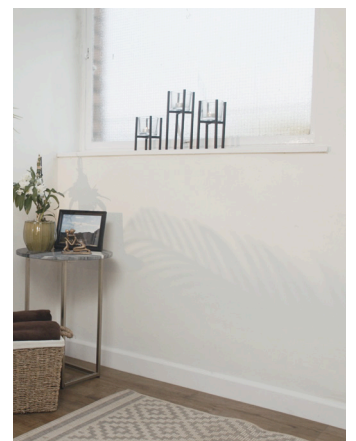

# TECHNICAL DATA SHEET

## STAIN BLOCK

### USES

- ▶ Ready for use on damp interior wall surfaces including brick, concrete, cement and plaster (not breeze blocks).
- ▶ Use as a primer/sealer prior to overpainting or as a finish in its own right.
- ▶ Note: This does not remove the need to repair any structural faults which allow water to penetrate into the fabric of the wall.

### COLOUR RANGE

WHITE

### PACK SIZE

- ▶ 500ml and 1L containers.

### SPREADING RATE

- ▶ 8m<sup>2</sup>/Litre

### DRYING TIME

- ▶ Touch dry in 2-3 hours.
- ▶ Recoatable after 16-24 hours.
- ▶ Curing of the coating can be extended at lower temperatures.

### SHELF LIFE

- ▶ Up to 12 months if stored correctly in an unopened container.

### PREPARATION AND APPLICATION

- ▶ This paint should be applied preferably to unpainted masonry surfaces.
- ▶ However, if these have been previously painted remove as much of the old paint as possible by thorough scraping and wire brushing.

**Avoid the inhalation of dust. Wear a suitable face mask if dry sanding.**

- ▶ Treat any mould or lichen with Polar's FungiSeal before removing with a scraper or stiff brush, then treat again.

**Special precautions should be taken during surface preparation of pre 1960s paint surfaces over wood and metal as they may contain harmful lead.**

### PRECAUTIONS

- ▶ **Flammable!** Keep away from sources of ignition.
- ▶ Ensure good ventilation during application.
- ▶ Wear gloves, goggles and suitable protective clothing.
- ▶ In case of contact with eyes rinse immediately with plenty of water and seek medical advice.
- ▶ Remove splashes from the skin with a recognised hand cleaner or plenty of soap and water.
- ▶ Keep out of reach of children.
- ▶ Do not use near fishponds.
- ▶ Toxic to aquatic organisms. May cause long term adverse effects in the aquatic environments.
- ▶ Do not empty into drains.

# TECHNICAL DATA SHEET

## STAIN BLOCK



### SAFETY

Good working practice should be followed and safety/walking boards should be utilised where required.

The specification and coverage rates are given in good faith and are based on our experience and knowledge but without liability.

*As Polar Specialist Coatings Limited has no direct control over the methods employed by the user in applying its products, any warranty either written or implied is given in good faith and can only cover the material itself.*

If in doubt regarding any of the above points, please contact our technical services department for advice.

**A Material Safety Data Sheet is available on request.**

It is the users responsibility to ensure that this data sheet is current prior to using the product.

VIEW OUR FULL RANGE OF PRODUCTS  
[www.polarcoatings.co.uk](http://www.polarcoatings.co.uk)




Road 3, Winsford Industrial Estate, Winsford, Cheshire. CW7 3PD  
[info@polarcoatings.co.uk](mailto:info@polarcoatings.co.uk) | 0161 850 0379

## Innovate Pioneers for Specialist Coatings

Polar provides you with the expertise and quality to transform & renovate all your DIY projects.

Formerly the creators of Johnstone's paints with over 130 years manufacturing experience...

We deliver reliable, high-performance paints that revive, protect & maintain your home.

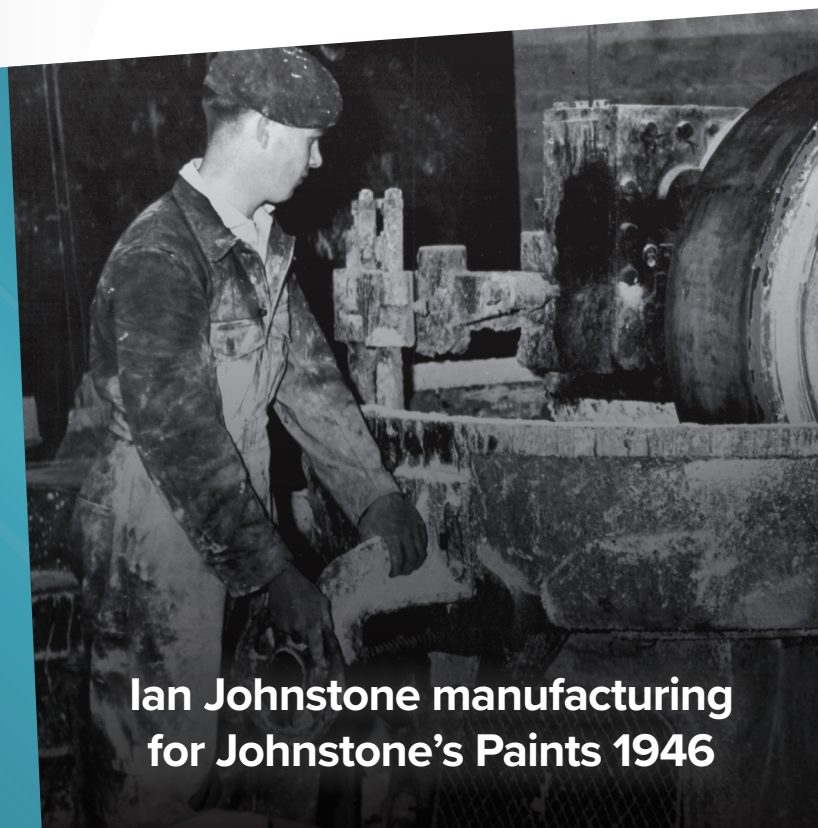

**Ian Johnstone manufacturing  
for Johnstone's Paints 1946**