

TAPSEAL

WATERPROOFING TAPE



PERFORMANCE ADVANTAGES

- ▶ Instant Protection
- ▶ Strong Adhesion
- ▶ All Weather Application
- ▶ Multi Surface Use
- ▶ Lasting Protection



HOW TO VIDEO

View our handy 'how-to' video to understand how to get the best results from our products.



Interior
& Exterior
Use



Hard
Wearing &
Water Resistant



Strong &
Long Lasting
Adhesion



DIRECTIONS



Step One

Prepare the area to be treated, ensuring it is free from dust, grime, greases, oils etc.



Step Two

Measure out the tape and cut to the desired length and peel back the transparent film.



Step Three

Firmly place the tape onto affected area, smooth patch from centre to outer edges to remove any bubbles.



TECHNICAL DATA SHEET

TAPESEAL



USES

- ▶ Super strong rubberised tape offers an instant waterproof solution to cracks and leaks.
- ▶ Weather-resistant strips come with strong adhesive backing.
- ▶ Apply directly to the affected leaking area, instantly sealing any surface where water comes in or out.
- ▶ Patch, bond, seal and repair virtually any surface with our industrial strength, rubberised tape.
- ▶ Add a protective waterproof seal that holds and bonds in place cracked gutters, pipes or home leaks.
- ▶ UV resistant & environmentally friendly, with no harmful chemicals added.

- ▶ Provides long-term leak repair protection.
- ▶ Use on home leaks, shed roof repairs, gutter cracks, door and window sill seepage. Even use on; boats, kayaks, pipes, water taps, hoses, motorhomes, RVs, buckets, bottles, wires, cars, sinks and plumbing.

COLOUR RANGE

BLACK

CLEAR

PACK SIZE

- ▶ 4in x 5ft.

PREPARATION AND APPLICATION

- ▶ Clear all areas of moss, lichen and debris by brushing or power washing and remove surface water and any contamination such as oil or grease and allow to dry.
- ▶ Apply Polar Mould Remover to prevent further fungal/algal growth.
- ▶ Measure the tape to ensure the area is covered fully.
- ▶ Cut TapeSeal to the desired length.
- ▶ Peel back the transparent film.
- ▶ Firmly place the tape onto the affected area and smooth the patch from the center to outer edges to remove any bubbles.

PRECAUTIONS

- ▶ Performance will be dependent on surfaces & conditions.
- ▶ Surfaces must be clean, smooth and non-porous.
- ▶ Water must be pressed out from underneath tape.
- ▶ May not adhere to silicone or water-repellent materials.
- ▶ Do not use to hang.
- ▶ Tape must make complete contact with surface to properly seal.
- ▶ Ensure water and air is pressed out and there are no wrinkles or gaps in the tape. Permanent: may damage surface if removed.

TECHNICAL DATA SHEET

TAPESEAL



SAFETY

Good working practice should be followed.

The specification and coverage rates are given in good faith and are based on our experience and knowledge but without liability.

As Polar Specialist Coatings Limited has no direct control over the methods employed by the user in applying its products, any warranty either written or implied is given in good faith and can only cover the material itself.

If in doubt regarding any of the above points, please contact our technical services department for advice.

A Material Safety Data Sheet is available on request.

It is the users responsibility to ensure that this data sheet is current prior to using the product.

VIEW OUR FULL RANGE OF PRODUCTS
www.polarcoatings.co.uk




Road 3, Winsford Industrial Estate, Winsford, Cheshire. CW7 3PD
info@polarcoatings.co.uk | 0161 850 0379

Innovate Pioneers for Specialist Coatings

Polar provides you with the expertise and quality to transform & renovate all your DIY projects.

Formerly the creators of Johnstone's paints with over 130 years manufacturing experience...

We deliver reliable, high-performance paints that revive, protect & maintain your home.

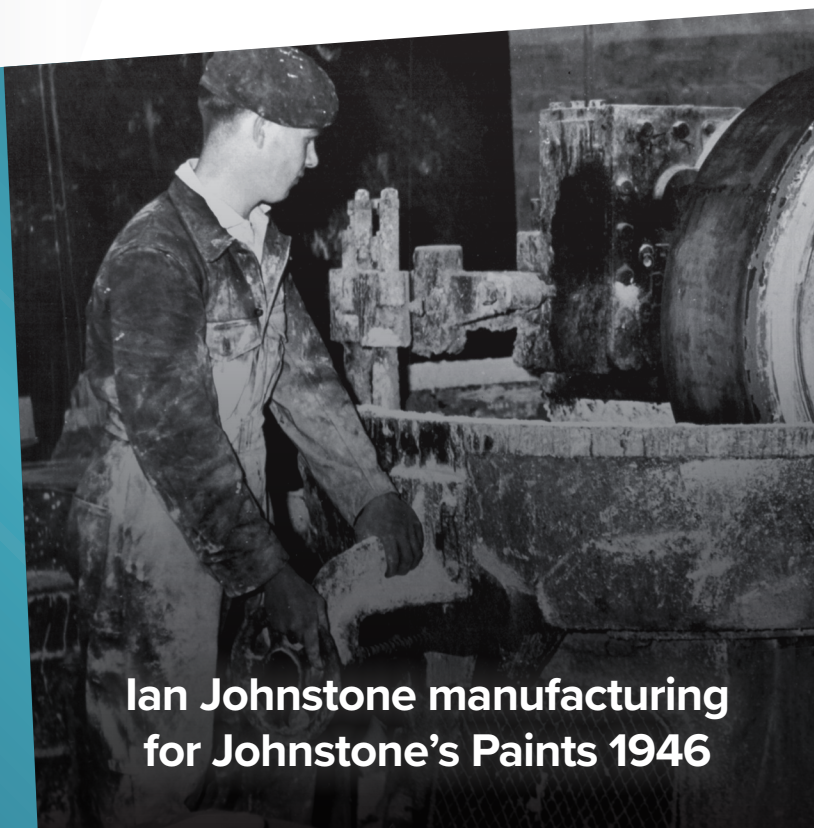

**Ian Johnstone manufacturing
for Johnstone's Paints 1946**