

TILE & GROUT SEALER

SEALS AND PROTECTS



PERFORMANCE ADVANTAGES

- ▶ Water Resistant Formula
- ▶ Durable Protective Clear Coat
- ▶ Lasting Protection
- ▶ Rapid Drying
- ▶ Multi Surface Use



HOW TO VIDEO

View our handy 'how-to' video to understand how to get the best results from our products.



**Protects
Against Mould
& Limescale**



**Crystal
Clear
Finish**



**Hard
Wearing &
Water Resistant**



DIRECTIONS



Step One

Ensure surfaces are clean & free of any contaminants. Ensure area is well-ventilated & avoid breathing spray.



Step Two

Ensure surfaces are covered prior to application. Mask surrounding area to prevent over-spray.



Step Three

Shake can thoroughly before use. Hold upright, and spray directly onto tiles in a uniform manner.



Step Four

Allow 2-3 minutes for solvents to evaporate. Allow to fully harden for at least 24 hours after application.

TECHNICAL DATA SHEET

TILE & GROUT SEALER

USES

- ▶ Specifically designed for use on tiles and grout.
- ▶ Acts as a sacrificial coating to extend the life of the already treated surface.
- ▶ This product does not change the look, feel or texture of the existing tiles.

COLOUR RANGE

CLEAR

PACK SIZE

- ▶ 400ml.

SPREADING RATE

- ▶ Up to 2 square metres/400ml can depending on the nature and porosity of the surface.
- ▶ 2 coats required.

PREPARATION AND APPLICATION

- ▶ For use on dry clean surfaces.
- ▶ Suitable solvent vapour mask (3M 4251 or equivalent) must be worn.
- ▶ Carefully mask surrounding area to prevent over-spray onto paintwork and trim.
- ▶ Shake can thoroughly before use. Hold upright, and spray directly onto tiles in a uniform manner.
- ▶ Allow a couple of minutes for solvent to evaporate.

PRECAUTIONS

- ▶ **Flammable** keep away from sources of ignition.
- ▶ Ensure good ventilation during application - use outdoors or in a well-ventilated area.
- ▶ Wear gloves, goggles and suitable protective clothing.
- ▶ In case of contact with eyes rinse immediately with plenty of water and seek medical advice. Remove contact lenses if present and easy to do.

DRYING TIME

- ▶ Allow 10-15 minutes between each coat.
- ▶ Minimum 24 hours for full coating hardness.

SHELF LIFE

- ▶ Keeps for up to 2 years when stored correctly.

CLEANING

Clean all equipment with white spirit immediately after use.

- ▶ Remove splashes from the skin with a recognised hand cleaner or plenty of soap and water.
- ▶ Keep out of reach of children.
- ▶ May cause drowsiness or dizziness.
- ▶ Avoid breathing vapour/spray.
- ▶ Dispose of contents/container in accordance with local regulations.
- ▶ Repeated exposure may cause skin dryness or cracking. Contains acetone.
- ▶ **CAUTION:** Pressurised container: May burst if heated. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F. Do not pierce or burn, even after use. Do not spray on an open flame or other ignition source. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.
- ▶ Use only as directed.

TECHNICAL DATA SHEET

TILE & GROUT SEALER



SAFETY

Good working practice should be followed.

The specification and coverage rates are given in good faith and are based on our experience and knowledge but without liability.

As Polar Specialist Coatings Limited has no direct control over the methods employed by the user in applying its products, any warranty either written or implied is given in good faith and can only cover the material itself.

If in doubt regarding any of the above points, please contact our technical services department for advice.

A Material Safety Data Sheet is available on request.

It is the users responsibility to ensure that this data sheet is current prior to using the product.

VIEW OUR FULL RANGE OF PRODUCTS

www.polarcoatings.co.uk




Road 3, Winsford Industrial Estate, Winsford, Cheshire. CW7 3PD
info@polarcoatings.co.uk | 0161 850 0379

Innovate Pioneers for Specialist Coatings

Polar provides you with the expertise and quality to transform & renovate all your DIY projects.

Formerly the creators of Johnstone's paints with over 130 years manufacturing experience...

We deliver reliable, high-performance paints that revive, protect & maintain your home.

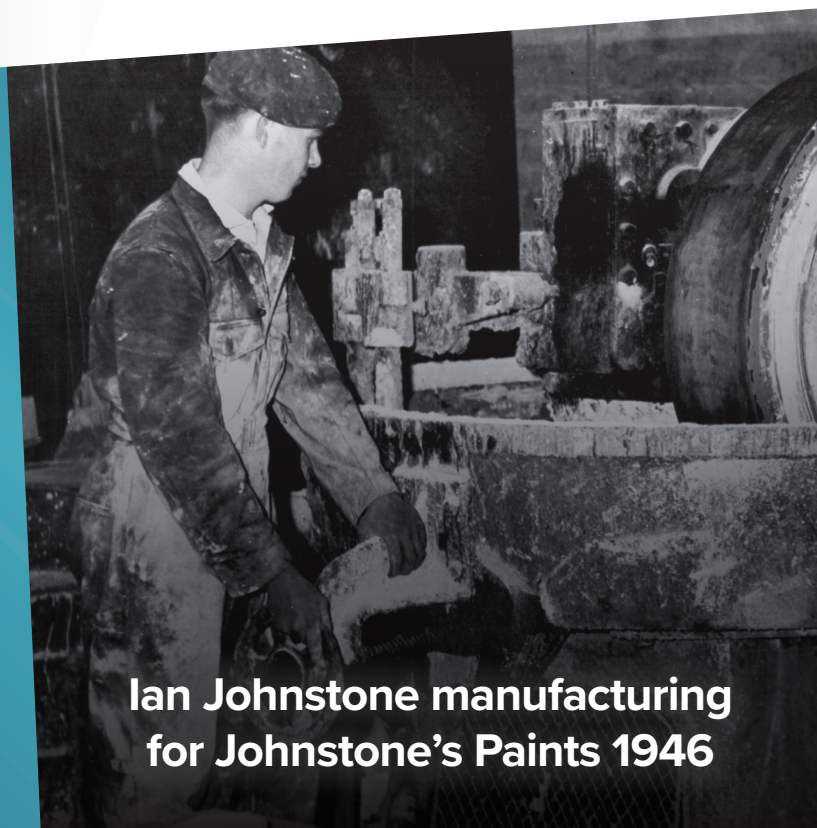

**Ian Johnstone manufacturing
for Johnstone's Paints 1946**