

ArmstrongFlooring™

AUTHENTIC OAK  
& HARDWOOD  
DESIGNS

**Chesterfield™ 4.5**

*Luxury Vinyl Plank*

Booker Oak | 140

# Chesterfield™ 4.5

## Luxury Vinyl Plank

Chesterfield™ 4.5 is designed to complement any space of your home, featuring a range of authentic Australian timber designs.

Crafted with the latest durable technology in Luxury Vinyl flooring, Chesterfield™ 4.5 offers great cleanability, low maintenance, and superior durability suitable for families with children and pets. Enjoy floors that will stand up to scuffs, scratches, dents, and have your floors looking newer for longer.

### Features & Benefits

The PUR coating provides a protective barrier against damage from foot traffic, spills, stains, and abrasion. This coating is resistant to stains, making it suitable for a range of environments in which spills may occur. The superior durability guarantees a low maintenance and easy to clean home.

Enjoy long-lasting beautiful floors suited to the entire family, available in a range of modern and Australian inspired timber designs.



#### Durable

Domestic Heavy Duty (23) and Commercial Heavy Duty (33) offering long term durability.



#### Low Maintenance

Easy to clean PUR coating for low maintenance and resistance to spills and scratches.



#### Pet Friendly

Resistant to scratches, stains, and spills - suitable for all household pets.\*



#### Waterproof Surface

Not affected by spills, suitable for spill prone living areas. Suitable for kitchens.\*



#### Kid Friendly

Low maintenance, resistant to spills and stains.



#### Residential Warranty

25 year residential warranty\* Commercial warranty on request.



#### Micro-bevelled

Provides a realistic and authentic timber-look.



#### Stain Resistant

PUR coating for improved stain resistance, ideal for kitchens.



\*Subject to proper installation and care and maintenance as set out in the Armstrong Flooring Installation Instructions and Cleaning and Care Instructions.

\*All warranties are in addition to any rights consumers may have under Australian consumer laws. Terms and conditions apply - for full information in respect to the scope of the residential warranty, please see [armstrongflooring.au](http://armstrongflooring.au) or contact our Head Office. For the commercial warranty, contact your Armstrong Flooring Territory Sales Manager.



Chesterfield™ 4.5  
1219 x 184 x 4.5 mm



Chardonnay Oak | 105



Silver Oak | 110



Jamieson Oak | 130



Cocoa Oak | 190



Somerset Blackbutt | 215



Blackbutt Traditional | 250



Booker Oak | 140



Euro Oak | 150



Malt Oak | 175



Spotted Gum Traditional | 360



Franklin Tassie Oak | 415



Tasmanian Hardwood Classic | 450

# Chesterfield™ 4.5

## Product Specifications

### Product Classification

Type of floor covering	EN ISO 10582	Luxury Vinyl Plank
Classification	ISO 10874	Domestic Heavy Duty (23) Commercial heavy duty (33) Industrial General Duty (42)
Warranty	Domestic Commercial - available upon request	25 years* 15 years*

\*All warranties are in addition to any rights consumers may have under Australian consumer laws. Terms and conditions apply - for full information in respect to the scope of the residential warranty, please see [armstrongflooring.au](http://armstrongflooring.au) or contact our Head Office. For the commercial warranty, contact your Armstrong Flooring Territory Sales Manager.


### Product Structure

Dimensions (mm)	1219 x 184 x 4.5mm
Surface treatment	PUR > 48% clear
Wear layer (mm)	0.55 mm
Core	Double fibreglass reinforced
Bevel	Micro
Installation	Glue down in accordance with current installation guide and AS1884

### Packaging

Planks/carton	10
m <sup>2</sup> /carton	2.24

### Product Structure

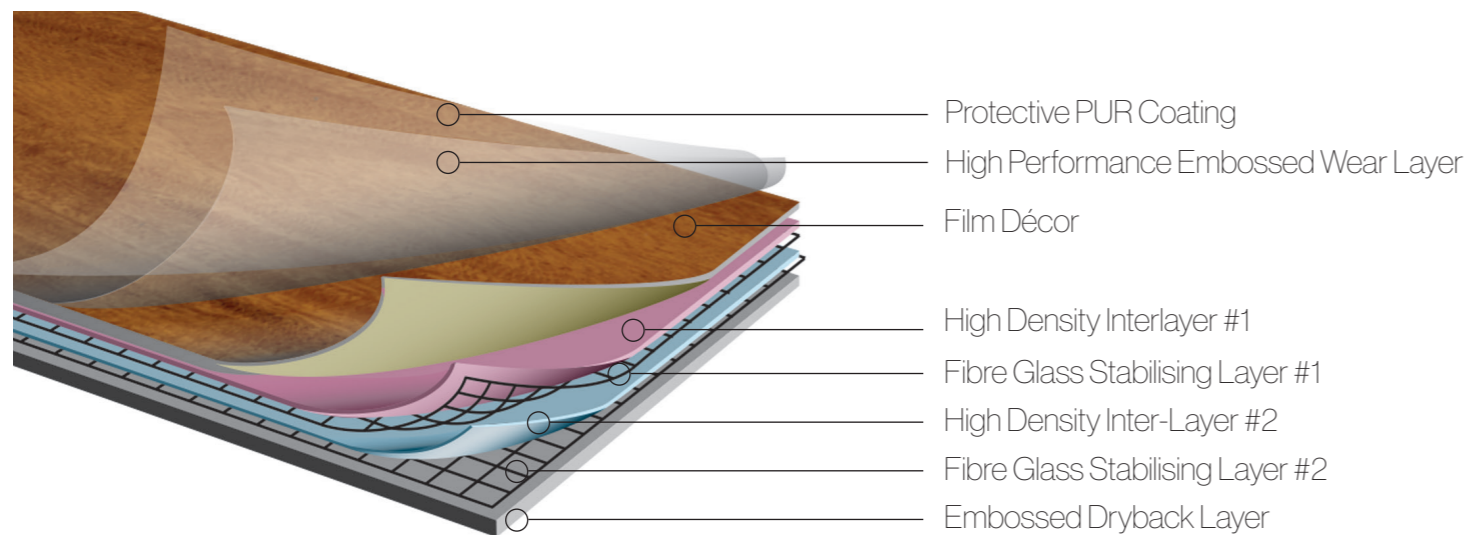

### Product Testing

		Standard	Requirement	Result
Slip	Wet Pendulum	AS4586	-	P3
Fire	Critical radiant flux	AS ISO 9239-1	≥ 4.5kW/m <sup>2</sup>	10.1 kW/m <sup>2</sup>
	Smoke development rate	AS ISO 9239-1	≤ 750%.minutes	148%.minutes
Acoustic	Impact sound insulation (150mm concrete with 3mm underlay and drop ceiling)	ISO 10140-3	≤ 62dB	Ln,w = 42dB (5 Star)
		ISO 717-2	-	-
Surface	Abrasion	EN660-2	-	Group T
	Martindale (wear resistance)	EN16094	MSB-B2	MSB-B1
	UV adhesion	-	≥ 2	2
	Colour fastness	ISO 105-B02	≥ 6	6
Core	Dimensional tolerance	EN427	Length ± 0.30mm Width ± 0.12mm	Length 0.00mm Width 0.00mm
	Peel strength	ISO 24345	> 50N	123N
	Shrink-vertical % (80°C 6hr)	ISO 23999	≤   0.25%	0.081
	Shrink-horizontal % (80°C 6hr)	ISO 23999	≤   0.25%	0.135
	Curling (80°C 6hr)	ISO 23999	≤   2   mm	0.2mm
	Residual indentation	ISO 24343	≤ 0.10mm	0.026mm

### Sustainability


Global GreenTag Global GreenRate Level A

### Collection



## View Flooring in My Space

[www.armstrongflooring.au/chesterfield4.5](http://www.armstrongflooring.au/chesterfield4.5)



---

**Armstrong**Flooring™

29-39 Mills Road, Braeside VIC 3195

1800 632 624

[customerservices@armstrongflooring.au](mailto:customerservices@armstrongflooring.au)

[www.armstrongflooring.au](http://www.armstrongflooring.au)