




Maintaining the appearance and extending the life of NATRALIS™
NATRALIS FOOTHOLD™
ACCOLADE PLUS®
ACCOLADE FOOTHOLD™
ACCOLADE SAFE®



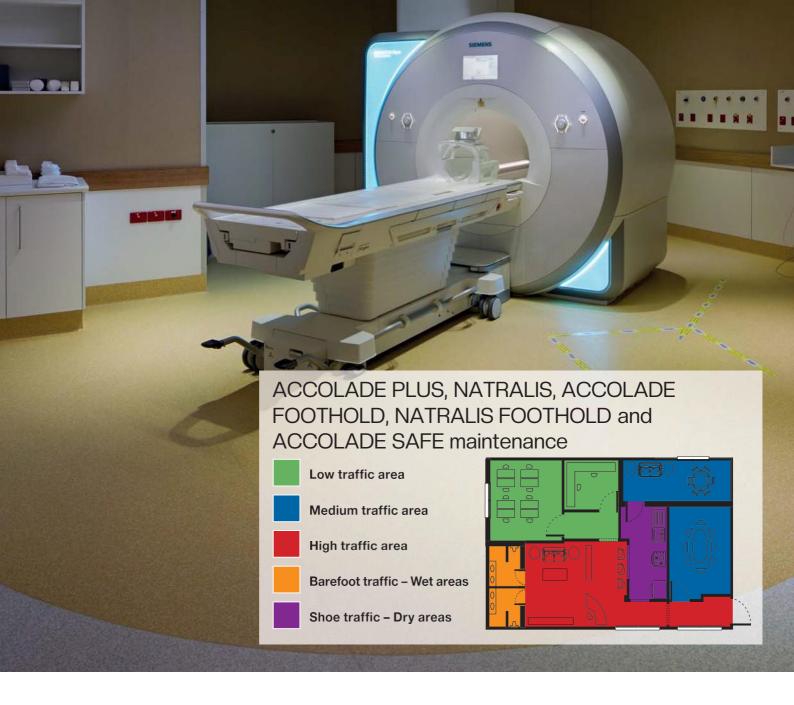

ACCOLADE PLUS & NATRALIS maintenance



>Low traffic areas

Daily

Sweep, static dust mop and/or vacuum thoroughly to remove all dirt and dust. Damp mop, using pH neutral floor cleaner.

Quarterly

Wet Scrub, using an automatic scrubbing machine fitted with a medium nylon brush (or similar), red or blue pad and pH neutral floor cleaner. Spot scrub around edges and fixtures using a soft bristled broom.

Dry burnish, burnishing should only be carried out on a clean floor using a single disc straight line polisher up to 1700RPM, use white pad only or up to 600RPM swing polisher using red pad (this process enhances floor protection).

ACCOLADE PLUS & NATRALIS maintenance



>Medium traffic areas

Daily

Sweep, static dust mop and/or vacuum thoroughly to remove all dirt and dust. Damp mop, using pH neutral floor cleaner.

Quarterly

Wet Scrub, using an automatic scrubbing machine fitted with a medium nylon brush (or similar), red or blue pad and pH neutral floor cleaner. Spot scrub around edges and fixtures using a soft bristled broom.

Dry burnish, burnishing should only be carried out on a clean floor using a single disc straight line polisher up to 1700RPM, use white pad only or up to 600RPM swing polisher using red pad (this process enhances floor protection).



> High traffic areas

Daily

Sweep, static dust mop and/or vacuum thoroughly to remove all dirt and dust. Damp mop, using pH neutral floor cleaner.

Quarterly

Wet Scrub, using an automatic scrubbing machine fitted with a medium nylon brush (or similar), red or blue pad and pH neutral floor cleaner. Spot scrub around edges and fixtures using a soft bristled broom.

Dry burnish, burnishing should only be carried out on a clean floor using a single disc straight line polisher up to 1700RPM, use white pad only or up to 600RPM swing polisher using red pad (this process enhances floor protection).

ACCOLADE PLUS & NATRALIS PUR²)



Polyurethane Coating

ACCOLADE PLUS / NATRALIS incorporates a generous polyurethane bonded surface treatment.

Polyurethane through mix

ACCOLADE PLUS / NATRALIS incorporates polyurethane throughout its thickness contributing to its excellent maintenance characteristics and outstanding durability.

ACCOLADE FOOTHOLD& NATRALIS FOOTHOLD maintenance

> Barefoot traffic - Wet areas



Daily

Sweep and/or vacuum thoroughly to remove all dirt and debris.

Spot clean as necessary using pH neutral floor cleaner.



Weekly - Small areas

Wet Scrub, using soft bristled broom and pH neutral floor cleaner.

Rinse clean to remove excess.



Weekly - Large and unobstructed areas

Wet Scrub, using an automatic scrubbing machine fitted with a medium nylon brush (or similar) and pH neutral floor cleaner. Spot scrub around edges and fixtures using a soft bristled broom. Rinse clean.



Frequency and type of maintenance required depends on traffic flow, application, environmental conditions and customer requirements. Light and accent colours can require more maintenance; where practical choose darker more camouflaging colours.

Protection:

- 1. Use walk-off mats at entrance to trap sand and grit as they are abrasive and can damage floors. Ensure that walk-off mats are cleaned frequently.
- 2. Ensure all furniture legs have well maintained non-abrasive feet.

ACCOLADE SAFE maintenance







Sweep, static dust mop and/or vacuum thoroughly to remove all dirt and dust. Damp mop, using pH neutral floor cleaner.



Weekly - Small areas

Wet Scrub, using soft bristled broom and pH neutral floor cleaner. Clean mop to remove excess. For Accolade Safe, avoid the use of highly acidic, caustic or solvent agents such as toilet bowl cleaner.



Weekly - Large and unobstructed areas

Wet Scrub, using an automatic scrubbing machine fitted with a medium nylon brush (or similar) and pH neutral floor cleaner. Spot scrub around edges and fixtures using a soft bristled broom. For Accolade Safe, avoid the use of highly acidic, caustic or solvent agents such as toilet bowl cleaner.

> Shoe traffic - Dry areas



Daily

Sweep, static dust mop and/or vacuum thoroughly to remove all dirt and dust. Damp mop, using pH neutral floor cleaner.



Weekly - Small areas

Wet Scrub, using soft bristled broom and pH neutral floor cleaner. Clean mop to remove excess.



Weekly - Large and unobstructed areas

Wet Scrub, using an automatic scrubbing machine fitted with a medium nylon brush (or similar) and pH neutral floor cleaner. Spot scrub around edges and fixtures using a soft bristled broom.

Frequency and type of maintenance required depends on traffic flow, application, environmental conditions and customer requirements. Light and accent colours can require more maintenance; where practical choose darker more camouflaging colours.

Protection:

- 1. Use walk-off mats at entrance to trap sand and grit as they are abrasive and can damage floors. Ensure that walk-off mats are cleaned frequently.
- 2. Ensure all furniture legs have well maintained non-abrasive feet.

Microscopic imaging demonstrates how ACCOLADE PLUS responds to regular burnishing.

In between regular cleaning, traffic can cause scuffing and abrasion to the floor, allowing dirt, dust and grit to attach to the surface, compromising the floor's appearance.


Cleaning with pH neutral floor cleaner and a mop or using an automatic scrubbing machine removes this build up prior to burnishing.

Burnishing your clean floor helps remove minor scuffs and scratches keeping your floor looking great.

> ACCOLADE PLUS as originally installed



> ACCOLADE PLUS before and after burnishing



Burnished area

ArmstrongFlooring

Contact:

Braeside Mills Operations Pty Ltd t/as Armstrong Flooring™

29 - 39 Mills Road, Braeside, 3195 Victoria Australia

For further information and samples: Australia Freecall 1800 632 624 or contact us via our website

www.armstrongflooring.au