





Accredited for compliance with ISO/IEC 17025

NATA is a signatory to the ILAC Mutual Recognition was a signatory to the mutual recognition of the equivalence of testing, medical testing, calibration

OIL-WET INCLINING PLATFORM SLIP RESISTANCE TEST

Natralis Foothold

Prepared for: Armstrong Flooring Pty Ltd

Deep Shah

29-39 Mills Road

BRAESIDE VIC 3195

Specimen Description: Natralis Foothold, 550x1000 mm.

No. of Specimens: 1 off

Surface Structure: Structured

Specimen Preparation: Washed with water and pH neutral detergent, rinsed then dried.

Specimen Configuration: Unfixed

Test Direction: Test direction not applicable.

Joint Type & Width: N/A

Air Temperature: 23°C

Test Standard: AS 4586:2013 Slip resistance classification of new pedestrian

surface materials, Appendix D - Oil Wet Inclining Platform Test

Test Shoe: Leipzig V73-SP

Test Location: ATTAR 44-48 Rocco Drive, Scoresby, VIC, 3179

Test Date: 13 July 2022

Test Personnel: Dale Siegle and Daniel King

Displacement Space	Not tested	
(rounded to the nearest 0.5cm³/dm²):	Not lested	
Displacement Space Assessment Group	Not tested	
(Appendix E, AS 4586 - 2013):	Not tested	
Corrected mean overall acceptance angle (α _{ave})	19°	
(rounded down to the nearest degree):	19	
Classification:	R11	

These results apply only to the specimens tested and it is recommended that before selection of flooring or paving materials the effect of service conditions, including maintenance procedures and wear on their slip resistance be checked.

Reviewed By:

Daniel King BSc/BEng (mat) Hons., MIEAust General Manager - Compliance Services

Approved Signatory

Dale Siegle

Technical Consultant - Compliance Services

Approved Signatory



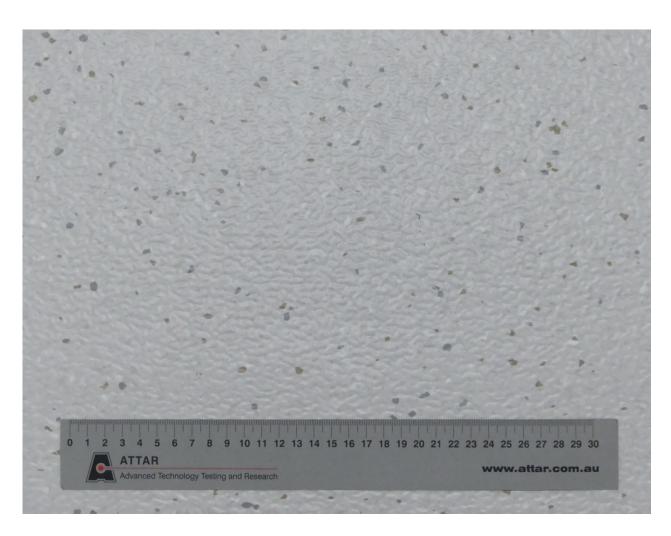


Figure 1: Natralis Foothold



<u>CLASSIFICATION CRITERIA – AS 4586 - 2013</u> <u>Oil Wet Inclining Platform Test – Appendix D</u>

Compliance

TABLE 5: CLASSIFICATION OF PEDESTRIANSURFACE MATERIALS ACCORDINGTO THE OIL-WET INCLINING PLATFORM TEST

Classification	Angle, degrees
No Classification	<6
R9	≥6 <10
R10	≥10 <19
R11	≥19 <27
R12	≥27 <35
R13	≥35