

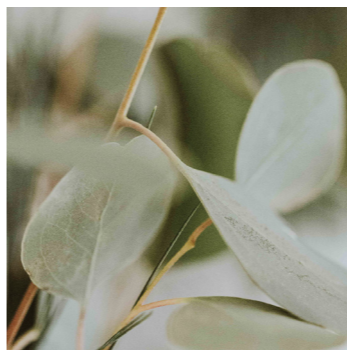
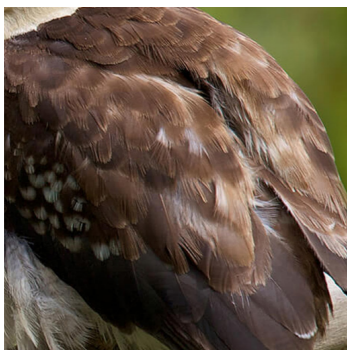










**Armstrong** Flooring™

**Natralis®**  
**Natralis Foothold™**  
Homogeneous Vinyl Sheet

Natralis® reflects the authentic colours and unique beauty found in the landscapes and animals of Australia. Play with colour, connect with place.



Colour swatches may vary between digital brochure to real life product and are to be used as a guide only.

**Natralis**® homogeneous commercial sheet vinyl flooring is highly durable, easy to clean, low maintenance, and meets high performance criteria.

#### The Australian Made Advantage

Armstrong Flooring is proud to be Australia's only manufacturer of commercial vinyl sheet flooring and a company that has been innovating and investing in local production since the 1960s.

The Natralis™ range has all the benefits that go with local manufacturing, including local technical and colour laboratories, product development facilities and an ISO Certified production plant that offers wide product choice, choice, 'quick ship' as standard and bespoke colour options.

The Natralis™ range is made in Melbourne and all colours are available as stock items from our warehouse in Braeside.

#### Product Stewardship

We are committed to the highest quality and manufacturing standards. Our products are:

Phthalate free

Ultra low VOC 50 g/m<sup>2</sup>/hr

100% recyclable

Best Practice PVC

GreenTag rated

Made using best environmental practices



#### Applications

Natralis™ homogeneous vinyl sheet commercial flooring meets high performance criteria for applications such as Healthcare, Aged Care, Education and Hospitality.

#### Performance

The Natralis™ range incorporates an exclusive polyurethane formulation, a through pattern construction and is enhanced with an embossed polyurethane reinforced surface. This delivers ultimate protection, exceptional performance and ease of maintenance (easy cleaning).



**Exceptional durability** consistent appearance, superior wear and abrasion resistance, withstanding heavy boot and rolling load traffic.

**Chemical resistance** optimum surface profile for chemical resistance, easy cleaning and easy maintenance.




**Waterproof Appraised** by Branz to meet the NCC. Deemed to Satisfy Performance Requirements for use as waterproofing membranes for internal wet areas when installed to specified requirements.


**Hygienic Unique** formulation and surface profile promotes easy cleaning and resistance to soiling. Additional infection control can be obtained with easy to heat weld and flash covers for high risk areas.




**Low Maintenance** with no polish required means reduced lifetime costs, less cleaning time needed.

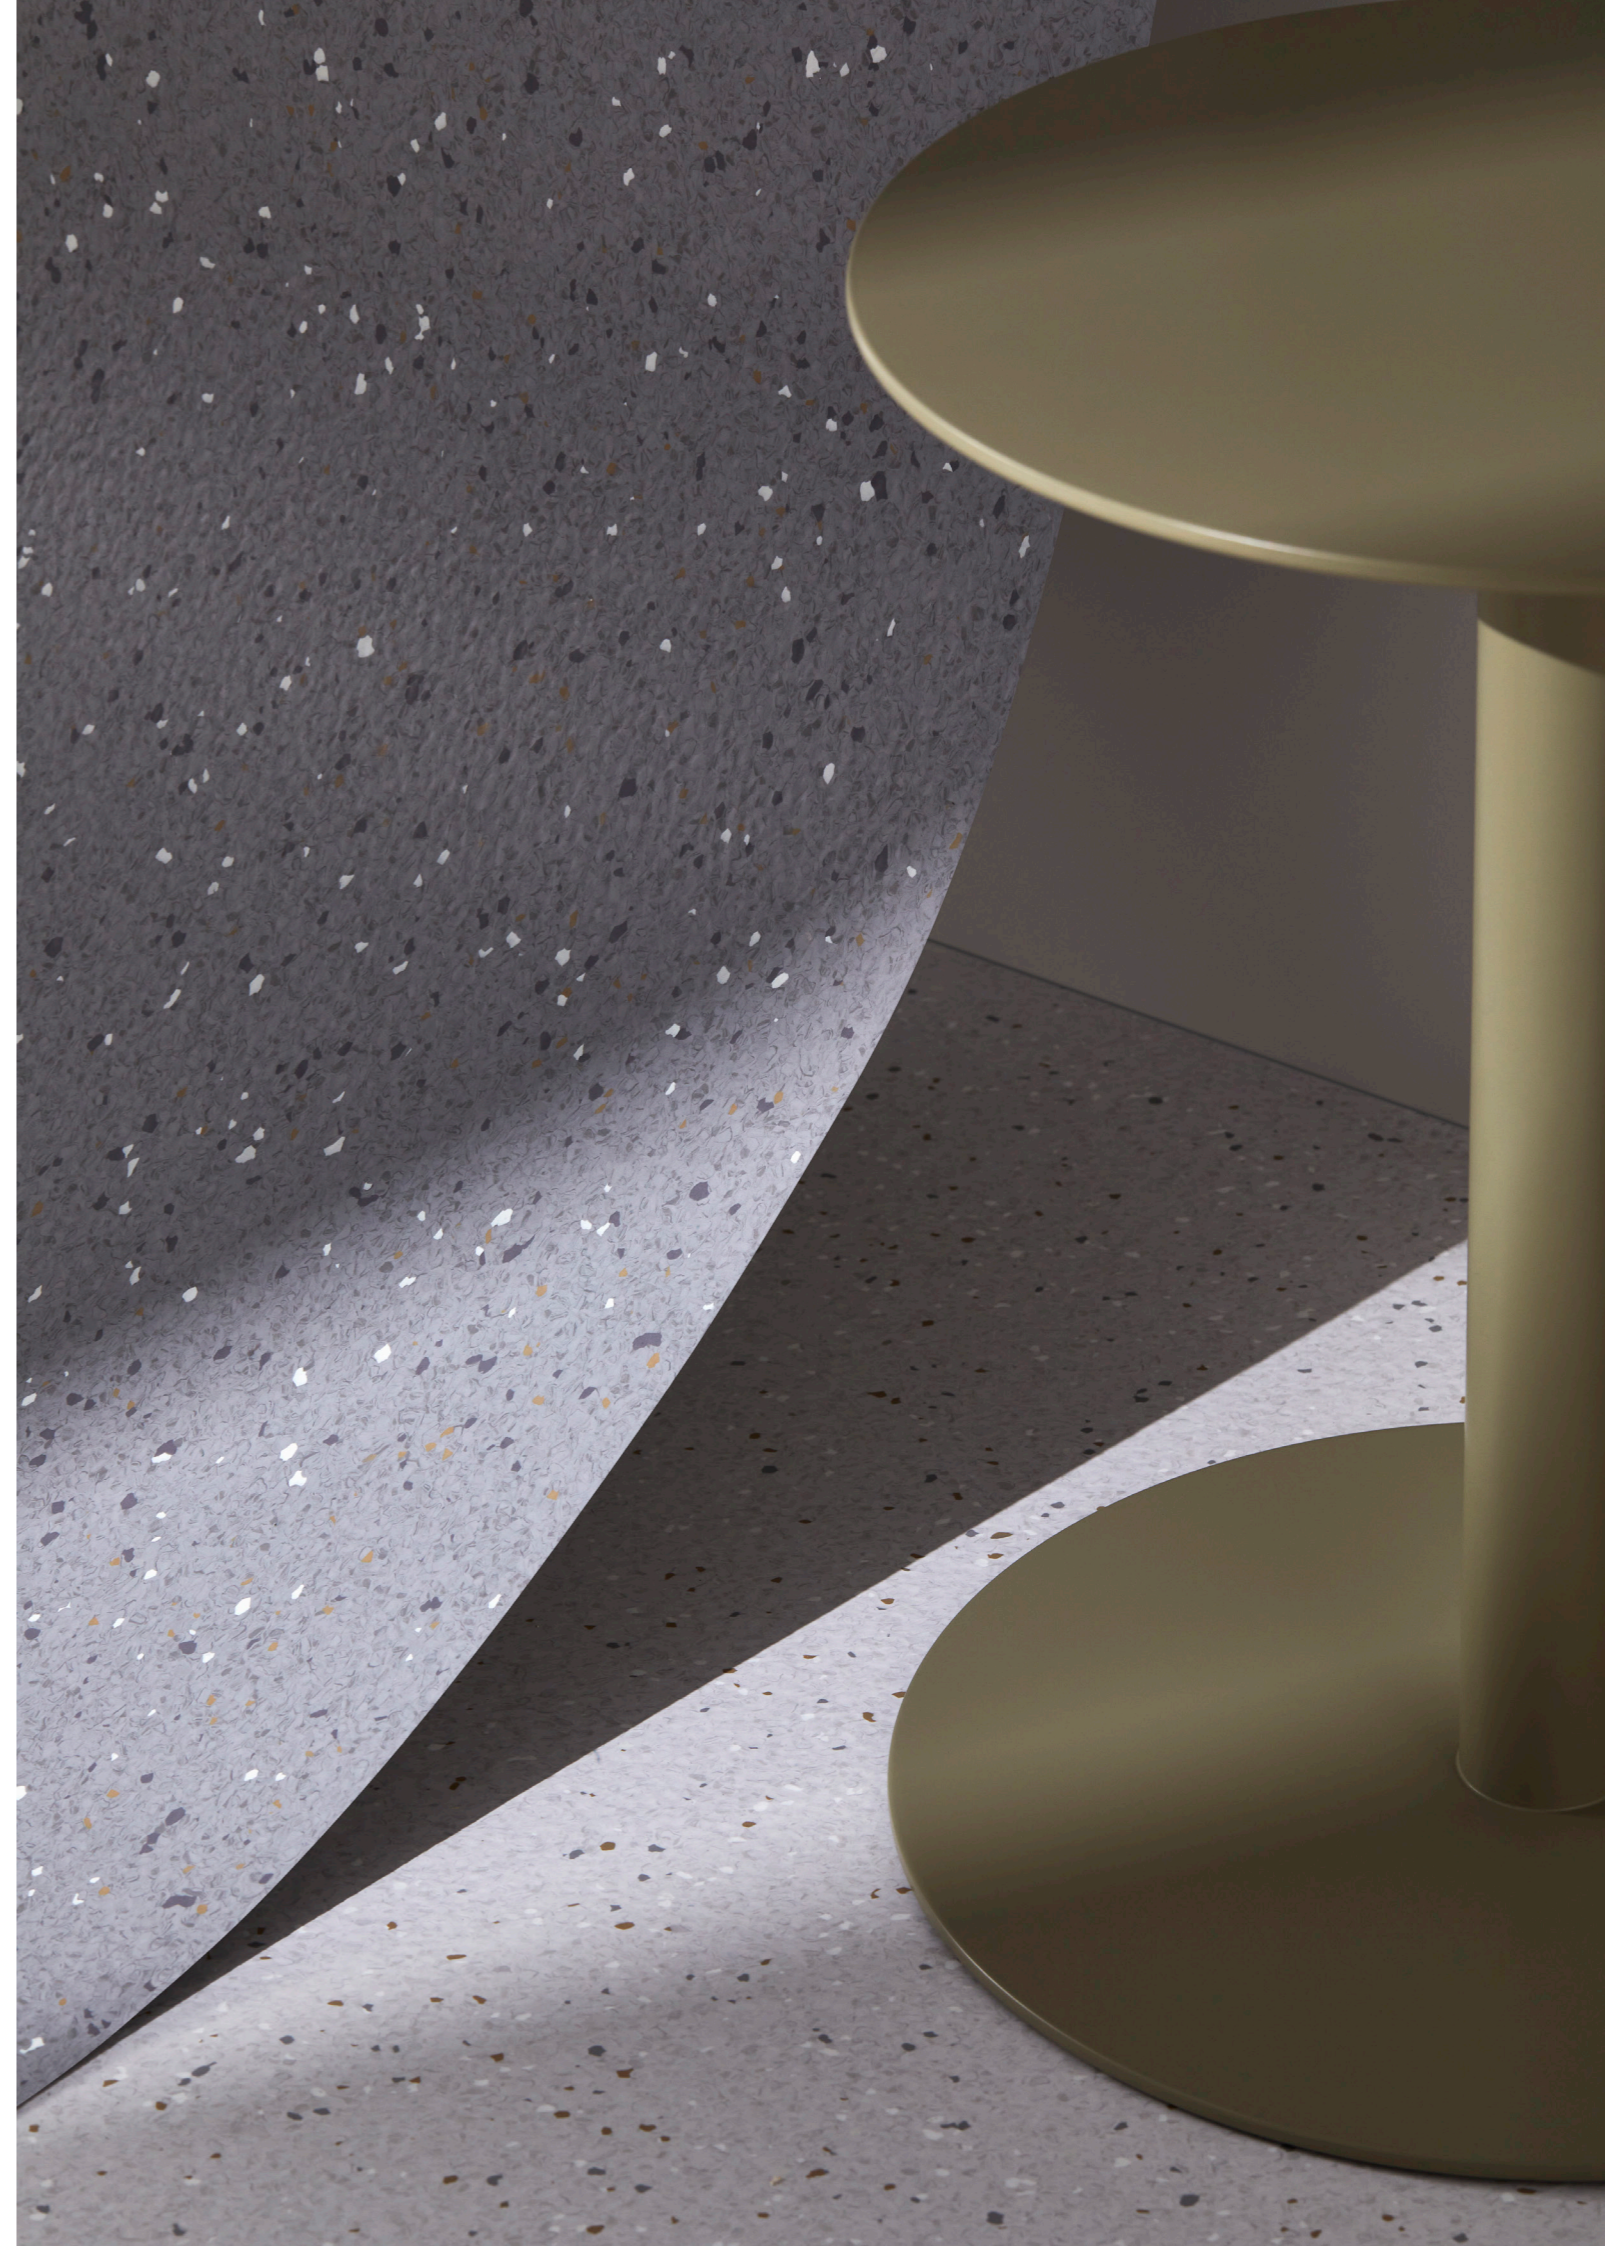


**Natralis®**  
 Inspired by Australia  
 Made in Australia

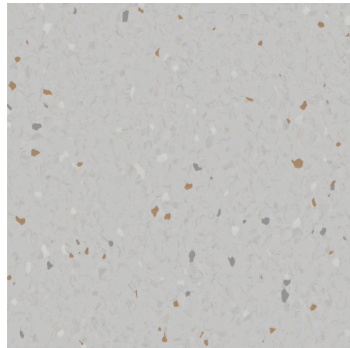


Bilby 5R502211 LRV62.54

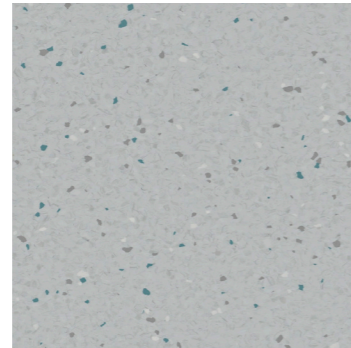


Saltbush 5R502241 LRV58.28

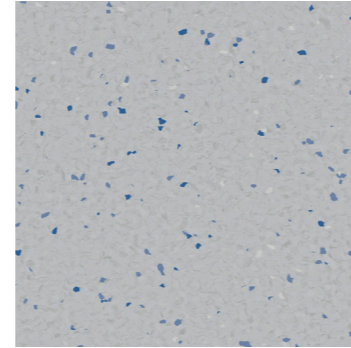


Clovelly Beach 5R502271 LRV55.58

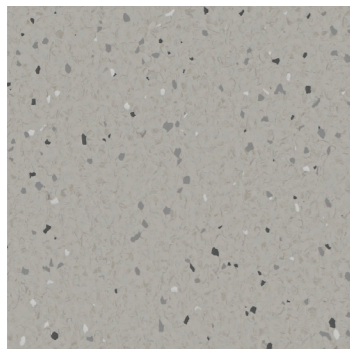


Wallaroo 5R502121 LRV48.21

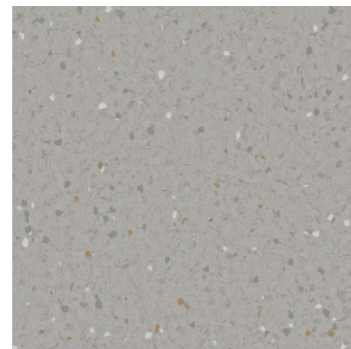


Stringy Bark 5R502221 LRV44.16

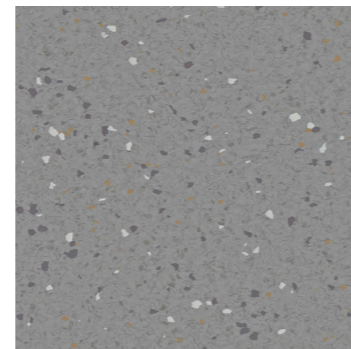


Alpine Gum 5R502231 LRV32.00

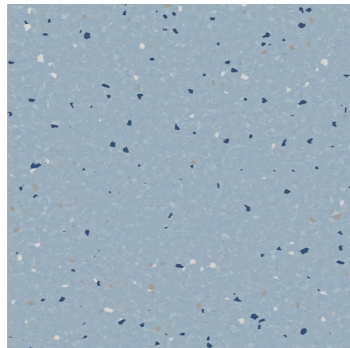


Lilloco 5R502291 LRV39.77

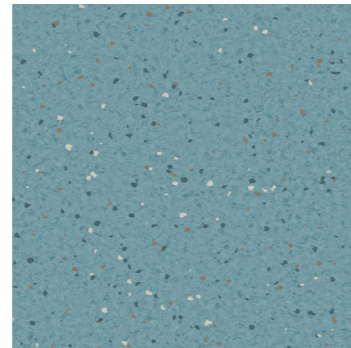

Tea Tree 5R502251 LRV29.51

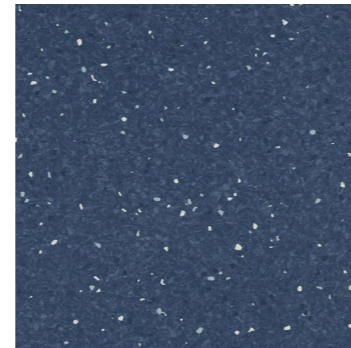

Ningaloo 5R502301 LRV11.46

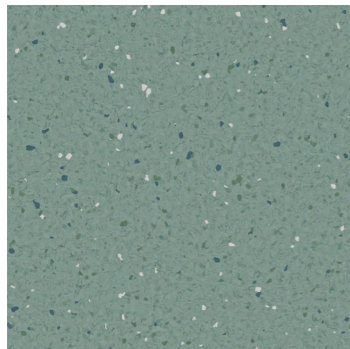


Eucalyptus 5R502321 LRV29.66




**Try Our Visualiser**

Upload your own photo into  
 Design My Room to see  
 Natralis® in your project.




Colour swatches may vary between digital brochure to real life product and are to be used as a guide only.


**Natralis®**  
 Inspired by Australia  
 Made in Australia




Daintree 5R502261 LRV17.70

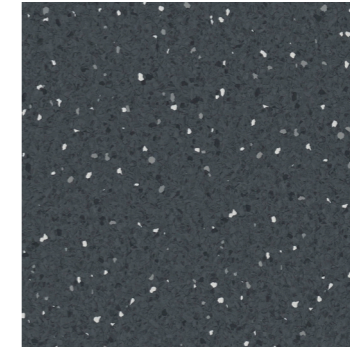


Windjana 5R502111 LRV12.14

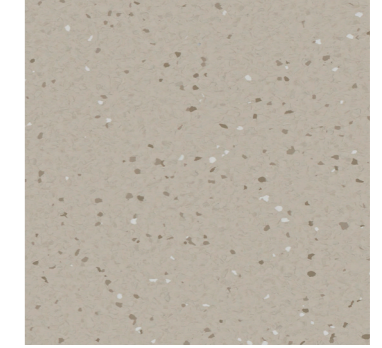


Osprey 5R502181 LRV48.57




Karri 5R502171 LRV42.20

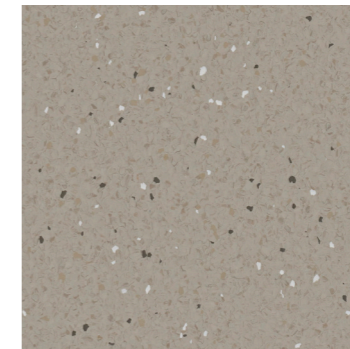


Quokka 5R502191 LRV33.83

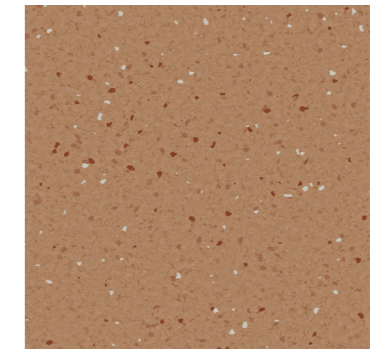


Red Gum 5R502151 LRV29.79




Billabong 5R502161 LRV30.93

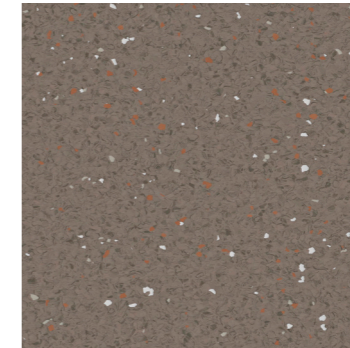


Cape Pillar 5R502311 LRV19.99

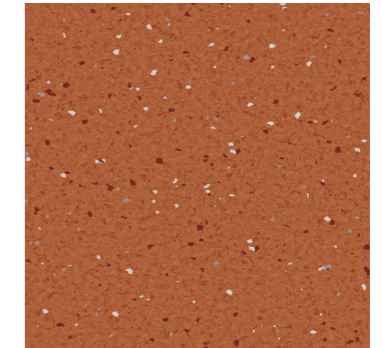


Winton 5R502141 LRV21.31



Karijini 5R502131 LRV16.42

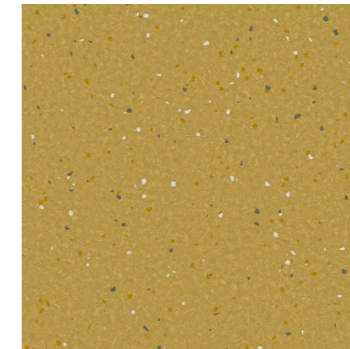

Wattle 5R502281 LRV39.90

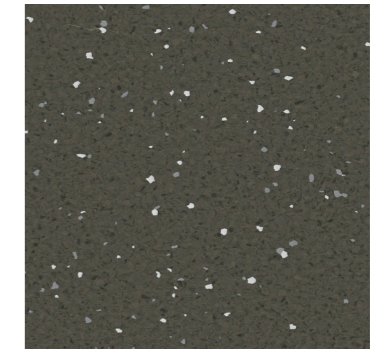

Kookaburra 5R502201 LRV13.14

## Natralis® Foothold

Made in Australia

Ideal for wet areas, Natralis® Foothold™ sheet vinyl flooring features aluminium oxide particles for added slip resistance, encapsulated in a polyurethane surface to aid maintenance and provide additional resistance against staining. It is recommended for use in 'wet barefoot areas', such as ensuites bath and shower rooms.




Timberline Plus  
Life is a Plus | 4X373473  
LRV 34.15


Natralis Foothold  
Billabong | 5R522161  
LRV 30.93

## Natralis® Foothold


Now available for wet barefoot areas in the following colours




Clovelly Beach 5R502271 LRV55.58




Bilby 5R502211 LRV62.54

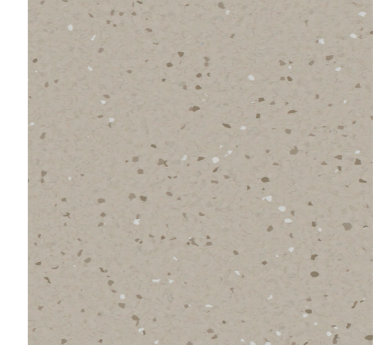


Osprey 5R502181 LRV48.57




Lillico 5R502291 LRV39.77




Wallaroo 5R502121 LRV48.21

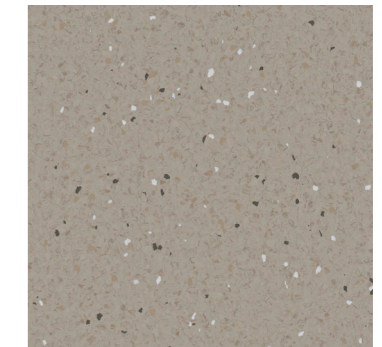


Quokka 5R502191 LRV33.83




Saltbush 5R502241 LRV58.28



Alpine Gum 5R502231 LRV32.00

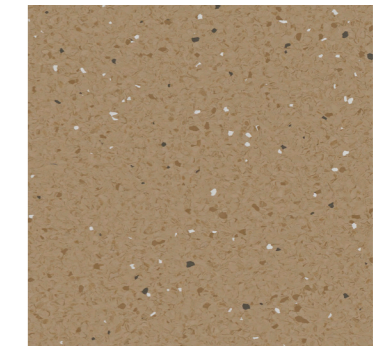

Billabong 5R502161 LRV30.93



Tea Tree 5R502251 LRV29.51



### Discover the Range

#### Product Performance

Slip Performance (AS4586: 2013)  
Appendix A (Wet Pendulum) P4  
Appendix C (Wet-Barefoot) B  
Appendix D (Oil-Wet-Inclining Platform) R11

Colour swatches may vary between digital brochure to real life product and are to be used as a guide only.

# Natralis® | Natralis® Foothold™

183m x 16m x 2.0mm

Product Classification		Natralis®	Natralis Foothold™
Type of floor covering	EN ISO 10581	Homogeneous sheet vinyl	Homogeneous sheet vinyl
Product identification	EN ISO 10581.4.1	Type I	Type I
Commercial classification	ISO 10874	34 (Very Heavy)	34 (Very Heavy)
Light Industrial classification	ISO 10874	43 (Heavy)	43 (Heavy)

## Physical Properties

Manufactured in		Australia	Australia
Roll width	ISO 24341	1.83m	1.83m
Roll length	ISO 24341	16m	16m
Coverage		29.28m <sup>2</sup>	29.28m <sup>2</sup>
Overall thickness	ISO 24346	2.0mm	2.0mm
Product weight	ISO 23997	3.0kg/m <sup>2</sup>	2.9kg/m <sup>2</sup>
Surface texture		Lightly embossed	Embossed
Polyurethane reinforced		Yes	Yes

## Technical Performance

Residual indentation	ISO 24343-1	≤ 0.1mm	≤ 0.1mm
Colour fastness	ISO 105-B02 (Method 3a)	≥ 6 (PASS)	≥ 6 (PASS)
Chemical resistance		Good resistance	Good resistance
Flexibility	ISO 24344, Method A	20mm mandrel (Pass)	20mm mandrel (Pass)
Wear resistance	EN 660-2	Group T	Group P
Castor chair suitability	ISO 4918	Suitable	Suitable
Seam strength	ISO 16906	>240 N/50mm	>240 N/50mm

## Fire & Slip Performance

Wet pendulum	AS 4586 (Appendix A)	P3	P4
	AS 4586 (Appendix C)	-	B
Oil-wet inclining platform	AS 4586 (Appendix D)	R10	R11
Critical radiant flux	ISO 9239-1	≥ 8kW/m <sup>2</sup>	≥ 8kW/m <sup>2</sup>
Smoke development rate	ISO 9239-1	≤ 750% minutes	≤ 750% minutes
Cone calorimeter (walling)	AS 5637.1	Group 3	Group 3

## Installation

Installation to AS 1884	Full stick, heat welded or seambond seams
-------------------------	---

Please note recommendations are a guide only. Refer to relevant local, state, and federal construction codes and standards for requirements.

[armstrongflooring.au](http://armstrongflooring.au)  
[customerservices@armstrongflooring.au](mailto:customerservices@armstrongflooring.au)  
29-39 Mills Rd Braeside, 3195 Victoria  
[1800 632 624](tel:1800632624)

**Armstrong**Flooring™