

ArmstrongFlooring™

Natural Creations™ EarthCuts

Luxury Vinyl Tile



Natural Creations™ EarthCuts

Luxury Vinyl Tile

The Natural Creations™ EarthCuts range features luxurious stone look tiles available in a range of tile formats and thicknesses to suit your project, including new terrazzo and concrete visuals. Thoughtfully designed for modern commercial spaces including retail stores, cafes and restaurants, office spaces as well as residential interiors.

Performance


Natural Creations™ EarthCuts meets high performance criteria on a range of applications and incorporates a high density interlayer and a protective PUR coating that delivers outstanding durability and protection.

EarthCuts is slip resistant (P3 and R10), scratch and scuff resistant and highly durable for commercial and residential wear (0.5mm and 0.7mm wear layer).

Environment & Sustainability

A Green Tag Level A certified range.

Natural Creations™ EarthCuts complies with the highest level industry standards.

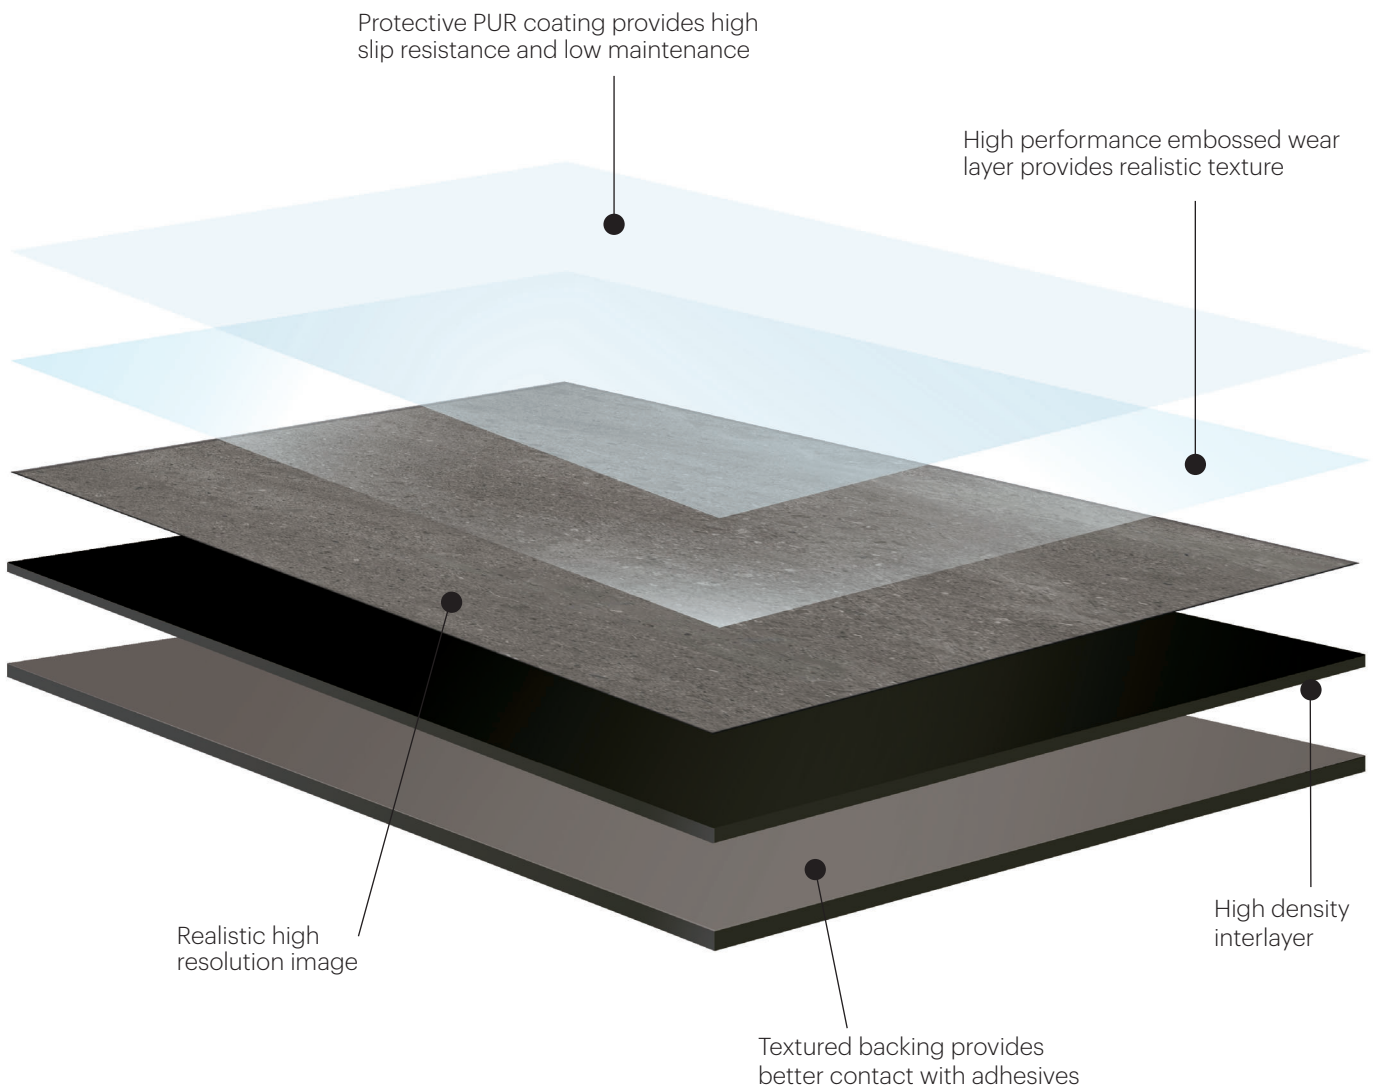

The Collection

Luxury Vinyl Tile

Visual	Format mm	Thickness mm	Visual	Format mm	Thickness mm
Natural Stone			Terrazzo		
Granite Black	457 X 457	2.5	Milano Terrazzo	457 X 914	2.5
Sierra Soft White	457 X 457	2.5	Aggregate Miele	457 X 914	2.5
Slate	457 X 457	2.5	Genova Terrazzo	457 X 914	2.5
Slate	305 X 610	2.5	Firenze Terrazzo	457 X 914	2.5
Sandstone	457 X 457	2.5	Polished Aggregate	457 X 914	2.5
Sandstone	305 X 610	2.5			
Concrete	457 X 457	2.5			
Concrete	305 X 610	2.5			
Polished Grey	914 X 914	2.5			
Polished Concrete – Dark Grey	500 X 500	5.0			
Polished Concrete – Light Grey	500 X 500	5.0			
Raw Crete – Cool Stone	500 x 500	5.0			

APPLICATIONS



Retail



Hospitality



Office



Education



Residential

PERFORMANCE



Slip resistance

- P3 – Wet Pendulum
- R10 – Oil wet inclining platform (ramp)



Hygienic

- Enhanced PUR coating provides resistance to soiling



100% waterproof

- Perfect for areas that often see spills



Stain resistance

- Repels dirt, spills and stains
- Pet and kid friendly



Low maintenance

- Protective PUR coating reduces initial and ongoing maintenance
- Easy to clean



Underfloor heating

- Compatible with underfloor heating system up to 27°C



Sustainable

- GreenTag rated (GreenRate Level A)
- Phthalate Free and Ultra-low VOC




Durable

- 0.55mm commercial wear layer
- Classified as Commercial 33 (heavy) and industrial 42 (general)

Natural Creations™ EarthCuts

2.5mm Luxury Vinyl Tile

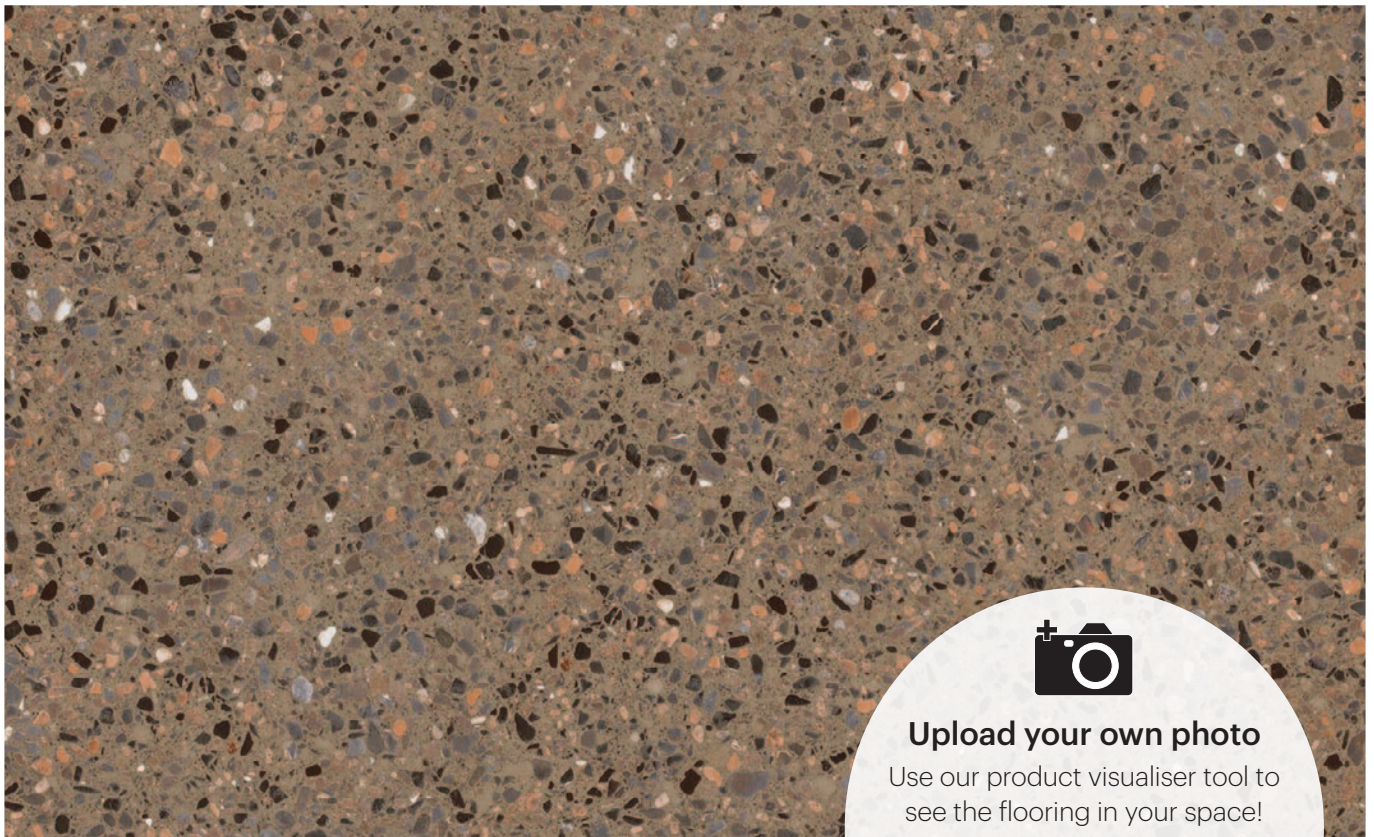

Upload your own photo

Use our product visualiser tool to see the flooring in your space!

Try Design My Room




POLISHED AGGREGATE 2.5 X 457 X 914mm  3L997731




Natural Creations™ EarthCuts

2.5mm Luxury Vinyl Tile

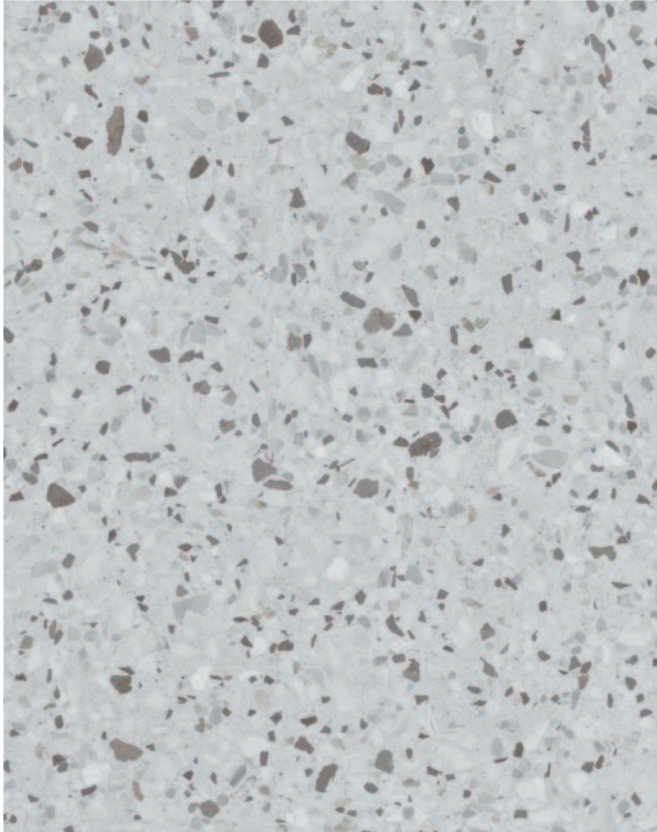


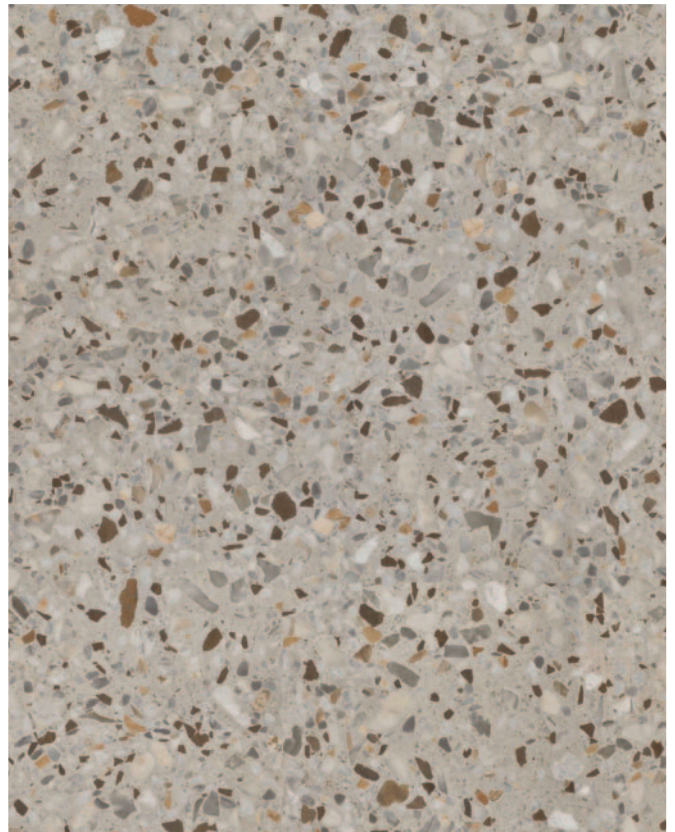
FIRENZE TERRAZZO 457 X 914mm  3L258114



GENOVA TERRAZZO 457 X 914mm  3L225854



AGGREGATE MIELE 457 X 914mm  3L773104



MILANO TERRAZZO 457 X 914mm  3L225884



Firenze Terrazzo
3L258114



RETAIL



Milano Terrazzo
3L225884



Natural Creations™ EarthCuts

2.5mm Luxury Vinyl Tile



SLATE 457 X 457mm  3L233174 | SLATE 305 X 610mm  3L233173



SANDSTONE 457 X 457mm  3L233134 | SANDSTONE 305 X 610mm  3L233133

Natural Creations™ EarthCuts

2.5mm Luxury Vinyl Tile



CONCRETE 457 X 457mm  3L223204 | CONCRETE 305 X 610mm  3L223203



GRANITE BLACK 457 X 457mm  3L161708



SIERRA SOFT WHITE 457 X 457mm  3L400539



Sierra Soft White
3L400539



Natural Creations™ EarthCuts

5.0 x 500 x 500mm Luxury Vinyl Tile



POLISHED CONCRETE - DARK GREY 500 X 500mm ■ 3X907060



POLISHED CONCRETE - LIGHT GREY 500 X 500mm ■ 3X907040




RAW CRETE - COOL STONE 500 X 500mm ■ 3X900548

Natural Creations™ EarthCuts

2.5 x 914 x 914mm Luxury Vinyl Tile



POLISHED GREY 914 X 914mm  3L990706






Polished Grey
3L990706



Natural Creations™ EarthCuts

Luxury Vinyl Tile

Product Classification

Type of floor covering	EN / ISO 10582	Heterogeneous – Luxury Vinyl Tile				
Domestic classification	ISO 10874	23 (Heavy)				
Commercial classification	ISO 10874	33 (Heavy)				
Light industrial classification	ISO 10874	42 (General)				

Physical Properties

Overall thickness	ISO 24346	2.50mm / 5.00mm*				
Wear layer thickness	ISO 24340	0.55mm / 0.70mm^				
Polyurethane reinforced	—	Yes				
Squareness and straightness	ISO 24342	Deviation allowed at any point				
≤ 400mm		≤ 0.25mm (Pass)				
> 400mm		≤ 0.35mm (Pass)				
Bevelled edge	—	Yes				
Size (mm)	ISO 24342	457 X 457	305 X 610	457 X 914#	914 x914	500x 500*
Packaging	Tiles/carton m ² /carton	16 3.34	16 2.97	8 3.34	6 5.01	6 1.50

Technical Performance

Residual indentation	ISO 24343	≤ 0.1mm (Pass)
Colour fastness	ISO 105-B02	≥ 6 (Pass)
Wear resistance	EN 660-2	Group T
Effect of castor chair	ISO 4918	> 25,000 cycles (Pass)
Dimensional stability	ISO 23999	≤ 0.25% (Pass)

Fire & Slip Performance

Critical radiant flux	AS ISO 9239-1	≥ 8kW/m ²
Smoke development rate	AS ISO 9239-1	≤ 750%.minutes
Wet pendulum	AS 4586 (App. A)	P3
Oil-wet inclining platform	AS 4586 (Appendix D)	R10

Environment & Sustainability

GBCA rating	—	GreenTag Level A
Recyclable	—	Yes
TVOC Emissions	EN 13419-1	Compliant low emitting VOC emissions

Installation

Installation to current AS1884	Full stick, LVT-100 adhesive recommended as per Armstrong's installation instructions
--------------------------------	---

* 5mm only available in Polished Concrete – Dark Grey & Light Grey and Raw Crete - Cool Stone.

^ 0.7mm wear layer only available in Polished Grey and Polished Aggregate.

Polished Aggregate available in 10 tiles/carton and 4.17m²/carton only.

Armstrong Flooring™
29 – 39 Mills Road, Braeside, 3195 Victoria Australia Visit
www.armstrongflooring.au or contact Customer Service
on 1800 632 624 for technical data, installation, cleaning
and maintenance instructions

