





Accredited for compliance with ISO/IEC 17025 -Testing

NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, medical testing, calibration and inspertion reports

OIL-WET INCLINING PLATFORM SLIP RESISTANCE TEST

Quantum sheet vinyl

Prepared for: Armstrong Flooring Pty Ltd

Deep Shah

29-39 Mills Road

BRAESIDE VIC 3195

Specimen Description: Quantum sheet vinyl, 500x1020 mm.

No. of Specimens: 1 off

Surface Structure: Structured

Specimen Preparation: Washed with water and pH neutral detergent, rinsed then dried.

Specimen Configuration: Unfixed

Test Direction: Test direction not applicable.

Joint Type & Width: N/A
Air Temperature: 23°C

Test Standard: AS 4586:2013 Slip resistance classification of new pedestrian surface

materials, Appendix D - Oil Wet Inclining Platform Test

Test Shoe: Leipzig V73-SP

Test Location: ATTAR 44-48 Rocco Drive, Scoresby, VIC, 3179

Test Date: 16 June 2021

Test Personnel: Marcus Braché and Dale Siegle

Displacement Space	Not tested	
(rounded to the nearest 0.5cm ³ /dm ²):		
Displacement Space Assessment Group	Not tested	
(Appendix E, AS 4586 - 2013):		
Corrected mean overall acceptance angle (α_{ave})		
(rounded down to the nearest degree):	12	
Classification:	R10	

These results apply only to the specimens tested and it is recommended that before selection of flooring or paving materials the effect of service conditions, including maintenance procedures and wear on their slip resistance be checked.

Marcus Braché

Senior Engineering Technician

Approved Signatory

Awel Guled

Reviewed By:

Compliance and Test Technician

Approved Signatory

This report may not be reproduced except in its entirety



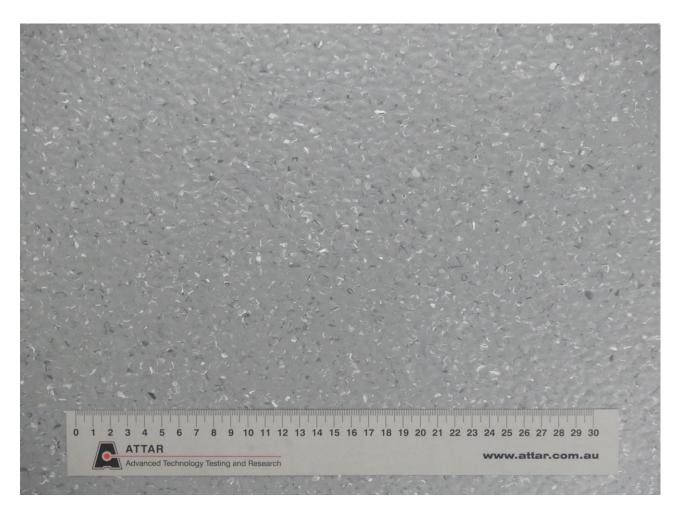


Figure 1: Quantum sheet vinyl



CLASSIFICATION CRITERIA – AS 4586 - 2013 Oil Wet Inclining Platform Test – Appendix D

Compliance

TABLE 5: CLASSIFICATION OF PEDESTRIANSURFACE MATERIALS ACCORDINGTO THE OIL-WET INCLINING PLATFORM TEST

Classification	Angle, degrees
No Classification	<6
R9	≥6 <10
R10	≥10 <19
R11	≥19 <27
R12	≥27 <35
R13	≥35