


QUICK GUIDE 145W USB-C 4-PORT GAN TRAVEL CHARGER

REPLACING OUTLET ADAPTER

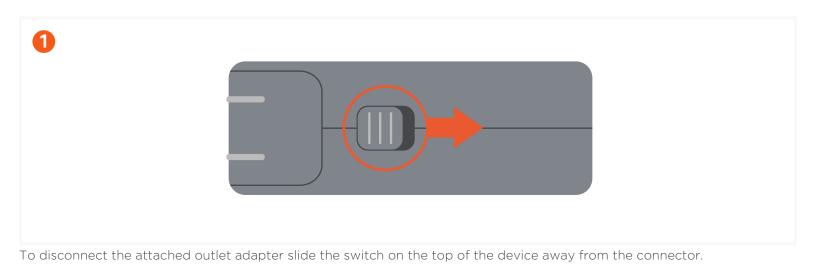

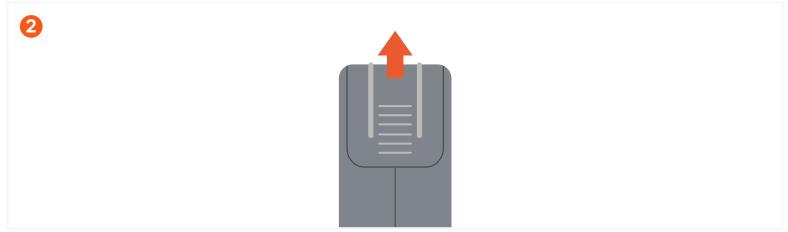


Slide the released outlet adapter up.

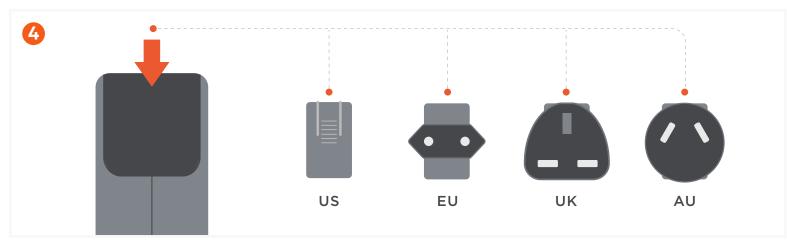


Choose the compatible outlet adapter for your region and slide it in into place.

CHARGING YOUR DEVICES

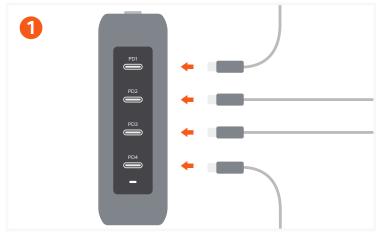

Plug in cables (sold separately) to charger's USB-C PD ports.

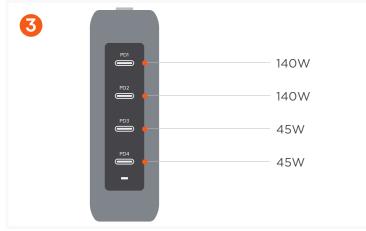


Connect and charge up to four USB-C devices at a time. Total max output is 145W

4			
	PDI	PD1 + PD2	65W + 65W
		PD1 + PD3	100W + 45W
		PD1 + PD4	100W + 45W
	PD3	PD2 + PD3	100W + 45W
	PD4	PD2 + PD4	100W + 45W
	-	PD3 + PD4	25W + 20W

Single port connection



Dual port connection

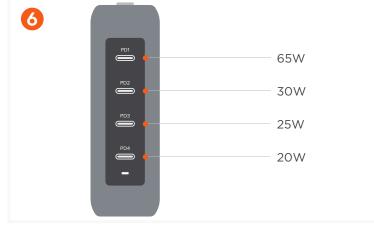

Four port connection

PD1 & PD2 will adjust power output depending on which port the largest device is connected to

PD1 & PD2 ports support PD 3.1 @ 140W.

140W charging speed on PD1 or PD2 ports can be acheved only if single port is in use.

Must use compatible MagSafe cable to reach 140W charging speeds.