

# LUMINA 7W LED




Type : Recessed down light  
 Frame Material/finishing : Aluminium/ Painting  
 Body Material/ Finishing : Di-casting Aluminium/ Painting  
 Reflector Material : imported High specular aluminium  
 Chip : CREE 3000K/4000K  
 Driver : 36.6V 180mA  
 Dimmable : optional  
 Input Volt. : 220-240V 50/60Hz  
 Power : 8W (Total Power:10W)  
 Luminous flux Type : 432LM  
 CCT : 3000K  
 CRI : Ra80  
 Beam Angle : 35°/60°

### PRODUCT CODE:

IFL-LED7W3R WHi-	WHITE 3000k 60deg
IFL-LED7W3R4K WHi-	WHITE 4000k 60deg
IFL-LED7W3R BLi-	BLACK 3000k 60deg
IFL-LED7W3R4K BLi-	BLACK3000k 60deg
IFL-LED7W3R WHi35-	WHITE 3000k 35deg
IFL-LED7W3R4K WHi35-	WHITE 4000k 35deg
IFL-LED7W3R BLi35-	BLACK 3000k 35deg
IFL-LED7W3R4K BLi35-	BLACK3000k 35deg

## WARM WHITE

Luminous Intensity Distribution Curve

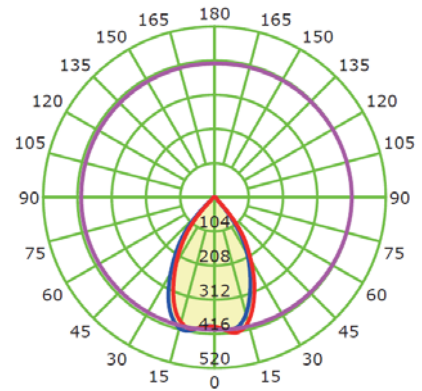

Unit: cd  
 — C0-C180  
 — C90-C270  
 — G9

Distance(m)	E (lx)	Dh(m)	Dv(m)
1.0	393.27	1.25	1.24
2.0	98.32	2.51	2.47
3.0	43.70	3.76	3.71
4.0	24.58	5.01	4.95
5.0	15.73	6.27	6.18
6.0	10.92	7.52	7.42
7.0	8.03	8.77	8.66
8.0	6.14	10.03	9.89
9.0	4.86	11.28	11.13

Beam Angle: H64.1 V63.5 Field Angle: H88.8 V88.6

