

2015+ WRX

2014-2018 Forester XT

2010-2012 Legacy 2.5 GT

INSTALLATION INSTRUCTIONS

TOOL LIST

L Key Wrench

PART LIST



Air Shields x1

L key bolt x1

Alluminum Bracket x 1

First, position the bracket to sit under the Air Shields, and put the L key bolt on. Tighten the bolt with just 1 or 2 threads, keep it loose but make sure it won't fall out

Note : The bolt would be tightened after it's placed on top of the inter-cooler. Keep it loose for now to have room for adjustments.

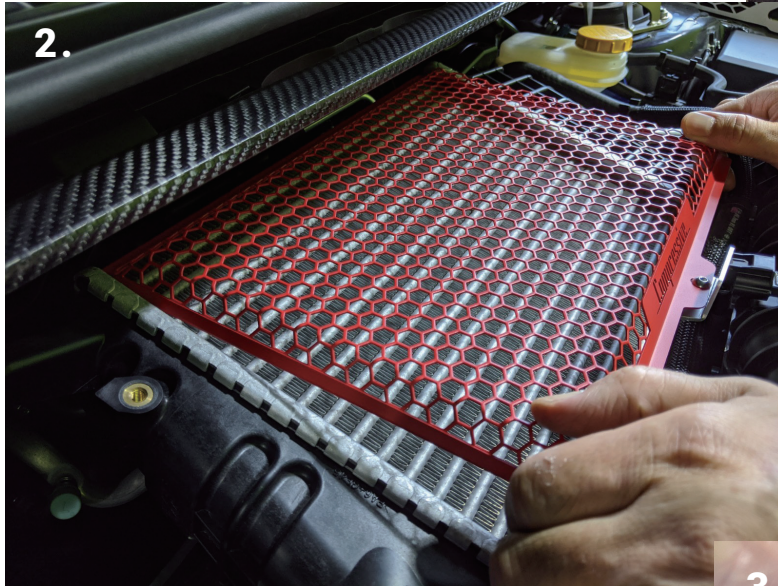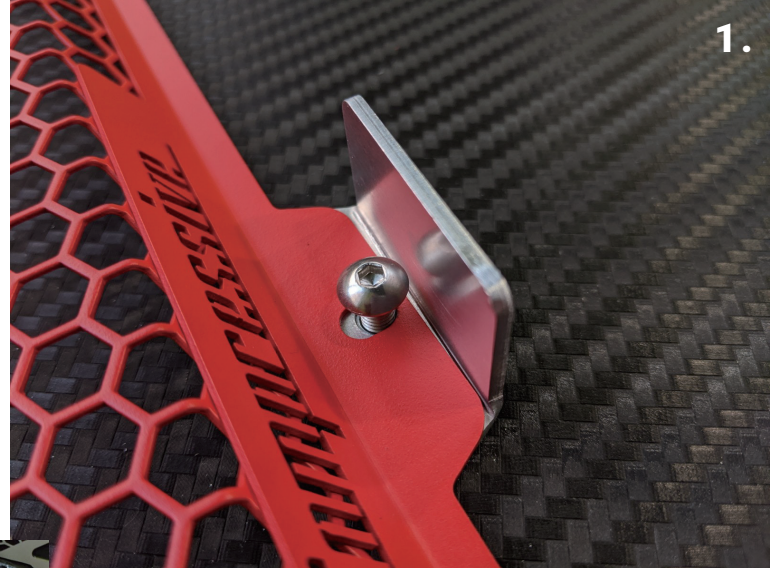

Next, remove the engine cover, and use the built-in bracket on the Air Shields to hook it to upper edge of the inter-cooler.



Note : Use this bracket to hook the upper edge of inter-cooler.

After the Air Shields is in place, hold the alluminum bracket and use L key to tighten the bolt. Make sure the Air Shields does not move after installation, then put the engine cover back on.

Note : The alluminum bracket and Air Shields should sandwich the lower edge of Inter-cooler as shown.

