

AMBIUS SENSOR RANGE

SPECIFICATION SHEET


Product Code: ASECPIRDUO

Pronto Code: Q5080960

Wall mount



Ceiling mount



TECHNICAL SPECIFICATIONS

- 220-240V 50~60Hz
- Rated load:
2000W Max. (incandescent lamp)
1000W Max. (energy-saving lamp).
- IP54
- 180° Detection range, 12m detection distance.
- Choose between Ceiling or Wall mount.

INSTALLATION:



- Note two sensor faces to create greater detection angle.
- Rotate sensor to achieve either wall or ceiling mount.
- Attach base to the ceiling/wall and then clip sensor onto base once wire connection is set-up.
- Rear is notched for corner mount (see below).







MOUNT ON CORNER



MOUNT IN CORNER



*Dimensions shown are subject to manufacturing tolerance.

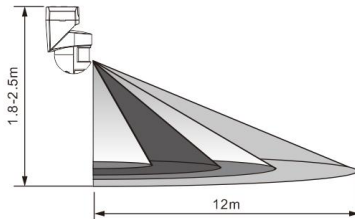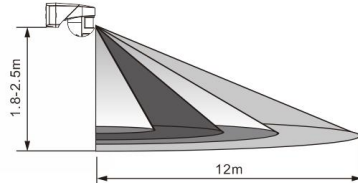

Detection Range

Detection Range maximum of 12m.



Detection Angle

Detection angle of 180 degrees from point of sensor application.



Ingress Protection

Rated IP54, allowing for installation in an covered outdoor area.



Lux Adjustment

Ambient light: 10-2000LUX which is adjustable. Use Sun and LUX dials to choose sensor options.



Max 1000W LED

Rated load:
2000W Max. (incandescent lamp) &
1000W Max. (energy-saving lamp).



Time On Adjustment

Time adjustment:
Min: 10sec±3sec
Max: 15min±3min

Distributed by:

CDB

GROUP

PO Box 100-707
North Shore Mail Centre
Auckland

Manufactured to Ambius Lighting's specifications in the PRC.