

FMH Series



STAINLESS STEEL FLEXIBLE HOSE - Standard GB/T14525-2010 -



Features


- Standard GB/T14525-2010
- High Pressure Rated (Steam, Chemical and Gas)
- Flexible & Built-in Union
- Suitable for Food Processing
- 100% Leak & Pressure Tested

Specifications

- SS316 Corrugated Tube & SS304 Braiding
- Q235A Carbon Steel Fittings
- 750°F Max. Temperature
- 230 psi Max. Pressure
- NPT Threaded Ends

Ref#	Description
1	Carbon Steel Female Fitting
2	Carbon Steel Union
3	Carbon Steel Outer Sleeve
4	Carbon Steel Inner Sleeve
5	SS316 Corrugated Tube
6	SS304 Braiding
7	Carbon Steel Male Fitting

Size	1/2"	3/4"	1"	1-1/4"	2"
Length	12"	12"	12"	12"	12"
	18"	18"	18"	18"	18"
	24"	24"	24"	24"	24"
	30"	30"	30"	-	-
	36"	36"	-	-	-
	48"	48"	-	-	-
	60"	-	-	-	-

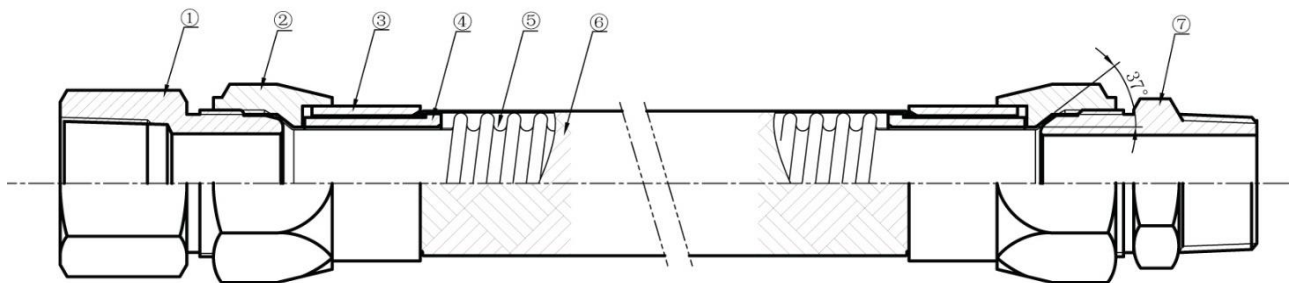

Copyright©2021 Höt-Steam® All rights reserved.

Ver.2301